

NOVEMBER/DECEMBER 1981
ISSUE NUMBER 40

PRICE \$3.00

THE ORIGINAL MAGAZINE FOR
TRS-80™* OWNERS

H & E **COMPUTRONICS** INC.

*TRS-80™ IS A TRADEMARK OF TANDY CORPORATION



A beautiful match, the Smartmodem and the TRS-80. Your TRS-80 can talk with other computers, over the telephone lines. And with no acoustic losses or distortions. Access time-sharing systems and information utilities such as the Source,* CompuServe† and MicroNet.

Direct hook-up with no interference noises. The Smartmodem hooks to the telephone line just like a modular telephone, simply insert in a wall jack.

"Love at first sight" — your TRS-80 and the Smartmodem!

Brawny — because it does so many things. Auto-dial and auto-answer features built in. With the Smartmodem, your TRS-80 can automatically dial the telephone, answer the telephone, receive and transmit, and hang up the telephone. Completely unattended.

Pulse dialing or Touch-Tone. ** The Smartmodem can be connected to any telephone system in the U.S. because it allows pulse-dialing, Touch-Tone dialing or a combination of the two. FCC approved.

Program controllable in any language using ASCII character strings. This is a unique

Hayes Stack

Microcomputer Component Systems

feature of the Hayes Smartmodem.

Brainy — because it does them all so simply. Seven LED indicators on the front panel give you visual signals of the status of the Smartmodem: MR — Modem Ready, SD — Send Data, CD — Carrier Detected, etc. The audio monitor feature lets you "listen in" on the call being dialed and the connection made. You are immediately alerted to busy signals, wrong numbers, etc. Over 30 different commands can be entered directly from your TRS-80 keyboard, including the unique "Set" commands which allow you to select and change various optional parameters such as dialing speed, escape code character, length of

time for a dial tone, and number of rings to answer. There are 17 "Set" commands. The Smartmodem is completely compatible with the Bell-103 type modems, the type of modem most time-sharing systems have. Operation can be in full or half-duplex, with a transmission speed of 0-300 baud.

The Smartmodem is ready to "get-together" with your TRS-80.


TRS-80 Model II and TRS-80 Color Computers have RS-232 serial ports and can immediately interface with the Smartmodem. Expansions that permit use of the Smartmodem with TRS-80 Model I and Model II are available through your TRS-80 dealer.

Match your TRS-80 with a Hayes Smartmodem for a sophisticated, high performed data communication system. Available at computer stores nationwide (except TRS-80 dealers) — call or write for the location nearest you. And don't settle for anything less than Hayes.



Hayes Microcomputer Products, Inc.
5835 Peachtree Corners East,
Norcross, Georgia 30092 (404) 449-8791

Your TRS-80 computer
and the Hayes Stack™ Smartmodem.
Beauty, Brains, and Brawn!

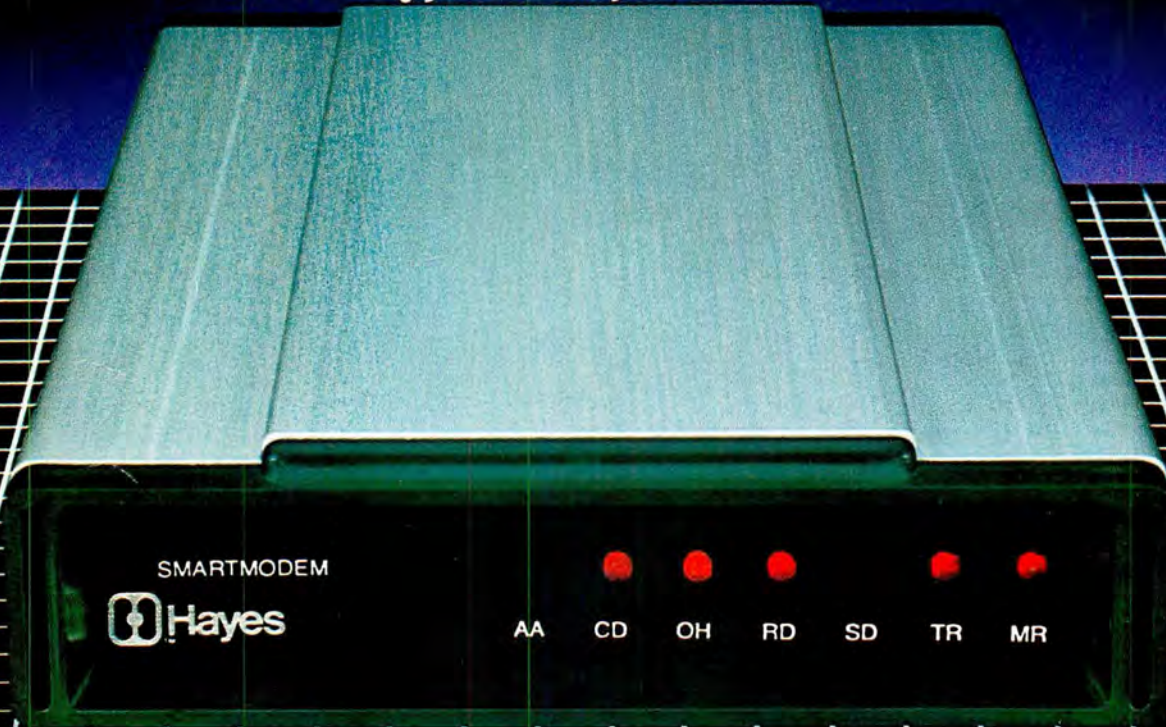

PUBLISHER

Howard Y. Gosman

BUSINESS MANAGER

Steven M. Kahan

EDITOR-IN-CHIEF

Hubert S. Howe, Jr.

BUSINESS EDITOR

Peter Shenkin

MANAGING EDITOR

Martin Leffler

CONTRIBUTING EDITORS

Robert M. Richardson

Joseph Rosenman

Gordon Speer

Sherry M. Taylor

A. A. Wicks

ADVERTISING DIRECTOR

Kevin Rushalko

ART DIRECTOR

Edmund Khaleel

QUALITY CONTROL

Harvey Cohen

OFFICE MANAGER

Beatrice Kahn

SOFTWARE MANAGER

Darlene Bell

CUSTOMER SERVICE

Robert Williams

INVENTORY CONTROL

Michael Bernstein

SHIPPING MANAGER

Joan Marchick

PRODUCT DEVELOPMENT

Richard Kaplan

PRODUCTION

Adele Damiano

Eileen Medansky

Anna Mistrulli

Sheryl Streim

NOVEMBER-DECEMBER 1981

ISSUE NUMBER 40

CONTENTS

FEATURES

- 14 Program Previews A. A. Wicks
Typing Tutor and Morse Code Trainer
- 22 GRAFF-PAC Neil Fishman and Jeff Platzman
A program for string packing
- 26 Beginner's Corner Sherry M. Taylor
Peripherals and Paraphernalia for the TRS-80, Part II
- 28 Savings Account Jay R. Newirth
Maintain a permanent record of your savings
- 37 Practical Business Programs... S. M. Zimmerman and L. M. Conrad
Depreciation Expense
- 42 Three BASIC Programs..... Gordon Speer
Curves, Canada Mileage, and Chemquiz
- 44 Screen Writer Joseph Rosenman
Video Masthead Generation Program
- 47 Salary Rate Charts Frank P. Vlamings
Chart your salary or income
- 48 Disassembled Handbook for TRS-80, Vol. 4 ... Robert M. Richardson
Chapter 8: ASCII Radio Teletype Transmit Program

REGULAR DEPARTMENTS

- 2 Bits and Pieces Howard Y. Gosman
Publisher's Remarks
- 4 The Crystal Ball
New Products from Radio Shack and others
- 8 Letters to the Editor
Readers tell us what's on their minds
- 55 Model III Corner..... Hubert S. Howe, Jr.
About the TRS-80 Model III only
- 56 Questions and Answers..... Hubert S. Howe, Jr.
Answers to questions from readers
- 58 Color Computer Corner Joseph Rosenman
Information about the TRS-80 Color Computer
- 68 Advertising Directory

Entire contents copyright © 1981 by H & E Computronics, Inc. All rights reserved. Printed in the United States of America.

All correspondence should be addressed to The Editor, H & E Computronics, Inc., 50 North Pascack Road, Spring Valley, NY 10977. Unaccepted manuscripts will be returned if accompanied by sufficient first class postage. H & E Computronics will not be responsible for the return of unsolicited manuscripts, cassettes, floppy diskettes, program listings, etc. not submitted with a self-addressed, stamped envelope. Opinions expressed by the authors are not necessarily those of H & E Computronics, Inc.

Material appearing in the *H & E COMPUTRONICS MAGAZINE* may be reprinted without permission by school and college publications, personal computing club newsletters, and nonprofit publications. Only original material may be reprinted; that is, you may not reprint a reprint. Each reprint must carry the following notice on the first page in 7-point or larger type:

Copyright © 1981 by H & E Computronics, Inc., 50 North Pascack Road, Spring Valley, NY 10977.

Please send us two copies of any publication that carries reprinted material.

ADVERTISING RATES

Contact Advertising Director for rate card. Special discounts available for multiple insertions.

EUROPEAN DISTRIBUTOR

IN BELGIUM

WSOFT
Centre du demonstration:
279, Avenue Louise
1050 Bruxelles (Belgium)
Telephone (02) 640.57.59

BITS AND PIECES

Howard Y. Gosman

Issue Number 40

Even though the masthead says "November-December 1981", this is still issue number 40 of *Computronics*. Because of extensive comments from readers and advertisers, we have decided to try to have the magazine in your hands by the first day of the month of the cover date. Rather than putting out two issues in one month, we are accomplishing this by changing the cover date, and "November-December 1981" is thus the transitional month. In terms of your subscription, this issue still counts as one month, but the ending date of your subscription will now be one month later than before.

This change will place us approximately on the same schedule as other computer magazines, and, as

I mentioned above, the magazine ought to be in your hands by the first day of the month.

Diagnostic is Here

Our cover photograph this month is an artist's conception of a "sick" computer whose problems need to be diagnosed by a program such as the new System Diagnostic for the Models I and III (actually different programs for each computer) from Howe Software. We have seen and sold many different kinds of diagnostic programs in the past, but none is as complete and thorough as this one. It is a program similar to those used by repair technicians, designed to test every component of your TRS-80 for proper functioning. There are

continued on page 6

The *H & E COMPUTRONICS MONTHLY NEWS MAGAZINE* is published by H & E Computronics, Inc., 50 North Pascack Road, Spring Valley, New York 10977. The *H & E COMPUTRONICS MONTHLY NEWS MAGAZINE* is not sponsored, nor in any way officially sanctioned by Radio Shack, a division of Tandy Corporation.

The purpose of the *H & E COMPUTRONICS MONTHLY NEWS MAGAZINE* is to provide and exchange information related to the care, use, and application of the TRS-80™ computer systems. H & E COMPUTRONICS, Inc. does not take any financial responsibility for errors in published materials. Users are advised to check and edit vital programs carefully.

The *H & E COMPUTRONICS MONTHLY NEWS MAGAZINE* encourages comments, questions, and suggestions. H & E COMPUTRONICS will pay contributors for articles and programs published in the magazine.

The *H & E COMPUTRONICS MONTHLY NEWS MAGAZINE* is typeset by Photonics, Ltd., 188 Highwood Ave., Tenafly, NJ 07670, and is printed by Kay Offset Printing Service, Inc., 154 Grand Street, New York, NY 10013.

SUBSCRIPTION RATES

\$24 per year	SURFACE MAIL	U.S. Only
\$36 per year	FIRST CLASS MAIL	U.S.
\$36 per year	AIR MAIL	Canada and Mexico
\$48 per year	AIR MAIL	Outside U.S., Canada and Mexico
\$3 per copy	Single Copies	U.S., Canada and Mexico
\$4 per copy	Single Copies	Outside U.S., Canada and Mexico

Foreign subscriptions and sales should be remitted in U. S. funds drawn on a U.S. bank.

YOUR SUBSCRIPTION HAS EXPIRED IF . . . THE NUMBER ABOVE YOUR NAME AFTER THE DASH ON YOUR MAILING LABEL IS 40 (OR LESS). THE NUMBER FOLLOWING THE DASH TELLS YOU THE LAST ISSUE THAT YOU WILL RECEIVE. For example, if your subscription number is 16429-40, your subscription expires with this issue (issue #40).

THE ULTIMATE TEST . . .

THE ROCK OF STALINGRAD

You, your microcomputer, and the German Sixth Army against the fanatical Russian Defenders of Stalingrad. You must use the elements of fifteen Infantry and Armored Divisions to breach the 6 x 18 sector map to wrest mastery of the city and possession of the River Volga from the Red Army. Can you successfully drive the Russians from the city and change the course of history? Or will you too dash the Sixth Army to pieces on **The Rock of Stalingrad?**

At your disposal are thirty-nine elite, undefeated Regiments with all their supporting Engineers and Artillery. Your advance will be resisted at every step by the thirty Brigades which are the remnants of the Russian Sixty-second Army which have desperately dug in at every woods, house and factory. Stalin's order is explicit: "Any officer who retreats without orders will be shot." No retreat orders have been issued to the **The Rock of Stalingrad**.

Requires 32K - Price: \$29.99

Other fine games from **BENCHMARK** **✓ SOFTWARE**

RUTTER

When sailors first left the European Continent to explore the new world, they sailed into unknown waters with no map or guide. The few who returned home brought with them a priceless record, the Rutter, which told everything they needed to repeat their voyage: which compass heading to follow, where reefs were sighted, where storms were encountered, and where to find gold and trade. You are about to embark on such a voyage with a fleet of five ships. On your voyage you will encounter natural phenomena such as gales, reefs, and St. Elmo's Fire. You will also encounter acts of man such as pirates and enemy ships which sink your ships, and changing economic conditions in Europe which can turn your cargo in your holds into fabulous wealth or excess ballast. When you return with treasure or valuable rutters your fame and fortune will increase. But first you must find your way through 100 locations of uncharted seas, and then return . . .

Requires 16K - Price: \$24.99

ENCHANTED FOREST

"You are at the edge of the forest, paths lead to the northwest, south, and west. A weather beaten sign beside the western path says 'Entrance to the Enchanted Forest! Only fools take this path! Consider yourself warned!'"

The time of decision has come. You know there are only dead ends to the northwest. You were repulsed by the attack of the fire breathing hellhound to the south. You muster your courage, take a deep breath, and plunge westward into the forbidden forest . . .

"You fool! You were warned not to come this way! Now you are completely lost! ! !"

Only those who master the Enchanted Forest can win this provocative 71 room adventure game.* But mastering the forest is not enough! Can you conquer the nine foot zombie and the other fiends which wait on the other side of the forest? And what are you going to do about that fire breathing hellhound?

* 54 location version is available for 16K users.

16K Version - Price: \$19.99

32K Version - Price: \$24.99

Specify tape or disk (disk must have 32K), Computer type, memory size, and number of disk drives.

Name _____

Street _____

City _____ State _____ Zip _____

TRS-80 MODEL I ☐ TRS-80 MODEL III ☐ APPLE II ☐

MEMORY _____ K DISK DRIVES _____

Enclose check or money order payable to: "Benchmark Software".

Mail to: 1050 Eve Drive

Suite A

Pittsburgh, PA 15216

Quantity	GAME	Tape	Disk	Amount
_____	_____	_____	_____	\$ _____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____
_____	_____	_____	_____	_____


Pennsylvania Residents add 6% sales tax _____

TOTAL ENCLOSED \$ _____

MICROSETTE CASSETTES



**C-10 C-20
COMPUTER CASSETTES**



**C-60 C-90
AUDIO CASSETTES**

Microsette, the undisputed industry leader in short cassettes for micro-computer applications also offers equally high grade audio cassettes at budget prices. Credit card buyers may phone (415) 968-1604.

LOOK AT OUR PRICES

Length	10 Pack	50 Pack
C-10	\$ 7.50	\$32.50
C-20	\$ 9.00	\$39.00
C-60	\$13.50	\$57.50
C-90	\$17.50	\$77.50

UPS shipment in Cont. USA incl.
We can not ship to P.O. Boxes

Length	Qty.	Price	Total
SUBTOTAL			
Calif. Cust. add Sales Tax			
TOTAL			

Check or money order enclosed ☐
Charge to: Visa ☐ Master Card ☐
Account No. _____
Expiration Date _____

SIGNATURE _____

MICROSETTE CO.
475 Ellis Street
Mt. View, CA 94043

THE CRYSTAL BALL

(News and Rumors of Interest to TRS-80™)

1. A Florida company is currently developing a version of the **TRS-80 Model III** in which one of the two built-in floppy disks is replaced by a **5 megabyte hard disk drive**. This will be an extremely attractive business computer, which will have many times the storage capacity of the maximum-sized Model II. The floppy disk is still an important part of the system. It will be used for loading programs from other sources into the computer, and for backup storage of files from the hard disk. By our calculations, it will take at least 27 floppy diskettes to back up the entire capacity of the hard disk. We don't yet know what the projected price of this machine will be.

2. The biggest news in personal computing concerns the giant **AT&T** being allowed (by a New Jersey U. S. District Court) to enter the computer field through a separate subsidiary, striking down a 1956 decree by which AT&T agreed not to enter the unregulated telecommunications market. Right on the heels of the decision was an announcement by CBS, Inc. that it is close to a joint venture agreement with the Bell System to test interactive (two way) home computer information delivered (naturally) over the telephone lines! CBS owns a broadcast and publishing empire and would have complete control over the home computer data base. An in-depth study by International Resource Development, Inc., a Connecticut research firm, said that subscribers will pay an average of \$78 monthly per household for home-delivered computerized data by 1990! IRD said that AT&T will also be a major supplier of videotex terminals

and had previously forecast CBS's entrance into the electronic publishing arena.

3. What's happened to *Apple Computer*? That's what financial experts around the nation are asking. Apple stock (a new issue) was snapped up at \$22 and quickly shot to a high of \$36 per share. It has now slipped to less than half that! There are some theories, however. Among them are high level management problems, the less-than-successful Apple III, increased competition from abroad, and the newly introduced IBM personal computer, which insiders say will hit Apple the hardest. (IBM plans to offer 24-48 service on a "swap out" basis for an annual fee of 10% to 15% of the purchase price.) One analyst said that what Apple needs are new products. Is there an Apple IV or V on the horizon?

4. **Radio Shack** has lost the co-designer of the TRS-80 Model I. Steven Leininger left Radio Shack to start his own consulting business. (Don French, whom Leininger worked with on the Model I hardware and software, left RS about two years ago.) Leininger had worked in product development for five years while at Tandy. Rumors are that he was dissatisfied with Tandy management.

In other Radio Shack news, Tandy has teamed up with Data-point Corporation to allow its Model II to be used on Data-point's ARCnet, a small business computer network. A new eight-inch hard disk drive with 8.4 megabytes of storage will be introduced before the end of the year for the Model II. Tandy has

continued on page 6

8 USEFUL PRODUCTS

NEW PRODUCT
Photograph not available
at time of printing.

1 PRINTSWITCH

- Printer selector switch module allows two printers to be connected to a single TRS-80 system. Printer to be used is selected by switch.
- THE PROBLEM** of plugging and unplugging printer cables in order to select one printer or the other is eliminated by PRINTSWITCH.
- Small, unobtrusive design keeps your system *uncluttered*. Conveniently located switch allows instant access to either of your printers.
- Will work with any two similar or dissimilar parallel printers or printing systems including: dot matrix, daisy wheel, plotters, TRS-80 converted selectrics, etc.
- BUSINESS SYSTEMS** benefit from the ability to readily select one of two printers. For example a high speed dot matrix printer can be used for data, program listings and first drafts and a slower correspondence quality

printer utilized to generate letters, reports, etc.
•**SIMPLE TO CONNECT.** Plugs directly into the parallel printer port of your TRS-80 and provides an edge connector for each of your two printer cables.
•**PRINTSWITCH** comes completely assembled, tested, and ready to use with connector and instructions. *Printswitch A* is for model I and III, *PRINTSWITCH B* is for model II. Please specify when ordering. *PRINTSWITCH A* or B.... **ONLY \$59.00**

2 PRINTER EXTENDER CABLE

- Adds 4 ft. to your existing printer cable. Our extension connects between your Expansion Interface and your present printer cable.
- High quality cable and gold plated contacts ensure reliable connection. **ONLY \$27.50**

3 TIMEDATE 80

- Complete, self contained "true" real time clock/calendar. *TIMEDATE 80* continues to keep accurate time and date when the computer is turned off or experiences a power failure.
- SET IT ONCE**, and it's two replaceable "AAA" batteries (not included) keep *TIMEDATE 80* running in excess of 3 years.
- The instant power is applied to the TRS-80, *TIMEDATE 80* provides accurate MO/DATE/YR, DAY of WEEK, HR:MIN:SEC and AM/PM information.
- REPLACES** the computer's internal clock. If power fails and then restores, only *TIMEDATE 80* will update the system with current *TIME* and *DATE* information, an impossibility with the computer's internal clock.
- QUARTZ CRYSTAL** based, *TIMEDATE 80* is accurate to within a few seconds per month.

- PLUGS DIRECTLY** into the TRS-80 keyboard and gives the "TIMES" function even without an Expansion Interface. In disk systems, it plugs into the Expansion Interface. An optional "Y" connector provides for further expansion.
- TIMEDATE 80*'s small size keeps the computer table tidy. If you have an Expansion Interface, *TIMEDATE 80* literally "DISAPPEARS" by slipping into the empty space in the bottom of the interface.
- Two sets of software, on cassette, come with *TIMEDATE 80*. "TIMES" is a step by step set of simple instructions for setting *TIMEDATE 80*. "TIMES" is a set of poke routines which patches any Disk Operating System to Level II *TIMES* to read *TIMEDATE 80* and is easily incorporated into any user software. "TIMES" will always print the time and date when LISTING a program—great for keeping track of revisions!
- INVALUABLE** for providing accurate date and time information in business applications such as payrolls, receipts, etc.
- FULLY ASSEMBLED** and tested, 90 day warranty, complete with instructions and software on cassette, **\$95.00**, "Y" option, add **\$12.00**.

4 EXPANDABUS

- Connect all of your TRS-80 Model I devices simultaneously on the 40-pin TRS-80 expansion bus. End the hassle of plugging and unplugging your accessories.
- ANY DEVICE** that normally plugs into the Model I TRS-80 keyboard edge connector can be plugged into *EXPANDABUS*.
- For those with an Expansion Interface, *EXPANDABUS* plugs into the Expansion Port connector (located on the left side panel, to the right of the printer port) or between the keyboard and expansion interface.
- EXPANDABUS* is made of the highest quality materials. All gold plated contacts and high grade ribbon cable ensure the most reliable connection possible.
- Protective covers are provided for each connector (as shown on X4 in

- photograph) that can be removed and replaced as needed.
- FOUR STANDARD CONFIGURATIONS** will fill almost any requirement. We recommend that you order the next greater configuration above that which your application demands so that any future expansion will be provided for.
- Two or more *EXPANDABUS* cables can be ganged where more than five connections are needed. Custom configurations are also available. Call us.
- X2...\$29 X3...\$44 X4...\$59 X5...\$74

5 THE ALPHA GREEN SCREEN

- IBM and all other mainframe houses use green screen monitors. The advantages of the green video screen are now widely known. Every TRS-80 user should enjoy the benefits that it provides.
- THE ALPHA GREEN SCREEN** is the only CURVED screen MOLDED exactly to the picture tube shape. It is cut precisely to cover the exposed area of the tube.
- THE FILTER MATERIAL** that we use is just the right shade and density. The result is a screen very pleasant to the eye.
- IMAGE CONTRAST** is increased and screen legibility improved.
- Eye fatigue is reduced by our eye-saving green color and the enhanced readability of text.
- Your system takes on a distinctively professional look.

- THE ALPHA GREEN SCREEN** is the easiest and fastest to install, no fitting, taping, or gluing necessary. Can be removed instantly for cleaning.
- SATISFACTION GUARANTEED**—try the *ALPHA GREEN SCREEN* for 14 days. If, for any reason you are not delighted with it, return it for a full and immediate refund.
- THE ALPHA GREEN SCREEN ONLY \$12.50** Please specify model

6 ANALOG-80:

8 DIGITAL MULTIMETERS PLUGGED INTO YOUR TRS-80!!! Measure Temperature, Voltage, Current, Light, Pressure, etc. Very easy to use. For example, let's read input channel #4. 10 OUT 0.4. Selects input #4 and also starts the conversion. 20 A=INP(0). Puts the result in variable "A". Voila! Specifications: Input range 0-5V to 0-500V. Each channel can be set to a different scale. Resolution: 20mV (on 5V range). Accuracy: 8 bits (5%). Port Address: jumper selectable. Plugs into keyboard bus or E/I (screen printer port). Assembled and tested. 90 day warranty. Complete with power supply, connector, manual. **\$139**

7 INTERFACER-80:

- INTERFACER-80** the most powerful Sense/Control module.
- 8 industrial grade relays: single pole, double throw, isolated contacts. 2 Amp @ 125 Volts. TTL latched outputs are also accessible to drive external solid state relays.
- 8 convenient LEDs constantly display the relay states.
- Simple "OUT" commands (in basic) control the 8 relays.
- 8 optically-isolated inputs for easy direct interfacing to external switches, photocells, keypads, sensors, etc.
- Simple "INP" commands read the status of the 8 inputs.
- Selectable port address. Clean, compact enclosed design. Assembled, tested, 90 days warranty. Price includes power supply, cable, connector, superb user's manual. **\$159**

8 CHAIN BREAKER

LET THE "CHAIN BREAKER" FREE YOUR MINI-DRIVES. End the daisy-chain mess once and for all. Fits all mini-drives: Percom, Aerocomp, Shugart, Micropolis, MTI, Vista, Pertec, Siemens, BASF. Easy to install, just remove the drive cover, plug in the "CHAIN BREAKER" and replace the cover. Voila!!! Now you can change and move your drives around without disassembly. Keep the cover on and keep the dust out. High reliability gold plated contacts, computer grade 34 conductor cable. Tested and guaranteed. Get one for each drive. only **\$13.95**

ALPHA PRODUCT
(800) 221-0916 TOLL-FREE
(212) 296-5916
85 71A, 79th St., Woodhaven, N.Y. 11421

ADD \$2.50 PER ORDER FOR SHIPPING AND HANDLING
ALL ORDERS SHIPPED FIRST CLASS MAIL
WE ACCEPT VISA, MASTER CHARGE, CHECKS, M.O.
COD. ADD \$2.00 EXTRA
QUANTITY DISCOUNTS AVAILABLE
N.Y. RESIDENTS ADD SALES TAX

continued from page 4

also reached an agreement to have the TRS-80 Model III manufactured in France by the French firm Matra.

5. **Beukers Labs** experience with its first two systems was so favorable that it decided to begin automating some of the office procedures. At that point, it put in place a third Tandy Radio Shack TRS-80 Model II, which is used as an information center for the office. Beukers created a data base upon which it can generate its catalogues and other printed information — in essence, it is an electronic filing cabinet. The third system is also used as a word processing machine. Over the last two years, the company has automated much of its operations through the use of the TRS-80 Model II. ■

continued from page 2

separate tests for the ROM, RAM, video display, keyboard, cassette recorder, line printer, disk drives, and the RS-232-C interface. While all of these tests are important, the most extensive are for the disk drives. The manual accompanying the program, which would make

excellent reading for persons merely interested in understanding how the components of the TRS-80 work, contains many details about the disk drives and controller not covered in many books on the subject.

The program begins with a system inventory specification, where you indicate the items that are to be tested. It has both an individual testing mode, where you have to operate or monitor the tests, and a continuous mode, where you can run the program endlessly, with any diagnostic information written to the line printer. At \$99.95 it is an expensive program, but you would actually save money buying one program like this rather than several smaller ones.

Practical Business Programs

This month we inaugurate what we hope will become a regular feature entitled "Practical Business Programs". This month's installment is a depreciation program by Steven M. Zimmerman, Ph.D. of the University of South Alabama College of Business and Management Studies and Leo M. Conrad of Imagineering Concepts. We hope that you will enjoy this series. Let us know what you think.

Complaints

In our "Letters to the Editor" section this month, Keith Greffe of Brockville, Ontario raises several points that I would not like to leave unanswered. It would be best if you read his letter first, before my reply which follows.

Mr. Greffe has many different complaints, but the main ones seem to be that our magazine is expensive and that it is not as much business-oriented as we have promised in the past. Let us deal with the expense issue first, since this is important in these inflationary times.

continued on page 12



Quality Percom products are available from the following authorized Percom retailers. If a retailer is not listed for your area, call Percom toll free at **1-800-527-1222** for the address of a nearby retailer, or to order directly from Percom.

ARKANSAS		
MICROCOMPUTER SYSTEMS, INC.	Hot Springs	(501) 623-5209
ARIZONA		
SIMUTEK	Tucson	(602) 886-5880
CALIFORNIA		
ALPHA BYTE STORES	Calabasas	(213) 883-8594
BERKELEY MICRO COMPUTERS	Berkeley	(415) 848-7122
COMPUTER INFORMATION EXCHANGE	San Luis Rey	(714) 757-4849
COMPUTER SERVICE CENTER	Hollywood	(213) 851-3434
DESMAR ELECTRONICS	Santa Clara	(408) 988-2208
HOBBYWORLD	Northridge	(213) 886-9200
WHOLESALE TECHNOLOGY	Santa Ana	(714) 979-1700
COLORADO		
MICROCOMPUTER APPLICATIONS	Denver	(303) 922-6410
DISTRICT OF COLUMBIA		
THE PROGRAM STORE	Washington	(202) 337-4691
FLORIDA		
EN-TRON, INC.	Largo	(813) 586-5012
MICROCOMPUTER CONSULTANTS	Ormond Beach	(904) 673-5787
MICROSYSTEMS SOFTWARE, INC.	Hollywood	(305) 983-3390
GEORGIA		
DAVIS SYSTEMS, INC.	Atlanta	(404) 634-2300
HAWAII		
COMPUTER CENTER	Honolulu	(808) 488-2171
IDAHO		
OFFICE MAGIC COMPUTERS	Boise	(208) 376-4613
ILLINOIS		
GARCIA & ASSOCIATES	Chicago	(312) 782-9750
KANSAS		
BESCO ELECTRONICS	Shawnee	(913) 268-7633
CARDENS, INC.	Hutchinson	(316) 669-8261
KENTUCKY		
COMPUTER MAGIC	Louisville	(502) 893-9334
MASSACHUSETTS		
OMNITEK	Tewksbury	(617) 851-4580
MARYLAND		
DAMASCUS RADIO SHACK	Damascus	(301) 253-2101
MICHIGAN		
ALTERNATE SOURCE	Lansing	(517) 487-3358
MINNESOTA		
THE CODE ROOM	Eden Prairie	(612) 934-1826
MISSOURI		
LEMBERGER CO.	Vienna	(314) 422-3353
SOFTWARE CENTER	Florissant	(314) 838-7755
NEBRASKA		
COLUMBUS TV	Columbus	(402) 564-5531
CURTRONICS	Lincoln	(402) 423-7771
NEW HAMPSHIRE		
HARDSIDE	Milford	(800) 258-1790
NEW JERSEY		
CHANNEL 1 RADIO SHACK	Medford	(609) 654-7454
NEW MEXICO		
AUTEL ELECTRONICS	Albuquerque	(505) 255-6451
NEVADA		
PCS COMPUTER	Las Vegas	(702) 870-4138
NEW YORK		
H & E COMPUTRONICS	Spring Valley	(914) 425-1535
80 MICRO COMPUTER SERVICES	Cohoes	(518) 235-9007
MICRO 80 SYSTEMS	Brooklyn	(212) 748-3236
STONY CLOVE	New York City	(212) 391-8337
OHIO		
FELDMAN ENTERPRISES	Akron	(216) 724-5583
JERRY'S COMPUTER	Cleveland	(216) 641-6719
PENNSYLVANIA		
ADVANCED MECHANIZATION	Ivyland	(215) 672-9000
COMPUTER ANALYSTS	New Brighton	(412) 846-9323
SUNRISE ELECTRONICS	Chambersburg	(717) 264-8214
TENNESSEE		
COMPUTER WORLD, INC.	Nashville	(615) 255-8330
TEXAS		
ACCESS UNLIMITED	Richardson	(800) 527-3475
COMPUTEX	Webster	(713) 488-8022
QUALITY SOFTWARE	Dallas	(214) 484-2976
TEXAS COMPUTER SYSTEMS	Brady	(915) 577-2931
UTAH		
MICRO MNEMONICS	Sunset	(801) 298-6809
WASHINGTON		
COMPUTER SERVICES	Kennelworth	(509) 582-9759
WISCONSIN		
BYTE SHOP MILWAUKEE	Greenfield	(414) 281-7004
FINAMORES	Marshfield	(715) 384-9610
FOREIGN DEALERS		
AUSTRALIA		
DICK SMITH ELECTRONICS	P.O. Box 321 North Tyde NSW	2113
CANADA		
VALERIE AND ASSOC.	Guelph Ontario	(519) 824-7041
DVR ELECTRONICS	Surrey B.C.	(604) 576-1045
MEXICO		
CIBERMATIC, S.A.	Mexico	(905) 592-3433
COMPUTADORAS Y ASESORAMIENTO	Rio Panuco 14	Mexico 5 D.F.
DOMINICAN REPUBLIC		
RADIO SHACK	Santo Domingo	(809) 565-9121

BUY! SELL! TRADE
COMPUTER & HAM EQUIPMENT

COMPUTER®
TRADER

Mailed 1st class, 1st and 15th of every month
SEND ADS FIVE DAYS BEFORE MAILING DATE

— RATES —

Subscriptions	Ads
One Year\$10.00	Hobby ... 20* Word/Number
Six Months\$6.00	Business .55* Word/Number
Per Copy\$1.00	(Non-Subscriber ... Add 15*
Foreign (Air Mail) \$25.00 yr.	Word/Number)

Send Ads and Subscriptions with remittance to:

COMPUTER TRADER®

Chet Lambert, W4WDR

1704 Sam Drive • Birmingham, AL 35235
(205) 854-0271

For ads count name and address, words and numbers
(zip/area code free)

Please include your name, address, call sign or phone number



Disk Storage: It's No Place to Compromise.

A dependable disk system means everything to the high-performance operation of your computer. At Percom, we know this. And we do something about it.

For example, the connectors on our TFD drive systems are gold plated.

Why? Because solder-plated contacts oxidize, forming an insidious insulation that can cause erratic operation. And then total failure.

Gold-plated connectors are just one way we make better drive systems than the competition.

Now #1 for the Model III

Quality Percom TFD drives provide more features, cost less. Add-on drives start at only \$439.00. Complete First-Drive Systems start at only \$749.95. Features: "Flippy" Capability — Record your

programs and data on either side of a diskette. **Greater Storage Capacity** — Store 180 Kbytes — formatted — on one side of a 40-track TFD drive. Store over twice as much on a TFD 80-track drive.

Think Megabytes — Your TFD drive controller will handle up to four drives. You can access almost 1.5 million bytes of on-line program and data files. **Either Add-in or Add-On** — Your TFD First Drive System can be either internal (add-in) or external (add-on). In either case, you get a complete system including the disk controller, drive, power supplies and disk-operating software.

BASIC-Language DOS — Included on diskette with each First Drive System is Percom's OS-80/III™. This easy-to-use disk-operating system loads into 7 Kbytes of RAM and then frees the drive for other use. With OS-80™ programs, you can have full, read-write interchangeability between Model I and Model III diskettes. **Or Model III TRSDOS*** — TFD 40-track drives work with Tandy's Model III TRSDOS, without modification. For 80-track operation, TRSDOS can be easily modified with diskette patches supplied.

tion. And our double-density version of OS-80™ costs just \$49.95.

Of course you don't **have** to upgrade your Model I for double-density operation to use Percom disk drives. But it's nice to know you can.

Percom TFD drives for the TRS-80* Model I are available in 40-, 77- and 80-track versions, in 1-, 2- and 3-drive configurations. Prices start at \$399.00.

System requirements: Model III TFD drives work with a 16-Kbyte system (min) and Model III BASIC. The initial drive must be a first-drive system. An optional interconnecting cable is available for expanding with external drives #3 and #4. Model I TFD drives work with a 16-Kbyte system (min) equipped with an Expansion Interface, Level II BASIC and DOS software, and an interconnecting cable. Two- and four-drive interconnecting cables are available from Percom.

To order products, or for the name of your authorized Percom retailer, call toll free:

1-800-527-1222



PERCOM DATA COMPANY, INC.
11220 PAGEMILL RD. DALLAS, TX 75243
(214) 340-7081

Still #1 for the Model I

Besides greater storage capacities, more quality control measures and lower prices, all Percom Model I drives are rated for double-density operation.

Plug a DOUBLER™ in your Expansion Interface and enjoy the same double-density disk storage capacity as Model III owners. Included with each DOUBLER is a TRSDOS compatible double-density disk-operating system. DOUBLEZAP programs are available for upgrading other popular DOSs for DOUBLER opera-

Yes... I'd like to know more about the best for my TRS-80 computer. Send me free literature about quality Percom products.

☐ Model I ☐ Model III

Send to
PERCOM DATA COMPANY, Inc., 8-U
11220 Pagemill Rd. Dallas, TX 75243

name _____

street _____

city _____ state _____

zip _____ phone number _____

MAIL TODAY!

*trademark of Percom Data Company, Inc.

*trademark of Tandy Radio Shack Corporation which has no relationship to Percom Data Company.

MD MICRO-DESIGN

ANNOUNCES THE NEW MDX-3

INTERFACE EXPANSION BOARD
INTERFACE EXPANSION BOARD
FOR THE TRS-80
MODEL III COMPUTER

FEATURES:

- Phone Modem
- RS-232 Port
- Floppy Disk Controller
Dual Density
Data Separator
- Silk Screen
- Solder Mask
- User Manual

Also Available TheMDS-1

- Plug in data separator
for the MDX-2
- Fully assembled and tested
- User Manual

STILL AVAILABLE FOR
THE TRS-80 MODEL I

MDX-1 and MDX-2 Boards.

FEATURES:

- Phone Modem
- 2K-4K E PROM Option
- 32K MEMORY Expansion
- Floppy Disk Controller on MDX-2
- Real Time Clock
- Parallel Port
- RS-232 and 20ma Serial Port
- Dual Cassette Line
- On Board Supply
- Silk Screen
- Solder Mask
- User Manual

IN STOCK NOW!

PC Board & Manual

MDX-1	\$64.95
MDX-2	\$74.95
MDX-3	\$74.95
MDS-1	\$21.95

User Manual \$7.95

All Boards Add \$5.00 Shipping
Assembled Boards Available

...Call For Prices

FREE PAMPHLET AVAILABLE
Call or write

MICRO-DESIGN
P.O. Box 748
Manchaca, Texas 78652
512-282-0225

TRS 80 is a Trademark of Tandy Corp.

LETTERS TO THE EDITOR

Hardware Problems

Following up your letter attempting to help me with the TRS-80 reboot problem, I am glad to say that we have found the culprit in the form of a defective IC on the Percom Data Separator board. We put the TRS-80 through all of the tests without it and it came out clean but would not load systems or forms as quickly as with the separator. We installed the suspect board, and in time it crashed, though it would load properly. We replaced the board with a new one, and all seems to be well.

I called Percom about this, and they had never had this happen before, so we are sending it back to them for observation. I had never seen a leaky IC before either, but this thing had a splatter on the board and a stringy line down from the IC to the board underneath, where it had sprotzed all over the board. I don't know how often this happens, but it is a new one on me.

I discussed this with a man who operates a game arcade, keeping things running, and who is also a TRS-80 nut. He said that he fixed his by hardwiring the RS-232 board to the EI. I realize that this would be a touchy job, not for the amateur, but he may have a good idea there. Another idea is brush plating the board edge terminals with gold. I am looking into this, and if it has possibilities I may be able to come up with a kit to do the job. Brush plating is nothing new, but I've never done it with any of the precious metals.

I had been thinking that I might unload this critter, but now that it's working I think I'll hang onto it!

Bob Forman
The Forman Company, Inc.
Box 68
Monmouth, IL 61462

Brush plating the contacts with gold works very well on a blank board (before components have been mounted), with one proviso: you must clean the copper plating extremely thoroughly. Otherwise, the gold will not adhere properly.

However, the voltages and/or currents used in the electroplating process can be extremely destructive to integrated circuit components that are mounted on the board. Therefore, unless the operator is very knowledgeable and takes special precautions, the technique should **not** be used on finished circuit boards.

Learning Assembly Language

Having followed with great interest the columns on assembly language, having bought other books covering the subject, and after maybe a hundred trials at assembly language code, with their inherent hardness and joyful successes, I finally discovered that the main key for going fast and long was the use of a MACRO ASSEMBLER. I had two possibilities: the Microsoft Fortran package and the Disk Editor/Assembler, which in fact are both exactly the same packages, the only difference being that one of them includes a Fortran Compiler.

Unfortunately, after several trials, after many hours spent to discover the usefulness of such a tool, I was finally compelled to give it up according to the absolute hermeticity of this package and the accompanying manual.

My prayer is: would it be possible to review extensively and with examples the use of such a tool? I really wish you will understand how powerful it may be only to have to write and fully debug ONCE those particular routines for outputs to video, to line printer, to move one part of memory from here to there, briefly to be able to

continued on page 10

IS YOUR PRINTER SMARTER THAN YOUR WORD PROCESSOR? THEN MOVE UP TO PROSOFT'S NewScript:



- * Easy-to-use Full Screen Editing
 - * Headings, Page Numbering, Centering
 - * Global Search and Change
 - * Table of Contents, Indexing
 - * All 12 MX-80 fonts + underlining
 - * Italics on GRAFTRAX MX-80
 - * Supports Diablo, Microline, Anadex
 - * Typehead—never loses keystrokes
 - * Form Letters, Big Documents
 - * Double Width, Underlining
 - * Sub-scripts, Super-scripts†
 - * Proportional font right-margin justification on 737, 739, L.P. IV, and now R/S Daisywheel II
 - * 160 pages of excellent documentation includes "EZEDIT", "EZSCRIPT", self-study tutorial, and hundreds of examples
 - * runs under TRSDOS, NEWDOS, NEWDOS/80, LDOS, DOSPLUS
 - * Requires 48K TRS-80 with one disk drive. Specify Model I or Model III
- †Some features work only if your printer has the mechanical capability.

NewScript
Mailing Labels Option
Special: New Script + Labels

\$ 99.95
\$ 29.95
\$115.00


CALL TOLL-FREE FOR ORDERS ONLY:
(800) 824-7888, Operator 422
CALIF: (800) 852-7777, Oper. 422
ALASKA/HAWAII: (800) 824-7919

RPM

RPM measures the rotational speed and variation of your disk drives, and reveals a common cause of unexplained errors. Simple one-key operation, runs under any DOS, interchangeable between Models I and III. Shows current and average speeds, plus fluctuation history. Recovers from severe errors. Documentation explains how to adjust drives. Use RPM monthly for best results.

32-48K Model I or III disk:

\$24.95



FASTER

Monitors your BASIC programs while they run, then displays a simple change (usually one line) that can reduce run-times by as much as 50%. No hardware changes, and handles programs that cannot be compiled! Complex programs benefit the most. See review in Personal Computing, May, 1981.

16-48K Model I or III, tape and disk:

\$29.95

Order from your Software dealer, or from:

PROSOFT

Box 839

North Hollywood, CA 91603

(213) 764-3131

QUICK COMPRESS

Small (276 bytes), fast (processes 800 lines in under 3 seconds) utility removes blanks and remarks from your BASIC programs.

Produces smaller, faster programs, and doesn't alter the original logic.

16-48K Model I or III, tape and disk:

\$19.95

SPECIAL FASTER + QUICK Compress: **\$39.95**

ORDERING INFORMATION: We accept checks, Mastercard, Visa, Money Orders, C.O.D. (under \$50.00, add \$2.00), and even cash. Please, no Purchase Orders. California residents add 6% sales tax. 15% outside North America.

Send for our FREE Catalog

ADDRESS LABELS
FROM AVERY
ONLY


\$15.00

Shipping is even included,
but you must mention Ad #9
when you order

This special price is just to
introduce you to our catalog
of computer accessories and
word processing supplies.
We offer you 25-50% off on
products like 3M-Scotch*
brand diskettes, computer
paper, ribbons, printwheels,
binders, and alot more.

THESE ARE THE BEST ADDRESS LABELS YOU CAN BUY

- TRACTOR FEED
- EXTRA HEAVY
BACKING PREVENTS
SKEWING DURING
PRINTING
- ACCURATELY
REFOLDS AFTER
PRINTING
- SPECIAL
NON-SMEAR
LABEL PAPER
- STANDARD
LABEL SIZE
3½ x 15/16

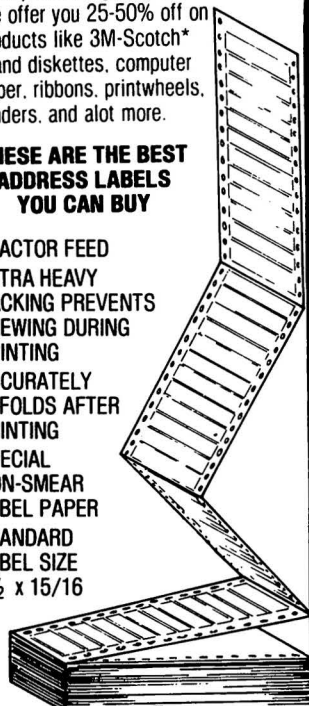

BOX OF
5000 LABELS



TRICOR

3601 S. 9th St.
Kalamazoo, MI 49009
TOLL FREE: (800) 253-4358
In Michigan: (616) 375-7519

- ☐ Please send me _____ box(es)
of address labels at \$15.00 per box.
(Ad #9)
- ☐ I don't need the labels, but please
put me on your catalog mailing list.

Name _____

Company _____

Address _____

City _____

State/Zip _____

*3M Co.

continued from page 8

write an assembly program which
only does what its name says and
then LINK it together with those
external routines without having to
rewrite each time the same things
and without having to change the
ORG pseudo address whenever
you wish to add to your program!

Thank you for your rwaction,
and in the meantime, compliments
for your efforts in the powerful
review which we await each
month since the beginning.

Herve Hanuise
55 Nouveau Monde
B 7400 - Soignies
Belgium

*We will consider this idea for a
future review, but we do not
encourage everyone to get a ma-
cro assembler. These programs are
always difficult to understand and
rarely well enough documented
for the average user. They are really
meant for professional pro-
grammers.*

Complaints

I had no intention of renewing
my subscription to your magazine,
because I think it is overpriced
and fails to live up to your promise
of keeping it "business oriented."
Fortunately, you do publish the
occasional business oriented pro-
gram; therefore I request renewal
of subscription, hoping that you
will improve in the near future.

The following are my com-
plaints with your magazine:

(1) I currently have subscrip-
tions to Byte and 80 Microcom-
puting. Both of these magazines
contain approximately 300 pages
per month, of which approximate-
ly 200 pages contain useful user
oriented information.

(2) Subscriptions to the above
magazines are \$21.00 and \$20.00
per year respectively. Your sub-
scription rate is \$36.00 per year
(for Canadian subscriptions; all

dollars are Canadian currency). Is
this fair?

(3) Your magazine contains on
the average 40 pages per issue, of
which 30 pages contains useful
information. Is this a fair compari-
son?

(4) Your editorials keep telling
us, your readers, that you are
emphasizing your efforts on "busi-
ness applications", yet you insist
on publishing programs like
"Spiro", "Satellite", "Cointoss",
"Gravity", "Engine", "Rustler's
Roundup", "Digital Clock", and
"W4UCH" — all of which are in
the July 1981 issue. I may be
missing something, but I fail to see
how these programs could possib-
ly be used for business applica-
tions. The space that these pro-
grams take up in your magazine
could have been used by a "real"
business-type application. Is this
false advertising?

(5) The format of your magazine
has changed at least five times that
I know of. My first six issues are
reprints. Why not settle down to
one format and leave it at that?

The above comments are things
that have been disturbing me
since I subscribed to your maga-
zine. I'm sorry that this is coming
to you all in one letter, but I felt
that I must let you know. I have
waited in anticipation with each
upcoming issue to receive new
programs and ideas I may apply to
my system, but lately you seem to
be running out of ideas. Can I
help? I have a few business pro-
grams that I have developed which
may help.

I am very impressed with "New
Script". I am currently using
"Script" in applications under a
VM/4341 system at the office
(similar to the VM/370).

I would appreciate a reply to my
above-mentioned complaints, stat-
ing what you intend to do about
keeping to your promise of "busi-
ness" applications. If we want

continued on page 12

Not all Spelling Checkers are the same.

MICROPROOF^{T.M.} stands out!

EASY TO USE: Prepare your text on any Z-80 based micro-computer, using any of a number of popular word processing programs. When you are finished, enter the appropriate command, and MICROPROOF proofreads your document, displaying misspellings and typos on the screen. Then correcting MICROPROOF can display each error separately, requesting you to enter the correct spelling for each. You are also given the option of displaying errors in context or adding words to MICROPROOF's 50,000 word vocabulary. Finally, MICROPROOF corrects your document. All in less than a minute.

SELECT APPROPRIATE RESPONSE:

CORRECT MISPELLED WORD:	ENTER CORRECT WORD
LEAVE WORD "AS IS":	HIT <ENTER> KEY
DISPLAY WORD IN CONTEXT:	?
ADD WORD TO DICTIONARY:	+
EXIT:	!

WORD: (Your error)
RESPONSE:

Correcting MICROPROOF Screen Display

SPEED is the single most important factor in a dictionary program. All dictionary programs will find your potential errors but if the program is too slow, you are not likely to use it. MICROPROOF's speed is outstanding. It can proof-read a several page letter in 20 seconds.

LOW PRICES: Standard MICROPROOF is available for either \$89.50 (TRS-80® Models I or III) or \$149.50 (CP/M®, TRS-80® Model II and all others). The optional correction feature can be added at any time for an additional \$60.00. Optional patches to integrate MICROPROOF into your word processing software can also be added at any time for an additional \$35.00. (Integration patch not needed for Wordstar®.)

MICROPROOF'S FULL 50,000 WORD VOCABULARY saves you time and allows you greater confidence in the lists of potential errors that MICROPROOF identifies. The mini-dictionary programs, with their 10,000 and 20,000 word vocabularies, have many correctly spelled words omitted from their vocabularies. Consequentially, they identify as potential "errors" many words that are actually spelled correctly; five to ten times as many such words as does MICROPROOF. So, when you use MICROPROOF you will have far fewer extra words to evaluate, a major time savings. There will be less need to look up words in order to verify that they are in fact spelled correctly. The extra 30,000 words in MICROPROOF's vocabulary assures you confidence in the error lists that MICROPROOF generates.

There are other proofreading programs available to choose from. Since MICROPROOF became available in December of 1980, a number of companies have announced programs with small dictionaries. It took us almost two years to develop MICROPROOF. During that time we were able to compress our full 50,000 word dictionary into a manageable size (fits on one single density 5¼ inch disk). And we were able to design a proofing program which operates remarkably fast. The chart below illustrates the comparative advantages of MICROPROOF.

ADVANTAGES OF MICROPROOF

	MICROPROOF DICTIONARY SOFTWARE	OTHERS (Mini- Dictionaries)
DICTIONARY SIZE	50,000 Words	20,000 Words
DISK SPACE REQUIRED FOR DICTIONARY	70,000 BYTES (fits easily on one 5¼" disk)	170,000 BYTES
DICTIONARY ENLARGEMENT	VIRTUALLY UNLIMITED	EXTREMELY LIMITED
SPEED—400 Words	20 Seconds	1 to 5 Minutes
SPEED—3,000 Words	1 Minute	2 to 10 Minutes
CORRECTION FEATURE	Optional	Not Available

See your local microcomputer dealer or write to:



CORNUCOPIA SOFTWARE

Post Office Box 5028, Walnut Creek, California 94596 • (415) 893-0633

SAMPLE INC 2 / 3
 RAN. * GAIN FROM SALE OF PUT.
 DPT 4. 88
 MC 231.66
 CR 2.44
 RI 3509
 DPT 4. 45
 MC 472.23
 CR 4.87
 RI 4463

OPTIONS-80
 BOX 471 CONCORD MA 01742

FOR TRS-80* MODELS I & III
 AND APPLE II

ANALYZES OPTION INVESTMENTS

HANDLES CALLS, PUTS, SPREADS, BUYING AND
 SELLING. INCLUDES COMMISSIONS, RISK, COST
 OF MONEY, DIVIDENDS. PRESENTS RESULTS IN
 TABULAR OR GRAPHICAL FORM. HARDCOPY AND
 STORAGE TO DISK. ACCOMPANYING MANUAL A
 COMPLETE AND UNIQUE GUIDE TO OPTION INVEST-
 ING. \$125. M/C AND VISA. MONEY BACK
 GUARANTEE. SEND FOR FREE BROCHURE.

*TRADEMARK TANDY CORP. ®TRADEMARK APPLE COMPUTER

continued from page 10
 games, we can buy game manuals
 that are available in stores. How
 about something new!

Keith D. Greffe
 787 Colonel Curry Drive
 Brockville, Ontario
 Canada K6V 6G5

Please see Howard Gosman's re-
 marks in this month's "Bits and
 Pieces" section for a reply to Mr.
 Greffe's complaints.

 H & E Computronics welcomes
 letters on any subject. If you wish a
 personal reply, please enclose a
 self-addressed, stamped envelope.

— Professional —
REAL ESTATE SOFTWARE
 for APPLE, TRS-80 + PET

- **PROPERTY MANAGEMENT SYSTEM: \$325**
 - Tenant History
 - Late Rent Report
 - Vacancy Report
 - Income Report
 - Auto Late Charge
 - Returned Checks
 - Ownership Files
 - Building Reports
 - Utilities Report
 - Tax Expense Report
 - Prints Checks
 - Prints Receipts
- **PROPERTY LISTINGS/COMPARABLES: \$325**
 - SCREEN BY —
 - Max/Min Price
 - Units/Zone/City
 - Max Price/Income
 - Max Price/Sq Foot
 - Min Cashflow
 - 22 Items/Listing
 - 1000 Listing/Disk
 - Listing Memo Field
- **REAL ESTATE ANALYSIS MODULES: \$40/Module**
 - Home Purchase
 - Income Prop Analysis
 - Property Sales
 - Construction Cost/Profit
 - Tax Deferred Exchange
 - APR Loan Analysis
 - Loan Amortization
 - Depreciation Analysis
- **WORD PROCESSOR — MAGIC WAND: \$285**

Real Estate Software Company
 All Computer Stores Everywhere
 or Order CDD Direct
 Cal Residents add 6% Sales Tax
 (213) 372-9419
 Suite F, Dept. I 1116-8th Street, Manhattan Beach, CA 90266

H & E Computronics also wel-
 comes readers to submit pro-
 grams, articles, or reviews for pub-
 lication. Please address corres-
 pondence to:

The Editor
 H & E Computronics
 50 North Pascack Road
 Spring Valley, New York 10977
 Please submit programs on media
 (cassettes or diskettes). Also
 please indicate the system it was
 prepared on and include any
 necessary instructions. ■

continued from page 6

In replying, the most important
 point I would like to make is that
 this has been a reader-supported
 magazine much more than any
 other publication in the field. As
 you can see from the back issues,
 we have not had very much adver-
 tising until recently. Almost all of
 our income has come from sub-
 scriptions. Other magazines may
 be larger, but they are financed
 through advertising and other
 means rather than through sub-
 scriptions. It obviously costs more
 to print a 300-page magazine than
 either the cover price or the sub-
 scription price. But our magazine is
 growing, and I think that most
 readers feel that our recent format
 changes have been for the good.

Nearly every item that is publish-
 ed in *Computronics* is submitted by
 the readers. We have tried to focus
 upon business applications, and
 we are starting what we hope will
 be a regular series this month on
 practical business programs; but
 the reason that we have not pub-
 lished more business programs is
 that we have not received them. At
 times, Mr. Greffe seems to imply
 that we write the magazine. We do
 not; our readers do, and what we
 publish each month is a represent-
 ative sampling of what our readers
 submit. We do not want to be-
 come a magazine devoted only to
 one area of microcomputing, even
 as important an area as business

applications. That is why we pub-
 lish, each month, features in dif-
 ferent areas of interest. Probably
 nobody will be interested in all
 these areas, but someone will be
 interested in each one of them.
 We have regular features consist-
 ing of reviews of software and hard-
 ware, material for beginners, infor-
 mation about specific computers
 such as the Model III or the Color
 Computer, questions and answers,
 assembly language, BASIC pro-
 grams of all different kinds, and
 even games, fiction, and other fool-
 ishness. When we publish large
 programs that take considerable
 space, they are usually always de-
 voted to serious practical applica-
 tions. Small programs, such as
 "Spiro", may be about anything,
 but I think that most TRS-80 users
 would admire the elegance of pro-
 gramming and the beauty of the
 visual displays created by that
 small example.

All of the material that appears
 in *Computronics* is for the TRS-80
 computers. All programs have been
 tested before publication (in spite
 of the occasional typographical
 errors), and we have tried as much
 as possible to make them compat-
 ible between all of the Models 1, 2,
 and 3. Right now there is an abso-
 lute mess in the microcomputing
 field because of the incompatibili-
 ties between the different compu-
 ters. I would estimate that 90 per
 cent of the programs published in
 other computer magazines would
 not run on the TRS-80 computers
 without extensive modifications
 (unless they were specifically writ-
 ten for a TRS-80). Viewed in this
 perspective, the TRS-80s represent
 an island of stability.

Finally, what I would say not just
 to Mr. Greffe, but to all of our
 readers, is that, if you have pro-
 grams that you have developed
 which you feel carry out useful
 business (or whatever) tasks, by all
 means submit them to our editors
 for consideration. This magazine
 can only publish what it receives. ■

NEW FROM MICRO-SYSTEMS!!!

A complete development package for the machine language programmer.

Novice and experienced programmer alike will recognize the superior features of this excellent package.

The heart of the system is the M-ZAL disk assembler.

This is almost a development package in itself,
including:

- 1. A full screen editor**
- 2. A super fast assembler with optional relocatable code.**
- 3. A linking loader for use with this relocatable code.**

Normal retail price on the M-ZAL package alone is \$149.95.

What **WE** add is our own disassembler that allows you to
compile source code into a disk file,
load and edit it with M-ZAL,
and then re-assemble the code to a command file!

Also you get:

- 1. A full blown DOSPLUS with all utilities.**

AND

- 2. The long-awaited DOSPLUS TECHNICAL MANUAL!**

**We give you the information, the keys to the DOSPLUS
kingdom that you've been wanting.**

We ALSO give you the package to implement them.

All this for only \$199.95.

More programming power than you will find

ANY WHERE ELSE IN THE WORLD!

This package will be available from Micro-Systems and it's
authorized dealers starting in the month of August.

Demand will be high so order yours today!

**MICRO-SYSTEMS
SOFTWARE INC.**

Specializing in the Tandy Line



(305) 983-3390

5846 Funston Street
Hollywood, FL 33023

**CALL TOLL FREE FOR FAST SERVICE
(800) 824-7888, OPERATOR 193
FOR VISA/MASTERCHARGE/C.O.D. ORDERS
California dial (800) 852-7777, Operator 193
Alaska and Hawaii dial (800) 824-7919, Operator 193
TOLL FREE LINES WILL ACCEPT ORDERS ONLY!
For Applications and Technical information, call
(305) 983-3390 or drop us a card.**



Dealers inquiries invited

PROGRAM PREVIEWS

A. A. Wicks

This Month: TYPING TUTOR and MORSE CODE TRAINER

This must be Education Month, as we find ourselves reviewing two instructional type programs — one on Morse Code skill training, and one on touch typing. I can recall some years ago, as a teen-ager, my ambition was to be a ship's radio officer (realized later), and, although I already knew the Morse Code, good typing ability was necessary in order to get the better communications jobs. The two skills then went together, and anyone even today aspiring to copy the code at the higher speeds would be wise to also learn touch typing. Each of the programs to be reviewed will help considerably in either or both fields. On the other hand, if your aspiration is merely to learn to type well, or to improve your keystroking speed, you are thinking wisely, because being able to type program listings quickly, easily, and accurately is very desirable. Also, using your computer for word processing can be a pleasure if you can type well. So let's look at the Typing Tutor first.

The assumption is made with the Typing Tutor program that you will be practicing on your TRS-80 computer. This is not to say that such practice will preclude you from transferring the skill you acquire to a manual or electric typewriter, once learned. There just isn't that much difference between the two keyboards. In fact, the "ENTER" key on the computer is about the same as the carriage return-line space key on an electric typewriter — and almost in the same place in most instances. There are some other very minor differences too; for instance, many typists use the lower case "l" for the figure "one." That is partly an inheritance, as until fairly recently many typewriters did not have the figure 1 on the keyboard. But more modern machines do have all of the figures, and there is no reason not to use the correct figure on the computer of course, and certainly also on the typewriter.

If you should never use the typing abilities that you will undoubtedly learn in using the program for any other purpose than on your computer, you are still far ahead — for your word processing, your correspondence, entering program listings, and a multitude of jobs that can be literally "at your fingertips." And let us assume that you never really develop any great speed (accuracy is more important than speed, anyway), then you will save many, many hours of checking your work for errors, because they just won't be there! Convinced that you should learn touch typing now? Then consider the following comments regarding this program.

Typing Tutor is produced by Microsoft Consumer Products, and was written by Dick Ainsworth and Al Baker, and coded by Leah O'Connor — all members of The Image Producers, Inc., Northbrook, Illinois. The program starts out by permitting you a choice of learning Letters, Numbers and Symbols. The obvious starting point should be Letters, but if you *know* the keyboard and have some typing ability already, you may wish to concentrate on one of the other choices. After making your decision, the program prompts further for a reply to Typing Tutor or Practice Paragraph. Continuing, beginners start with the first choice, which will teach you the key positions, correct finger positions, and practice on the letters.

As you gain speed and accuracy with this choice, an evaluation is occurring, based upon your errors and response time, and as you progress more new letters are automatically added to your assignment on the video display. For this mode, a diagram of the keyboard is available in the manual to guide you to the correct finger positions and use. Reference to this chart may be made at any time, of course, but for beginners it is mandatory, and should be checked to insure correct finger positions. But don't look at the keys while you are typing! This is urgently mentioned in the manual, and personally endorsed. Better to make some errors, than to become dependent upon looking at your fingers and the keys while you type.

Practice letters will appear on the screen, and you will respond by typing the letter indicated. Your progress will be rapid, be assured. Recalling my own learning experience at touch typing, this program appears to be better than full classroom instruction, with the added advantage of progressing at your own pace — when you feel like practicing (that could be a drawback, unfortunately). When your reaction time to any letter is equivalent to 20 words per minute (wpm), that letter is added to a "fast" list of letters held in computer memory, and a new key is added. Microsoft calls this TRM, for Time Response Monitoring. The scan on this function occurs 20 times per second, thus it also monitors the time it takes for you to look at the keys if you decide to do a little cheating on yourself!

New keys are added in a sequence that emphasizes single-finger multiple-key use. That is, for instance, the index finger of the right hand is used for J, M, U, Y, H, and N (plus some figures and symbols), and the instruction introduces new keys in this type of sequence.

When you have completed ten lessons, Typing

An
innovative
word
processing
system
for
TRS-80*
MOD I
&
MOD III



©1980
by
David
Welsh

It is time to put your
word processing program
away and use a
Word Processing System

MOD I - \$125
MOD III - \$175

*Requires 2 drives for
conversion only.

*Lazy Writer is the product of ABC Sales

LAZY WRITER Takes on Scripsit® by Radio Shack® and Electric Pencil®

Has all the things that other word processing programs should have. Easy to use, written all in machine code. / It permits the inserting and deleting by characters, words, sentences, and paragraphs / Page scrolling up and down / Search ahead of the cursor or behind the cursor for any character / The cursor can be moved up, down, left and right / You can seek top of file and bottom of file / Block move of text, block delete of text / Search and replace or search delete / Unlimited insert (to the limit of your machines memory) / Permits use with lower case /

Has things that other programs should have, but don't. Upper and lower case output to your printer (if your printer accepts lower case) without having your computer modified. ON UPPER CASE ONLY MACHINES: This program marks the capital letters so you can see which letters are CAPITALS and which are not. / Will change all upper characters text to lower case or all lower case to upper. A SINGLE COMMAND / Will capitalize the first letter of all sentences and all proper noun's. WITH A SINGLE COMMAND / LOADS ANY ELECTRIC PENCIL FILE / ASCII SAVED FILES. EDTASM FILES or BASIC PROGRAMS SAVED ASCII / Permits installing special control characters in your text for your printers special features, like double wide or condensed print / Definable screen length and definable print length to 255 characters wide / Screen editing that is not final fill your command. This means that you can edit your file on the screen and if you don't like how it reads you can cancel and leave it the way it was / You can append files (which means that you can put one file to the end of another file) / No lost characters at the end of the line, even for the fastest typist / A directory of all your files is available to the user without leaving the program / Saving programs to disk easy enough for the non-computer user / To save memory, not all the program modules are in memory at one time but are called from the disk as needed / You can set tab positions like on a typewriter / 10 CUSTOM COMMAND KEYS for the experienced user there is a command file that permits many special functions that are all user defined (not enough space for better explanation in ad, send for complete overview) / Program has HELP file that is a short review of the commands that are available /

Standard Printer Module. This printer module is provided for the user as a standard feature. Optional special printer routines for custom printer will be available in the near future. In this original release, it has the following printer drivers and will support the following printing devices: RS232, TRS232 and PARALLEL printer ports. You have the following format commands: Justifies Text, Centers Text, Centers Title, Line Spacing, Line Length from 3-255

characters and Set Margins / Also send any ASCII code to any printer from the text / Save formatted text to the disk for spooling later / Information for customer to load his own special printer driver / Printing can be stopped and started by the user at any time and then restarted where you left off / You can print entire file or just print to bottom of the page /

Communication Package. RS232 COMMUNICATION TERMINAL PROGRAM permits you to communicate with other computers. Transfer files from one machine to another. Permits dumping memory across the phone lines. Receive files from other TRS-80's and "Shake Hands" with larger computers. This is the complete system called LAZY WRITER. There is no package written for the TRS-80* that is as comprehensive. This package is available for the TRS-80* MOD I, 32K or larger with at least a single disk drive. List price is from

\$125.00

SSM SOFT SECTOR MARKETING,
INCORPORATED

VISA*

Phone Orders
800-521-6504



Questions & Michigan Orders
(313) 425-4020

NEW FEATURES in Lazy Writer **"The People Request, and David Welsh Delivers"**

The system permits embedding ASCII commands into the text of the program. NOW you can do SUPERSCRIPT and SUBSCRIPT (if your printer can handle it). Underlining and boldface, printing of a single word in a paragraph, is now possible, at no extra cost.

A key that remembers the cursor position.

User definable special character. For use with printers that have printable characters that the TRS-80 keyboard does not normally support

Margin control from within text. This means that you can change the margins of your printed text without stopping the printer routine and changing it.

Page offset with odd/even headers & footers. This means that you can print one page offset to the left of center and the next page offset to the right. This is very nice when you are writing a book.

Printing chaining feature. This permits having more than one file on disk and create one printed letter, contract, or book without having to reset the printer commands.

Mandatory space command. This is necessary when you are writing letters or papers that have certain words that are not to be broken-up. eg. John P. Andhouser. This name can be made to be unbreakable to justify routines in the program.

Disk catalog. Now you can load your disk directory into memory and create a file of this information.

Reverse Indents or known as Hanging Indents.

Tutor will provide a progress report, typically:

YOUR ACCURACY IS 80 PERCENT AT 27 WORDS PER MINUTE.

This reflects your average accuracy and speed for the ten lessons.

Progressing further, the program now allows you to practice by changing response time requirements, or take practice paragraphs. If you are a touch typist already, you may wish to start with practice paragraphs. At any time that you select Practice Paragraph, the paragraph appears on several lines with space between, and your keyed input appears below each line. The groups that are provided in the paragraph are randomly selected, and include a good smattering of programming-type words, such as "DEFSTR." This is going to speed up your keystroking when you encounter these words in a program listing that you may wish to type. At your request, some paragraphs will contain a mixture of numbers and words; the former can be very tricky when spotted among words.

It is most interesting to have your practice paragraph response analyzed, and may turn out to be encouraging or discouraging. In any event, your progress (or lack of it) will be evident. The analysis will state, for example, "YOU MISSED 3 KEYSTROKES ON THE FOLLOWING LETTERS. K R P. YOU WERE SLOWER ON THESE KEYS. K P. YOUR ACCURACY IS 97 PERCENT. YOUR RATE IS 45 WORDS PER MINUTE."

On a test in a school environment, such a detailed report might not be available from the instructor until the next day, or next week. The advantages of having such an instant report are quite evident.

Experienced typists are surprised when they try some of the tests, and I was, too. I did quite well on the practice paragraphs, but when I went back to basics, and tried typing the four-letter mixed letter groups, my speed and accuracy dropped radically. On consideration, however, this should be expected — a typist will be used to typing standard dictionary words, and the keystroking of some of these such as "the," "and," etc. will be almost automatic. But when reverting to the mixed letters, the thinking process must be reformed — just as it would be if you were typing a foreign language with which you were not familiar. Therefore, it is very desirable that even good typists should practice on these groups, because in typing program material you are really working with a coded language.

The manual that accompanies the program was written by Dottie Hall, and is a first-class five by seven inch document, comprising 20 pages of typeset information. The typeface is very clear and open, and Bold headings are used for sectional division. The writing style is instructional in form, wastes no words, but gets the information across in an explicit and lucid

manner. It is a credit to the writing that the whole program function can be visualized without even running the program. The drawing of the keyboard is only one-inch high and three-inches wide. A beginner will make frequent references to it, and I would have liked to have seen it as a full-page side-viewing illustration for their benefit. For those of programming bent, a section of the manual called, "What's Inside," discusses the program, and encourages the reader to look at the listing of the program to understand how it is constructed. Even though small by some standards, this manual gets a 10 rating (10 being best), on all points of evaluation. The manual, together with the program cassette is packaged in an attractive lithographed box sealed in plastic-wrap.

The only unsatisfactory aspect of this program is that it does not support lower case. The screen presentations and all of the user's inputs are in upper case. If the lower case option had been provided, it would have increased the value of the learning aspect by exercising the ability to use the shift key for more than typing special characters.

Will the program serve the purpose for which it is intended? Indeed it will, if, as with all instruction, you dedicate time to following the instruction. One half-hour a day will surely have you typing accurately and at a comfortable speed within a few weeks. But practice must be consistent. The cost of the program is very modest too, and this is one program that may be used by many members of a family, for school or business training. If only such a method had been available when I was learning to type! There would have been none of Miss Peacock's droning cadence, "A S D F J K L ;" — but then I wouldn't have had the chance to swap mash notes with Ivy-Marie, either.

TYPING TUTOR - Microsoft Consumer Products. Model I 16K Level II BASIC. Available through H & E Computronics, Inc. - Cassette or Disk (distributed on cassette) - \$14.95

* * * * *

In this day of satellite communications, computer communications, facsimile, etc., does anyone wish to learn the Morse Code? Is the Morse Code even used to any extent? The same answer applies to both questions: a resolute "Yes!" The code may appear to be a primitive method of electronic communication compared to other exotic methods, but its very primitiveness is what creates its value. When the high technology methods fail, when conditions do not permit voice use, code communication can continue to be used, utilizing extremely low power (how about halfway across the world with only one watt?). When all else fails in a disaster situation, radio code

DISK III

100% Compatible

Model III Disks

Complete Business System includes:
48K TRS-80™ Model III, Disk III™ 2 Drive System, TRSDOS and Manual.



\$1882

DISK III Single drive assy¹ \$599.00
DISK III Two drive assy 864.00
DISK III Assy w/out drives 435.00
TRSDOS™ & Manual 21.90
External drives (3 & 4) 299.00

DISK III single drive assembly includes: one 40 track 5¼" double density drive, power supply, controller, mounting hardware, and applicable cables.

IMMEDIATE DELIVERY - COMPARE AND SAVE

WINCHESTER HARD DISK MODEL III

Integral Winchester Business system includes:
48K Model III, LDOS Disk III™, 6.3 MEG HARD DISK SYSTEM.

\$4995

\$2895

6.3 MEGABYTE WINCHESTER HARD DISK SUBSYSTEM
With chassis, PS, LDOS™.
9.5 MEG \$3395.00

MOD III Options:

9.5 MEG HD (internal)	add \$500.00
80 tk 1 side floppy	add \$120.00
80 tk 2 side floppy	add \$240.00

Winchester Subsystem Options:

2 x 6.3 Meg drives	4495.00
2 x 9.5 Meg drives	5495.00

Peripherals

Epson MX-80	500.00
Epson MX-80 FT	615.00
Epson MX-100	800.00
Centronics 739	700.00
Starwriter 25 (P)	1395.00
RS-232	95.00
Lexicon modem	105.00

MODEL I/III

EXTERNAL DRIVE W/ PS & ENC

\$275

Fully Compatible
 120 day warranty
 Easy installation
 80 tk or 2 sided \$419.00
 80 tk & 2 sided 549.00

OTHER PRODUCTS

SUPERBRAIN 64K	2990.00
PARALLEL PORT — SUPERBRAIN	99.95
DISK & MYSTERIES	22.50
BASIC & MYSTERIES	29.95
NEC Ribbons (min. 6)	5.95
Epson Ribbons	12.50

NEW—

LDOS Operating System 149.00

COMING SOON!!

Internal MODEM for MOD III

IF YOU DON'T SEE IT ADVERTISED CALL US AND ASK FOR IT.
 PUBLISHED PRICES REFLECT CASH DISCOUNT.
 ALL PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE.
 TRS-80 and TRSDOS are trademarks of Tandy Corp.
 DISK III is a trademark of VR Data Corp. Dealership available.

Phone toll free 800-345-8102

• in PA 215-461-5300 Cable address "VRDATA" • TELEX

VR Data

VR Data Corporation
777 Henderson Boulevard • Folcroft, PA 19032



communications can be maintained.

But who wishes to learn it, anyway? Well, probably the largest group are prospective amateur radio operators (hams), because it is a Federal government examination requirement in order to obtain a license to operate a radio transmitter on the amateur frequency assignments. Potentially, these license holders are the disaster communicators, when needed.

The Morse Code Trainer program was written by Chet Wilson, who must have given considerable thought to the best method of having the computer act in the role of instructor.

Before using this program, you must first know the Morse code equivalent of each letter, figure and punctuation symbol. In fact, you must have some capability at recognizing these characters at almost five words per minute (wpm), because that is the lowest speed at which practice starts. By chance, this is also the speed of the lowest level Federal Communications Commission examination — but being able to copy exactly that speed would probably not suffice, when you consider such factors as nervousness and distractions. As with all dexterous skills, a little upper leeway is almost always needed. Nevertheless, this starting speed is valuable as a beginning point for anyone.

The arrangement for using the program requires that the plug going to the AUX jack of the tape recorder be removed and inserted into the input jack of an amplifier. The Radio Shack Mini-amplifier is recommended in the manual and is a good choice. The amplifier has all the volume necessary to fill a large room. An alternate way is also described allowing you to use the cassette recorder amplifier, but this is a little more complicated. Once these preliminaries are made, the code characters will be heard as they are produced by the program and computer.

You have several choices for practice. Your initial choice will be the speed at which you wish to have the code sent. You may select within a range of 5 to 15 wpm. Next, you choose Low or High pitch. This is a personal choice. Although I did not bother to check the exact frequency of these tones by instrument, Low appears to be about 1000 Hz and High about 2000 Hz. The next two choices determine whether you use Practice Mode or Test Mode. You will use both, but will probably start with Practice, because that is your reason for using the program. (If you do not make a choice within about one minute, a tone sounds to remind you to continue.) In this mode, you may further select the type of practice you desire: Random Numbers, Random Punctuation, Random Letters, Random Sentences — or, Your Own Message.

Let's assume you have selected Random Letters. You merely type "2" (the Menu Choice number), and

the practice starts. That is one thing that is very convenient with this program — you never need to press "ENTER" (except for Your Own Message, but then only if it is less than 54 characters). Just press the numeral of your choice and the action commences. To continue, the random letters of five groups of five letters each are displayed, and an arrow points to each letter as it is sent in Morse. As the character is sent, the letter disappears. The random sentences, other choices, and your own sentences are all operated in this way.

The Test Mode allows the same types of choice, but the random selections are not shown on the video display. Instead, the code is sent, and you must write it down on a piece of paper (or type it, if you want touch-typing practice!). Then, upon completion you are requested to type on the computer keyboard what you have copied. The computer then automatically scores your effort. At this point — and this is a very nice feature — the correct message appears, with your answer alongside. The correct message is sent by the computer, once again with the arrow pointing to each letter as it is sent. If you copy the message or letters with 100% accuracy, you are rewarded with a zooming low to high tone, and the word, "PERFECT!"

The program is available on cassette tape or disk. The first tape that I received was defective. It would load with every indication of being a "good load," flashing asterisk and a solid sound on the speaker. But then, the input just stopped, short of completion — resulting in CLOAD hangup, even though the recorder continued to run. The program is on both sides of the tape; both were the same. A note to DYNACOMP brought a prompt reply, another cassette, and a disk copy. This cassette loaded without any problems whatsoever. The disk program also loaded properly. DYNACOMP assures me that all tapes are checked for correct loading before they are placed in stock. This being the case, the first tape could have been affected in transit.

Next problem. The program begins by displaying a logo, and the word "HELLO." The arrow points, and the code comes out of the speaker as "HE AA AA O." Was my code getting rusty, or was this some vagary of the displayed word? I continued to check the program, and was disturbed to note that whenever the letter "L" was used it was sent in Morse as AA. (Actually not as just shown, because the double-A was sent as a character of its own, without space between the A's — which is the Morse code character for German A-umlaut.) It was necessary then to study the BASIC listing of the program to determine how the characters were being created, in order to discover a GOSUB that wasn't there. Although it is usually not a practice in presenting these reviews to "get inside" a program, I feel that for those who may have already purchased this program and may have the same release, the


'.. this is not only a worthwhile book but a great book. My advice is to get it and USE it!' - William Barden Jr.

OTHER MYSTERIES



132 pages
\$22.50

Now available at
selected DALTON
bookstores

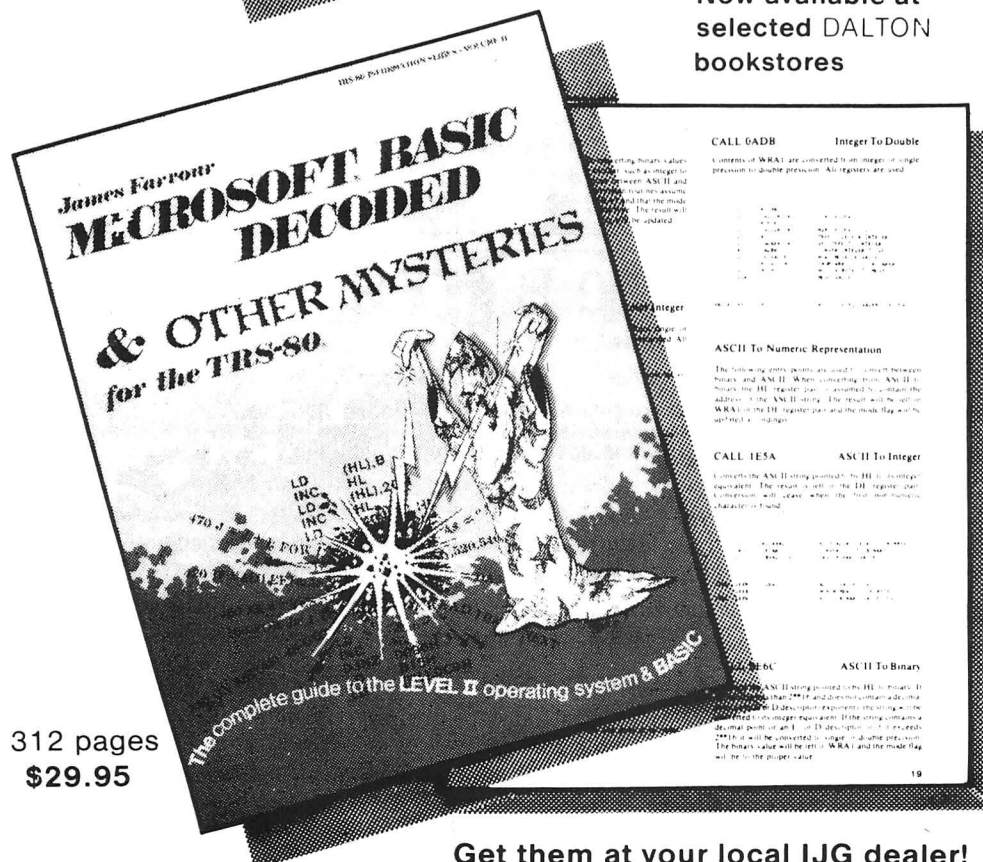

312 pages
\$29.95

Get them at your local IJG dealer!

'It has twelve thousand one-liners in it, and every one is great!'
- Dennis Kitsz.

Phone orders (714) 946-5805

TRS-80 Disk and Other Mysteries is the definitive fixit book for disk users. Written by Harvard Pennington it has more than 130 pages of easy to read, entertaining and immensely useful information - find out how to recover disk files, the layout of information on the disk, memory maps, problem solutions . . . the list goes on!

Many readers have saved days of work by recovering files that had been unreadable. Now in its fourth updated printing, TRS-80 Disk and Other Mysteries has been getting rave reviews in several magazines. Yours for only \$22.50 (plus \$1.50 shipping, CA residents please add \$1.35 sales tax).

Microsoft BASIC Decoded and Other Mysteries is the complete guide to your Level II ROMs. With over seven thousand lines of comments and 6 additional chapters packed with information, this is easily the biggest, and best, book about the Level II ROMs available.

Exploit the full power of Microsoft BASIC, with the aid of more than 300 pages of tested examples, understandable explanations and detailed comments. Now available in a revised second printing, only \$29.95 (plus \$2.00 shipping, CA residents add \$1.80 sales tax).

IJG Computer Services,
1260 West Foothill Blvd.,
Upland, CA 91786

Please send me a copy of TRS-80 Disk and Other Mysteries for \$22.50 plus \$1.50 shipping. ☐

Please send me a copy of Microsoft BASIC Decoded and Other Mysteries for \$29.95 plus \$2.00 shipping. ☐

Please send me a copy of The Custom TRS-80 and Other Mysteries for \$29.95 plus \$2.00 shipping. ☐

OK, send me all three IJG books for \$82.40 plus \$5.00 shipping. ☐

Overseas add \$8.00 per book airmail.

Name

Address

City

State Zip

Charge my:

☐ MasterCard Interbank Code

☐ Visa Expiration Date

Card No.

☐ Check enclosed for

☐ Ship COD (\$2.00 extra)

Signature

following should be noted. In Line 1500 the last GOSUB should read: GOSUB 1850. (Not 8800.) This error was present on both the cassette and disk versions that I received, and on both copies on each. It is small but significant errors such as this that give me concern in programs offered to users, and is certainly not the first time that I have found this type of error in commercial products. This particular item could be a real problem to a naive beginner in the code, and might result in a later mental block with the letter "L." Perhaps DYNACOMP should issue an Errata sheet with each copy.

The code as sent is quite satisfactory at speeds between 5 and 10 wpm. Actually, there is nothing wrong between 10 and 15 as far as the form of the characters is concerned. Consider the following, however.

The transmission speed of code may be increased in one or both of two ways. The actual length of the dots and dashes may be shortened (not much to work on with the dots), and/or the spacing between dots, dashes and word groups may be shortened. From a technical aspect, all character ratios should remain the same. It is obvious though, that for learning purposes it would be nice to send characters at, say, a 10 wpm "rate," but spaced so that the actual transmission speed was only four or five wpm. Then, as proficiency grew, just shorten up the spacing, and lo! It sounds the same but now we're copying 10 wpm. What this is all leading to, is to say that the program author has taken this commendable approach, on all speeds above, it seems, about 8 wpm. Therefore, at 15 wpm his characters appear to be at about a 20 or 22 wpm "rate."

Unfortunately, the TRS-80 does not react well to this at speeds of about 11 to 15 wpm. The dots are clipped, making them seem almost as just short audio "clicks," and the dashes sound truncated. If the "make-break" aspects of the program were operating an external keying relay or code oscillator, this problem would possibly be resolved.

Actual code transmission times are reasonably accurate. At 5 wpm, five five-letter groups were sent in 51 seconds. Sixty seconds would be exactly 5 wpm, but these were random letters. The test word "paris" would probably indicate nearly 100% accuracy. Similarly, at 10 wpm, the time was 57 seconds. One cannot quarrel with these accuracies.

The two and one-half pages of typewritten instruction are quite adequate, the only discrepancy mentions the maximum code speed for the program as 11 wpm, whereas up to 15 wpm is obtainable.

My overall evaluation of this program is that it would be helpful to anyone working alone in trying to get their code speed up to about 11 or 12 wpm. Because of the previously mentioned deficiency, I feel it might handicap one beyond that. The scope of practice is excellent, and all that anyone should need. The cost of the program is very reasonable, being little more than the cost of a couple of code practice training cassettes, which are soon memorized. As with Typing Tutor, you can work at your own pace, and study as time and interest permits. If your needs fit this profile, you will not be disappointed in this program.

Morse Code Trainer - DYNACOMP, Inc., Rochester, N.Y. TRS-80 Model I Level II and Model III. 16K Cassette, 32K Disk

5,000,000/20,000,000 BYTES

From Micro Mainframe

10 MEGABYTE HARD DISK DRIVES, with REMOVABLE Cartridges, For Models I / II / III (\$5,995/\$8990).

SERIES III H. Model III with 5,000,000 byte hard disk drive(s) (\$6,995/\$9,095) or add to your Model I/III (\$3,795).

SERIES III F. Model III with a controller board (available separately) and operating system which allows you to start with, or move up to, dual-headed or eight-inch floppys.

From AT-80

GL80 — \$149 — Radio Shack General Ledger 1.1 with over 30 added features; including a general ledger, classified balance sheet, check register and options to use an "automatic" account number or re-do an entry or document.

AR80 — \$199 — Radio Shack Accounts Receivable 1.2 with automatic posting of standard monthly amounts.

GL/M1 — \$49 — Convert your General Ledger 1.1 to GL80. Typical user comment: "Takes half as much time."

AR/M1 — \$49 — Convert your Accounts Receivable 1.2 to AR80. Typical user comment: "Saves hours."

GL/M1 and AR/M1 require proof of purchase of the original programs, or, send a disk copy of the original programs for conversion at no additional charge. Documentation (apply to purchase) — \$5.00 each.

FTDEM080 — \$12 — Displays and Executes the NEWDOS/80 Appendix A programs/keyboard entries. Requires 32K.

NEWDOS/80 — \$135

LDOS — \$135

EPSON

MX-70/80/FT — \$Call

FRICTION KIT — \$49

AT-80 3827 Dismount Dallas, Texas 75211 (214) 339-0498

Spelling Errors? Does your TRS-80* wordprocessor need help?

PROOF READER^{T.M.}

CAN SPELL rendezvous AND mnemonic AND OVER 38,000 OTHER WORDS

Now let TRS-80 and Proofreader by Aspen Software Company check your Scripsit*, Electric Pencil, or other documents for spelling and typographical errors. It has all the features needed to meet your proofreading requirements.

- Checks every single word of even your biggest document in under 5 minutes.
- The 38,000 word dictionary is one of the largest available.
- Dictionary can be easily extended to add more words such as technical terms or names.
- All unknown words are listed on the screen and can be saved on a file for printing.
- Works with almost any TRS-80 wordprocessor including Scripsit and Electric Pencil.
- Comes with complete and easy to understand User's Manual.
- Proof-EditTM, optional interactive corrections feature for Model I/III

GRAMMATIK^{T.M.}

BEYOND SPELLING CHECKING

A spelling checker may not be enough! This paragraph contains a number of common errors (indicated by underlining) that will be discovered by Grammatik that would seldom ever be caught by a spelling checker. FOR example, Grammatik checks for improper word usage as identified by a number of writing style manuals (such as "seldom ever"). Grammatik will check for the presence of certain words such as jargon or sexist terms. it also checks for consistant punctuation, cap-

italizAtion, balanced quotation marks and parentheses, and and repeated words. In addition, it will produce a list of all unique words found in your document with the number of times each was used. Grammatik comes with a dictionary of commonly misused phrases and a dictionary of sexist terms. It also includes a complete set of utilities to build, sort, and merge phrase and jargon dictionaries of your own. Works with Scripsit, Electric Pencil, and other standard TRSDOS text files.

	Proofreader	Proof-Edit	Grammatik
MODEL I Requires 32K RAM, 1 disk drive, TRSDOS or NEWDOS..	\$54.00	\$30.00	\$49.00
MODEL II Requires 64K RAM, 1 disk drive, TRSDOS 2.0 (can check 1.2 files using XFERSYS).....	\$109.00	N/A	\$99.00
MODEL III Requires 32K RAM, 1 disk drive, TRSDOS.....	\$64.00	\$30.00	\$59.00
Manual only, specify model (refundable).....	\$3.00	\$5.00	\$5.00

Aspen Software programs are professional quality software tools developed for the TRS-80 by a Ph.D. in Computer Science. Other tools include:

— SOFT-SCREENTM, a powerful, state of the art full screen text editor. Over a year in development, Soft-Screen is compatible with all TRS-80 programming languages, including BASIC, FORTRAN, MACRO, Ratfor, and COBOL. Easy to use, comes with tutorial and full documentation.

— RATFOR, a structured language preprocessor for Fortran developed at Bell Labs. Aspen Software Ratfor provides a number of extensions, including

"case" and "string". Includes complete manual with all the information needed to learn and write Ratfor programs. Requires FORTRAN.

— PP-RATFOR, a pretty printer for use with Aspen Software Ratfor. Automatically formats and indents Ratfor source programs.

	Ratfor	PP-Ratfor	Both	Soft-Screer.
MODEL I	\$49.00	\$30.00	\$74.00	\$69.00
MODEL II	\$99.00	\$49.00	\$139.00	\$99.00
MODEL III	\$59.00	\$34.00	\$84.00	\$75.00
Manual only(refundable)			\$12.00	\$15.00

MODEL I, III require 48K, 2 drives, TRSDOS
MODEL II requires 64K, 1 drive, TRSDOS 2.0
Please call or write for details about our wordprocessor.

ASPEN SOFTWARE COMPANY^{T.M.}

Orders sent postpaid by first class mail.
Terms: Cash, check, money order, VISA, or Master Card. NM residents add 4% tax.
When ordering, specify model, memory size, number of drives, and operating system.



Formerly
SOFT-TOOLS

Dealer inquiries invited

ASPEN SOFTWARE
P. O. Box 339
Dept. H
Tijeras, NM 87059
(505) 281-1634

* Trademark of Tandy Corporation Proofreader, Grammatik, and Soft-Screen are trademarks of Aspen Software.

GRAFF-PAC: A PROGRAM FOR STRING PACKING

Neil Fishman and Jeff Platzman

GRAFF-PAC is a program designed primarily for string packing, but it can be used for other purposes, as will be discussed later in the article.

First, it is necessary to know that all of the BASIC keywords are stored as one number instead of the separate words (a list of keywords and their decimal equivalents are shown in figure 2).

What the program does is change a value from what it is now to what you want it to be. For example, the numerical value for the command "PRINT" is 178. In a program, if we wanted to change it to the command "DATA", we would find where it is in the memory, and change the number from 178 for "PRINT" to 136 for "DATA". Not only would this change it to look like "DATA", but the program would also treat it as a "DATA" command (which it now is).

GRAFF-PAC makes this process much simpler and faster. GRAFF-PAC displays a program eight bytes at a time, and permits the user to modify any memory address within the program with a constant display of what is going on.

The first thing that the program does is to check if you have a disk drive hooked up to the computer. If you do, you will get a question of which DOS you are using. After answering this question, the computer will display the first byte of the program. Now hit "X" and start writing your own program. For the first time you use the program, type in the short program that is listed:

```
10 CLS:PRINT"////////////////"
20 REM THIS IS A TEST PROGRAM
30 END
```

After having typed this in, type "GOTO 20000". This will automatically put you into the GRAFF-PAC program.

The first thing you will see will be this:

26810	206	UNPRINTABLE-
26811	104	H
26812	10	UNPRINTABLE-
26813	0	UNPRINTABLE-
26814	132	.
26815	58	:
26816	178	.
26817	34	""

NOTE : The periods represent the graphic character formed by printing the CHR\$ code of the number in the center column.

The number in the first column varies depending on whether or not you have a disk drive, and if you do, which DOS is being used.

The numbers in the first column are the memory locations where the program is stored. The second column consists of the numerical values that are stored, and the third column is the CHR\$ code, (If the character is a video control character such as CHR\$(23) or CHR\$(28), it will be shown as -UNPRINTABLE-. The same is also true for space compression codes such as CHR\$(225).) If, in the third column, you see a graphic character, and it was not "packed" into a string, it is a BASIC command that corresponds with the numerical value in figure 2.

To "pack" a string, you must first set up a "dummy" string in your program, using the same amount of "/"s as the amount of graphics characters you wish to "pack" in the string. For example if you wanted to "pack" five CHR\$(###) into a string, the "dummy" string must contain five slashes.

To actually change the "dummy" string, first move the arrow next to the line you wish to modify. Then type "M" and proceed to enter the number in three digit form. After this is done, an "M" will appear to the left of the arrow, showing that you are in the modification mode. If the number you wish to enter contains less than three digits, it must be preceded by the appropriate number of zeros to make it a three digit number. Any time during the modification mode, if you make a mistake, unless on the third digit, type "X" and you will leave the modification mode without having changed anything (if you hit the "X" at any other time, you will end the GRAFF-PAC program and return to the BASIC command mode). Should you make a mistake on the third digit, you must then re-modify that line.

After a string has been "packed", DO NOT EDIT the line that it is contained in. The reason for this is that once the line is edited, the words which are now representing graphics characters will be printed themselves instead of the graphics characters during a run (the words will always be printed during a listing of the program). For example, before line 10 is edited, a CHR\$(191) will be printed, but after the line is edited, "USING" will be printed. If you must do any editing, use GRAFF-PAC to find the error and change it that way.

```
10 PRINT"USING"
```

While using GRAFF-PAC on a tape based system, loading another program on while GRAFF-PAC is in the

Color computer owners, 32K PLUS DISKS* \$298.⁰⁰

Yes, that's right - for as little as \$298.00 you can add 32K of dynamic RAM, and a disk interface, to your TRS-80 Color Computer! If you just want the extra memory it's only \$199.00, and you can add the disk interface later for \$99.00.

Just plug the *Color Computer Interface (CCI)*, from Exatron, into your expansion socket and "Hey Presto!" - an extra 32K of memory. No modifications are needed to your computer, so you don't void your Radio Shack warranty, and Exatron give both a 30 day money-back guarantee and full 1 year repair warranty on their interface.

The CCI also contains a 2K machine-language monitor, with which you can examine (and change) memory, set break-points, set memory to a constant and block-move memory.

So what about the *CCI Disk Card*? Well as we said it's only an extra \$99.00, but you'll probably want Exatron's *CCDOS* which is only \$29.95 - unless you want to write your own operating system. The *CCI Disk*

Card uses normal TRS-80 Model I type disk drives, and *CCDOS* will even load Model I TRSDOS disks into your color computer - so you can adapt existing TRS-80 BASIC programs.

As a further plus, with the optional *ROM Backup* adaptor, you can dump game cartridges to cassette or disk. Once the ROM cartridge is on cassette, or disk, you can reload, examine and modify the software. The *ROM Backup* adaptor is only \$19.95.

For more information, or to place an order, phone Exatron on their Hot Line 800-538 8559 (inside California 408-737 7111), or clip the coupon.



excellence in electronics

exatron

DEALER ENQUIRIES INVITED

Exatron,
181 Commercial Street,
Sunnyvale, CA 94086



- ☐ Please send a 32K Color Computer Interface for \$199.00
- ☐ Please send a CCI Disk Card for \$99.00
- ☐ Please include CCDOS and manual for \$29.95
- ☐ Also include a ROM Backup adaptor for \$19.95

Please add \$5.00 for shipping to all orders, and 6 percent sales tax in California.

Name

Address

City

State Zip

Charge my:

☐ MasterCard Interbank Code

☐ Visa Expiration Date

Card

☐ Check enclosed for

☐ Ship COD (\$2.00 extra)

Signature

memory is impossible. The program, or at least the graphics, must be created using any line under 20000. While using a disk system, it is possible to "MERGE" a program with GRAFF-PAC.

GRAFF-PAC saves space while creating complicated graphic displays. This gives a programmer more room for detail in a program instead of using three times more memory for slower CHR\$ functions.

```

20000 REM <<<< GRAFFPAC >>>>
20010 REM      BY NEIL FISHMAN & JEFF PLATZMAN
                62 PARKER BLVD.
                MONSEY, NEW YORK 10952
20020 CLEAR 75: IF PEEK(16396)=201 A=17129 :GOTO 20050
20030 CLS: INPUT"TRS-DOS      (1)
NEWDOS      (2)
NEWDOS/80   (3)
WHICH DOS ARE YOU WORKING IN";A: IF A<1 OR A>3 GOTO 20030
20040 IF A=1 THEN A=27172 ELSE IF A=2 A=26810
ELSE IF A=3 A=27206
20050 B=A: G=0: H=0: L=0
20060 CLS: PRINT @ 512, STRING$(64,140);:
PRINT @ 576," ' '=BACK ONE GROUP",
" '+' OR '!' FORWARD ONE GROUP "
20070 PRINT @ 640," '";CHR$(94);" '=AHEAD FIVE GROUPS"," '";
CHR$(93);" '=BACK FIVE GROUPS"
20080 PRINT @ 704," '";CHR$(91);
" '=CURSOR UP ONE BYTE"," '";CHR$(92);
" '=CURSOR DOWN ONE BYTE "
20090 PRINT @ 768," 'X'=EXIT PROGRAM/EDITING"," 'M'=GOTO
EDIT MODE":PRINTTAB(9)"<ENTER>=CHANGE TO LAST NUMERICAL VALUE"
20100 PRINT @ 0,"";: C=0: C$="": B$="": E$="": F$="":
F=0: FOR I=B TO B+7
20110 K=PEEK(I): IF K>191 OR K<32 GOTO 20120 ELSE PRINT " ";
I,K,CHR$(K),,:GOTO 20130
20120 PRINT " ";I,K,"<UNPRINTABLE>",,:
20130 NEXT
20140 PRINT @ 512, STRING$(64,140);
20150 A$=INKEY$
20160 IF A$="-" AND B>A THEN B=B-8: GOTO 20060
20170 IF A$="+" OR A$=";" THEN B=B+8: GOTO 20060
20180 IF A$=CHR$(8) AND B>40+A THEN B=B-40: GOTO 20060
20190 IF A$=CHR$(9) THEN B=B+40: GOTO 20060
20200 IF A$=">" AND G>0 THEN G=G-64: H=H-1
20210 IF A$=CHR$(10) AND G<=384 THEN G=G+64: H=H+1
20220 IF A$="X" GOTO 20360
20230 IF A$="M" GOTO 20280
20240 IF A$=CHR$(13) THEN POKE C,M: GOTO 20100
20250 POKE 15361+G,94: IF G<L POKE 15361+L,32: L=G
20260 C=H+B
20270 PRINT @ 832,"";: GOTO 20150
20280 POKE 15360+G,77: FOR I=1 TO 3
20290 E$=INKEY$: IF E$="" GOTO 20290
20300 IF E$="X" THEN 20100
20310 IF ASC(E$)<48 OR ASC(E$)>57 GOTO 20290
20320 F$=F$+E$: PRINT @ G+32,CHR$(30);
20330 PRINT @ G+17,F$,CHR$(30);
20340 NEXT: F=VAL(F$): M=VAL(F$): IF F>250 GOTO 20280
20350 POKE C,F: POKE 15360+G,32: GOTO 20100
20360 END

```

FIGURE 1

DECIMAL	CHARACTER	DECIMAL	CHARACTER
0	NULL	48	0
1	BREAK	49	1
2	STX	50	2
3	ETX	51	3
4	EOT	52	4
5	ENQ	53	5
6	ACK	54	6
7	BEL	55	7
8	BACKSPACE	56	8
9	HT	57	9
10	LINEFEED	58	:
11	VT	59	;
12	FF	60	<
13	CARRIAGE RET.	61	=
14	CURSOR ON	62	>
15	CURSOR OFF	63	?
16	DLE	64	@
17	DC1	65	A
18	DC2	66	B
19	DC3	67	C
20	DC4	68	D
21	NAK	69	E
22	SYN	70	F
23	32 C/L	71	G
24	CAN	72	H
25	EM	73	I
26	SUB	74	J
27	ESC	75	K
28	CURSOR HOME	76	L
29	BOL	77	M
30	EREOL	78	N
31	EREOF	79	O
32	SPACE	80	P
33	!	81	Q
34	"	82	R
35	#	83	S
36	\$	84	T
37	%	85	U
38	&	86	V
39	'	87	W
40	(88	X
41)	89	Y
42	*	90	Z
43	+	91	UP ARROW
44	,	92	DOWN ARROW
45	-	93	LEFT ARROW
46	.	94	RIGHT ARROW
47	/	95	

DECIMAL CODE	FUNCTION
0-7	NONE
8	BACKSPACE AND ERASE CURRENT CHARACTER
9	NONE
10	LINE FEED WITH CARRIAGE RETURN
11	MOVE CARRIAGE TO TOP OF FORM (PAGE)

continued on page 40

ATTENTION COMPARISON SHOPPERS

HOW DOES A \$299 BYTEWRITER-1 STACK UP AGAINST A \$650 EPSON MX-80? YOU DECIDE!

The Only 80 Column Dot Matrix Printer Under \$300.


Why do we dare to compare the Bytewriter-1 to the Epson MX-80, the industry leader? Because we feel strongly that dollar for dollar, the Bytewriter-1 is tough to beat for performance and quality.

Our extensive testing has proved that the Bytewriter-1 interfaces problem-free to the TRS-80, the Apple II and the Atari 400 and 800.

We are not going to tell you that the Bytewriter-1 is better than the MX-80, but by comparison, and for half the cost, you get more than a reliable printer — you get a great value.

Call or write for more information today.

**Comparable features.
Uncomparable price.**



MICROTEK inc.

9514 Chesapeake Drive
San Diego, CA 92123
(714) 278-0633
Outside CA call
TOLL FREE (800) 854-1081
TWX. 910-335-1269

TRS-80 is a trademark of Radio Shack, Div.
of Tandy Corp.
Apple II is a trademark of Apple Computer,
Inc.
Atari 400 & 800 are trademarks
of Atari, Inc.
MX-80 is a trademark of
Epson America, Inc.

FEATURES	BYTEWRITER-1	EPSON MX-80*
Print speed	60 lines per minute	46 lines per minute
Paper feed	Friction feed original plus 3 copies	Pin feed original plus 2 copies
Ribbon	Black, cartridge \$9.95	Black, cartridge \$14.00
Life expectancy	Printhead — 100 million char. Drive Mech. — 10 million char. Ribbon — 5 million char.	50 — 100 million char. 5 million char. 3 million char.
Dimensions	3.8" x 15" x 9"	5.2" x 14.7" x 12"
Character set	96 ASCII	96 ASCII
Interface	Parallel	Parallel
Warranty	90 days	90 days
Printhead replacement	\$29.95	\$30
Cost	\$299	\$650

*Data source: Epson MX-80
Operation Manual



**30 Day
Money Back
Guarantee**

BEGINNER'S CORNER

Sherry M. Taylor

PERIPHERALS AND PARAPHERNALIA FOR THE TRS-80 (PART II)

Here we are, dear friends and neighbors, for another gathering of the BEGINNERS' CORNER. I hope that the past month has brought you many exciting discoveries about your TRS-80, it certainly has for me.

I have just begun a part-time job working with a Model II TRS-80 that has 4 disk drives. It has given me new knowledge and the opportunity to be paid for doing something that I love to do. My boss suggests that I pay HIM for the use of his computer since I thought it was so much fun. I explained that if I paid him, I'd be playing STAR TREK. Since that wouldn't get HIS work done, he's paying ME!

Last month, we discussed printers: The different types and the terms used to talk about them. You should have a working knowledge that will help you ask the right questions of your salesperson. This time we are going to cover disk drives.

Most of us beginners start out with cassette recorders for memory storage. We also start out with the unreliability and slow speed of cassettes. The Model I is equipped with 500 baud. The Model III has both 500 and 1500 baud. (Baud is a technical term used for the speed of data transfer. It is used interchangeably for "bits per second.") In simpler terms, the Model I cassette transfers data at 500 bits per second. The Model III cassette at 1500 bits per second. At first that may sound mighty fast, but compared to the transfer rate of a disk drive of 100,000 bits per second (for the Model I), the cassette is relatively S-L-O-W! The transfer rate for the Model III disk drive is 150,000 bits per second, and for the Model II a whopping 500,000 bits per second!

Disk drives are fancy recorders in that they also sport a read/record head. Cassette recorders transfer data to a thin strip of mylar (plastic) coated with iron oxide. (Iron oxide because it can be magnetized.) Disk drives transfer data to a thin sheet of mylar cut in a circle. This circle is permanently sealed inside a protective sleeve rather like a 45 rpm record in its paper shield. The read/record head moves from the outer edge to the center while the disk spins inside its sleeve (at 300 rpm), just as the needle follows the grooves on a record spinning on the turntable. (Just in case you are wondering, there is an oval hole in the sleeve so that the read/record head can touch the magnetic surface.)

The grooves on a record form a tight spiral. (That is why the needle slowly moves from the outer edge to the center as the record plays.) On the diskette, the areas of magnetism form concentric circles. These "circles" are called "tracks."

It used to be that there was only 1 type of disk drives to be had. But with the fast-paced competition among computer companies, you now have several types to choose from. This not only gives you more choices, but also more decisions. You now have to know just what you want.

The "flippy" drive: This sounds rather strange, but it is a real gadget. This type of drive allows the use of both sides of a diskette with a single read/record head simply by turning the diskette over. (Like playing the "flip" side of STRANGERS IN THE NIGHT.) This gives you more storage on a single disk, but be sure you label the disk properly. You don't want to play STRANGERS IN THE NIGHT when you really wanted HEARTBREAK HOTEL. Also, you will need a disk head cleaning kit even more with this type of drive. Dirt, dust and minute particles of coating are more of a problem with this type of drive. You will also have to use diskettes that carry certification for BOTH sides. These are more expensive.

The "double sided" drive. (This sounds like a two-faced friend.) This term refers to the number of read/record heads. Double-sided drives have two read/record heads allowing read/record operations on both sides of the diskette. A double-sided drive appears as two separate drives to the computer. You will need diskettes certified on both sides for this one, also. "Single-sided" drives have one read/record head and therefore read/record on only ONE side of the diskette.

"Track density" is specified in TRACKS PER INCH. It refers to the number of tracks per radial inch, that is, measured from the outside edge toward the center. Typically 48 tracks per inch will give you 40 usable tracks. Ninety-six (96) tracks per inch will give you 80 usable tracks. To get the 80 tracks, less space is given between the tracks (or "circles.")

"Double density" refers to recording density in BITS per inch. For double density, the 1's and 0's are packed more closely together. Typically, single density will record 2,938 bits per inch. Double density will record 5,876 bits per inch. That's a lot of data! You can also get disk drives with a combination of high track density and double density recording. Therefore, there are such animals as 80 track, double density disk drives. That's even MORE data on a diskette!!

Diskettes are fairly more reliable than cassette tapes, but please remember that they are more fragile. They do not come in hard plastic boxes. The rules that apply to the care of cassettes also apply to diskettes. Do not place diskettes near a magnetic field. These are

DYNACOMP

Quality software for*:

ATARI
PET
APPLE II Plus

TRS-80 (Level II)**
NORTH STAR
CP/M Disks/Diskettes

CARD GAMES

BRIDGE 2.0 (Available for all computers) Price: \$17.95 Cassette/\$21.95 Diskette
An all-inclusive version of this most popular of card games. This program both BIDS and PLAYS either contract or duplicate bridge. Depending on the contract, your computer opponents will either play the offense OR defense. If you bid too high, the computer will double your contract! BRIDGE 2.0 provides challenging entertainment for advanced players and is an excellent learning tool for the bridge novice. See the software review in 80 Software Critique.

HEARTS 1.5 (Available for all computers) Price: \$15.95 Cassette/\$19.95 Diskette
An exciting and entertaining computer version of this popular card game. Hearts is a trick-oriented game in which the purpose is not to take any hearts or the queen of spades. Play against two computer opponents who are armed with hard-to-beat playing strategies. HEARTS 1.5 is an ideal game for introducing the uninitiated (your spouse) to computers. See the software review in 80 Software Critique.

POKER PARTY (Available for all computers) Price: \$17.95 Cassette/\$21.95 Diskette
POKER PARTY is a draw poker simulation based on the book, POKER, by Oswald Jacoby. This is the most comprehensive version available for microcomputers. The party consists of yourself and six other (computer) players. Each of these players (you will get to know them) has a different personality in the form of a varying propensity to bluff or fold under pressure. Practice with POKER PARTY before going to that expensive game tonight! Apple II cassette and diskette versions require a 12 K (or larger) Apple II.

CRIBBAGE 2.0 (TRS-80 only) Price: \$14.95 Cassette/\$19.95 Diskette
This is simply the best cribbage game available. It is an excellent program for the cribbage player in search of a worthy opponent as well as for the novice wishing to improve his game. The graphics are superb and assembly language routines provide rapid execution. See the software review in 80 Software Critique.

EDUCATION

TEACHER'S PET I (Available for all computers) Price: \$11.95 Cassette/\$15.95 Diskette
This is the first of DYNACOMP's educational packages. Primarily intended for pre-school to grade 3, TEACHER'S PET provides the young student with counting practice, letter word recognition and three levels of math exercises.

MORSE CODE TRAINER (TRS-80 only) Price: \$12.95 Cassette/\$16.95 Diskette
MORSE CODE TRAINER is designed to develop and improve your speed and accuracy in deciphering Morse Code. As such, MCT is an ideal software package for FCC test practice. The code sound is obtained through the earphone jack of any standard cassette recorder. You may choose the pitch of the tones as well as the word rate. Also, various modes of operation are available including number, punctuation and alphabet tests, as well as the keying of your own message. A very effective way to learn code.

THOUGHT PROVOKERS

FLIGHT SIMULATOR (Available for all computers) Price: \$17.95 Cassette/\$21.95 Diskette
A realistic and extensive mathematical simulation of take off, flight and landing. The program utilizes aerodynamic equations and the characteristics of a real aircraft. You can practice instrument approaches and navigation using radials and compass headings. The more advanced flyer can also perform loops, half-rolls and similar aerobatic maneuvers. Although this program does not employ graphics, it is exciting and very addictive. See the software review in COMPTONICS.

VALDEZ (Available for all computers) Price: \$15.95 Cassette/\$19.95 Diskette
VALDEZ is a computer simulation of supertanker navigation in the Prince Valdemar Sound/Vadnais region of Alaska. Included in this simulation is a realistic and extensive 256 x 256 element map, portions of which may be viewed using the ship's alphanumeric radar display. The motion of the ship itself is accurately modeled mathematically. The simulation also contains a model for the tidal patterns in the region, as well as other traffic (outgoing tankers and drifting icebergs). Chart your course from the Gulf of Alaska to Valdez Harbor. See the software review in 80 Software Critique.

NOMINOES JIGSAW (Atari, Apple and TRS-80 only) Price: \$16.95 Cassette/\$20.95 Diskette
A jigsaw puzzle on your computer! Complete the puzzle by selecting your pieces from a table consisting of 60 different shapes. NOMINOES JIGSAW is a virtuous programming effort. The graphics are superlative and the puzzle will challenge you with its three levels of difficulty. Scoring is based upon the number of guesses taken and by the difficulty of the board set up. The NOMINOES JIGSAW is available for TRS-80 color computer.

CHESS MASTER (North Star and TRS-80 only) Price: \$19.95 Cassette/\$23.95 Diskette
This complete and very powerful program provides five levels of play. It includes castling, en passant captures and the promotion of pawns. Additionally, the board may be preset before the start of play, permitting the examination of "book" plays. To maximize execution speed, the program is written in assembly language (by SOFTWARE SPECIALISTS of California). Full graphics are employed in the TRS-80 version, and two widths of alphanumeric display are provided to accommodate North Star users.

STAR TREK 3.2 (Available for all computers) Price: \$11.95 Cassette/\$15.95 Diskette
This is the classic Star Trek simulation, but with several new features. For example, the Klingons now shoot at the Enterprise without warning while also attacking starbases in other quadrants. The Klingons also attack with both light and heavy cruisers and move when shot at! The situation is hectic when the Enterprise is besieged by three heavy cruisers and a starbase SOS is received! The Klingons get even! See the software reviews in ANALOG, 80 Software Critique and Game Merchandising.

GAMES PACK I (Available for all computers) Price: \$10.95 Cassette/\$14.95 Diskette
GAMES PACK I contains the classic computer games of BLACK JACK, LUNAR LANDER, CRAPS, HORSE RACE, SWITCH and more. These games have been combined into one large program for ease in loading. They are individually accessed by a convenient menu. This collection is worth the price just for the DYNACOMP version of BLACK JACK.

GAMES PACK II (Available for all computers) Price: \$10.95 Cassette/\$14.95 Diskette
GAMES PACK II includes the games CRAZY EIGHTS, FORTY, ACES DEUCE, LIFE, WUMPS and others. As with GAMES PACK I, all the games are loaded as one program and are called from a menu. You will particularly enjoy DYNACOMP's version of CRAZY EIGHTS.

Why pay \$7.95 or more per program when you can buy a DYNACOMP collection for just \$10.95?

STATISTICS and ENGINEERING

DIGITAL FILTER (Available for all computers) Price: \$29.95 Cassette/\$33.95 Diskette
DIGITAL FILTER is a comprehensive data processing program which permits the user to design his own filter function or choose from a menu of filter forms. The filter forms are subsequently converted into non recursive convolution coefficients which permit rapid data processing. In the explicit design mode the shape of the frequency transfer function is specified by directly entering points along the desired filter curve. In the menu mode, ideal low pass, high pass and bandpass filters may be approximated to varying degrees according to the number of points used in the calculation. These filters may optionally also be smoothed with a Hanning function. In addition, multi-stage Butterworth filters may be selected. Features of DIGITAL FILTER include plotting of the data before and after filtering, as well as displays of the chosen filter functions. Also included are convenient data storage, retrieval and editing procedures.

FOURIER ANALYZER (Available for all computers) Price: \$16.95 Cassette/\$20.95 Diskette
Use this program to examine the frequency spectra of limited duration signals. The program features automatic scaling and plotting of the input data and results. Practical applications include the analysis of complicated patterns in such fields as electronics, communications and business.

TFA (Transfer Function Analyzer) Price: \$19.95 Cassette/\$23.95 Diskette
This is a special software package which may be used to evaluate the transfer functions of systems such as hi-fi amplifiers and filters by examining their response to pulsed inputs. TFA is a major modification of FOURIER ANALYZER and contains an engineering-oriented decibel versus log frequency plot as well as data editing features. Whereas FOURIER ANALYZER is designed for educational and scientific use, TFA is an engineering tool. Available for all computers.

HARMONIC ANALYZER (Available for all computers) Price: \$24.95 Cassette/\$28.95 Diskette
HARMONIC ANALYZER was designed for the spectrum analysis of repetitive waveforms. Features include data file generation, editing and storage, retrieval as well as data and spectrum plotting. One particularly unique facility is that the input data need not be equally spaced or in order. The original data is sorted and a cubic spline interpolation is used to create the data file required by the FFT algorithm.

FOURIER ANALYZER, TFA and HARMONIC ANALYZER may be purchased together for a combined price of \$44.95 (three cassettes) and \$56.95 (three diskettes).

REGRESSION I (Available for all computers) Price: \$19.95 Cassette/\$23.95 Diskette
REGRESSION I is a unique and exceptionally versatile one-dimensional least squares "polynomial" curve fitting program. Features include very high accuracy, automatic degree determination option, an extensive internal library of fitting functions, data editing, automatic data and curve plotting, a statistical analysis (e.g., standard deviation, correlation coefficient, etc.) and much more. In addition, new fits may be tried without reentering the data. REGRESSION I is certainly the most versatile program in any data analysis software library.

REGRESSION II (PARAFIT) (Available for all computers) Price: \$19.95 Cassette/\$23.95 Diskette
PARAFIT is designed to handle those cases in which the parameters are imbedded (possibly nonlinearly) in the fitting function. The user simply inserts the functional form, including the parameters (A11, A12, etc.) as one or more BASIC statement lines. Data and results may be manipulated and plotted as with REGRESSION I. Use REGRESSION I for polynomial fitting and PARAFIT for those complicated functions.

MULTILINEAR REGRESSION (MLR) (Available for all computers) Price: \$24.95 Cassette/\$28.95 Diskette
MLR is a professional software package for analyzing data sets containing two or more linearly independent variables. Besides performing the basic regression calculation, this program also provides easy to use data entry, storage, retrieval and editing functions. In addition, the user may interrogate the solution by supplying values for the independent variables. The number of variables and data size is limited only by the available memory.

REGRESSION I, II and MULTILINEAR REGRESSION may be purchased together for \$49.95 (three cassettes) or \$61.95 (three diskettes).

ANOVA (Available for all computers) Price: \$39.95 Cassette/\$43.95 Diskette
In the past the ANOVA (analysis of variance) procedure has been limited to the large mainframe computers. Now DYNACOMP has brought the power of this method to small systems. For those conversant with ANOVA, the DYNACOMP software package includes the 1 way, 2 way and N way procedures. Also provided are the Yates 2^h P factorial designs. For those unfamiliar with ANOVA, do not worry. The accompanying documentation was written in a tutorial fashion (by a professor in the subject) and serves as an excellent introduction to the subject. Accompanying ANOVA is a support program for building the data base. Included are several convenient features including data editing, deleting and appending.

BASIC SCIENTIFIC SUBROUTINES, Volume I (Not available for Atari)
DYNACOMP is the exclusive distributor for the software keyed to the popular text BASIC Scientific Subroutines, Volume I by J. Rudelshel (see the BYTE McGraw Hill advertisement in BYTE magazine, January 1981). These subroutines have been assembled according to chapter. Included with each collection is a menu program which selects and demonstrates each subroutine.

Collection #1: Chapters 2 and 3. Data and function plotting, complex variables.
Collection #2: Chapter 4. Matrix and vector operations.
Collection #3: Chapters 5 and 6. Random number generators, series approximations.

Price per collection: \$14.95 Cassette/\$18.95 Diskette.
All three collections are available for \$19.95 (three cassettes) and \$49.95 (three diskettes).

Because the text is a vital part of the documentation, BASIC Scientific Subroutines, Volume I is available from DYNACOMP for \$19.95 plus \$4 postage and handling.

ROOTS (Available for all computers) Price: \$10.95 Cassette/\$14.95 Diskette
In a nutshell, ROOTS simultaneously determines all the zeroes of a polynomial having real coefficients. There is no limit on the degree of the polynomial, and because the procedure is iterative, the accuracy is generally very good. No initial guesses are required as input, and the calculated roots are substituted back into the polynomial and the residuals displayed.

UTILITIES

GRAFIX (TRS-80 only) Price: \$16.95 Cassette/\$18.95 Diskette
This unique program allows you to easily create graphics directly from the keyboard. You "draw" your figure using the program's extensive cursor controls. Once the figure is made, it is automatically appended to your BASIC program as a string variable. Draw a "happy face" call a HS and then print it from your program using PRINT HS. This is a very easy way to create and save graphics.

TIDY (TRS-80 only) Price: \$10.95 Cassette/\$14.95 Diskette
TIDY is an assembly language program which allows you to renumber the lines in your BASIC program. TIDY also removes unnecessary spaces and RE MARK statements. The result is a compacted BASIC program which uses much less memory space and executes significantly faster. (Time loaded TIDY remains in memory; you may load any number of BASIC programs without having to reload TIDY.)

ORDERING INFORMATION

All orders are processed and shipped within 48 hours. Please enclose payment with order and include the appropriate computer information. If paying by VISA or MasterCard, include all numbers on card.

Shipping and Handling Charges

Within North America: Add \$1.50
Outside North America: Add 10% (Air Mail)

Delivery

All orders (excluding books) are sent First Class.

Quantity Discounts

Deduct 10% when ordering 3 or more programs. Dealer discount schedules are available upon request.

Ask for DYNACOMP programs at your local software dealer. Write for detailed descriptions of these and other programs from DYNACOMP.

DYNACOMP, Inc.

1427 Monroe Avenue, Dept. T

Rochester, New York 14618

24 hour mail order phone: (716) 586-7579

Office phone (9AM-5PM EST): (716) 442-8960

New York State residents please add 7% NY sales tax.

VISA



*ATARI, PET, TRS-80, NORTHSTAR, and CPM are registered trademarks and/or trademarks.

**TRS-80 diskettes are not supplied with DOS or BASIC. All DYNACOMP programs for TRS-80 will run on model III with the exception of TIDY, GRAPHICS, CRIBBAGE 2.0.

created around motors and power supplies. Don't leave them where the temperature is prone to rise to high levels. DON'T ever leave them in a hot car! You'll have a melt down! (Even though you may look strange in the grocery store carrying diskettes, look strange. Better to look strange than to lose valuable data!)

Keep diskettes away from the jam-covered hands of your 2 year old. (Or your spouse if he/she eats jam.) Do not stack things on top of the diskettes. Keep pressure to the sides at a minimum. DON'T use diskettes as a frisbee. And last, but not least, keep them out of the hands of would-be computer operators who do not know what they are doing. Many valuable files have been lost this way. (Believe me, I know. I had a file of 575 customers CRASH for that very reason.)

The obvious necessity of BACKUP copies of your valuable files cannot be over emphasized. A backup copy placed in a safe place away from trouble can save you a lot of hard work and frustration. In my work situation, I have 3 backup copies just in case something happens to my working master. I don't want to type all 600 customer names all over again. It gets boring!

Next to the printer, the disk drives are the most popular addition to a computer system, be it hobby oriented or business oriented. (Yes, there are business applications that have been run quite well on cassette systems. But as the business grows, you quickly outgrow cassettes.)

Going to disk also presents the aspect of learning new commands that are supplied by TRSDOS (pronounced "Triss-doss"). "DOS" stands for Disk Operating System. Something has to guide the use of that equipment and it is not included in your Level II ROM. With TRSDOS (or the other DOS's that are available), you get nifty commands like the following (note: FORMS, FREE, and HELP apply only to the Models 2 and 3):

ATTRIB: to change a file password.

CLOCK: turn on the clock display

COPY: copy a file or files to another diskette without copying all the files (as in BACKUP.)

DEBUG: start debug monitor for machine-language programming or fixing.

DIR: list the diskette directory (or contents page.)

FORMS: set printer line widths and lines per page.

FREE: display disk allocation map. Shows you how much of the disk is used track by track.

HELP: Explanation of a TRSDOS command. HELP BACKUP will give you the syntax format, definition and explanation. HELP SYNTAX will explain the HELP descriptions. (A nice command when you can't remember.)

KILL: Delete a file or group of files.

BACKUP: make an exact duplicate of a diskette.

FORMAT: erase and prepare a diskette to accept data.

There are many more. For an inspiring hour of reading, locate a Disk System Owner's Manual and just drift through it. You will be amazed at the power you will have when you go disk.

Not only do you get the commands of TRSDOS, but all those words you have been using, but got L3 errors for, will be usable. Like, KILL, OPEN, CLOSE, CMD, DEF FN (define function), NAME (renumber the current program), MERGE, GET and PUT. All of these come to you complements of Disk BASIC, a great enhancement to the Level II language we all know and love. More power to the user!

Well, so much for our discussion of disk drives. If you have any questions, remember, you can write to me. If I don't know the answer, I'll track it down and get back to you. (Please include a SASE.)

* * * * *

Now for our Dictionary of Computerese:

kilobit: one thousand bits

kilomegabit: one thousand million bits

kludge: a slang word of endearment for your pet TRS-80 computer.

stopper: (rubber device that keeps water in the bathtub?) The highest memory location in any given system.

Next month we will go on to a discussion of other peripherals that are available for the TRS-80. So tune in again, next month, same time, same station, and have a very happy Thanksgiving holiday.

Sherry M. Taylor

322 So. 21st Street

Haines City, FL 33844

■

TRS-80/RS-232 ADAPTER: Connect RS-232 printer to line printer port on Mod 3 or Mod 1 Expansion Interface. No software driver required. Leaves TRS-80 RS-232 port free for modem use. Set at 1200 baud, or specify rate (300-9600). TU8014, \$69.95.

MX-80 FRICTION FEED: Upgrade to use single sheet, tractor, or roll paper with MX-80. Install in 15 minutes, using only screwdriver and pliers. No drilling or cutting. FFU/80, only \$69.95

Virginia Micro Systems, 14415 Jeff Davis Hwy
Woodbridge VA 22191, (703)491-6502
Add \$2 P&H. Mail order only. VA Residents add 4%

Attention BARGAIN HUNTERS

Receive Hundreds of Classified Ads
Like These Every Month

HARD DISK DRIVE Diablo Mod 31 1.2 MByte std. density. Includes power supp. and cable, rack mount slides, amd manual. Excellent condition. \$450. Call 1601 1601

IMPACT PRINTER 165 CPS Serial and parallel interfaces-Eight Selectable character sizes-Single and double width characters-uses standard plain paper - same mechanism as the integral data system. 1 year old \$589, 1601

HEATHKIT H-11/DEC LSI-11 system, 32K Byte storage, reader 1 punch, video terminal, complete software. Cost \$4500 assembled, \$3500 kit. Like new. Sell for \$2250. 305-962-6677. 2058 Griffin Rd., Ft. Lauderdale, FL 33312.

FOR SALE: Interdata (Perkin-Elmer) 7/16 Mini with 32KB core, front panel, 50A PWR supply. Includes HS tape reader, interfaces for LP, 2 (TTY), and RS-232 (Full duplex, programmable). Includes manuals and much SW (Basic, Fortran, OS, etc.). \$800 - After 6 PM 303-2035

COMPUTER AUTOMATION ALPHA 16; 16 k-word core memory, RTC, PF-R. Modified Mod. ASR-33 TTY. Manuals, utilities, assemblers and many option boards - 16 bit I/O Driver, 16 bit I/O, Asynch modem contr. 64 bit output, 10 bit A/D - D/A. Fairly complete documentation. Up and running in Fortran. Not much more than TTY at \$1000. Herb Sauer, 303-494-8724.

FOR SALE: Heath H9 video terminal, excellent condition, \$175 or best offer. You ship. [214] 962-4484

WANTED: DIGITAL Group 32K memory board without memory chips and Phi deck controller board (kit, assembled or not working). 1510 NW 35th.

PET COMPUTERS moving up to LSI-11 Pet business system priced to sell. PET 2001-16N Computer \$800; 2040 Dual Floppy 340K (holds more data than 6 TRS-80 disks) \$1,100. Digital cassettes (2) \$60 each. System complete with Text Editor, disk sort, database software, real estate software and more \$2,100. Call PAUL (313)971-8447

COMPUTER SHOPPER, the new buy, sell, and trade publication, is ready to help you with the latest information on personal, small business and large-system computers, accessories and software.

Each ad-packed issue is full of bargains you are looking for. Included are ads from individuals throughout the United States who are selling their good, pre-owned equipment just so they can trade-up to new equipment coming on the market.

But, COMPUTER SHOPPER'S bargains won't be yours unless you subscribe. This useful, money-saving publication can become your way to communicate with other buyers, sellers, and traders all over the nation.

Whether you are a hobbyist or a part-time user, COMPUTER SHOPPER will put you in touch with the nationwide computer marketplace in time for you to take advantage of bargain opportunities.

Have something to sell? A COMPUTER SHOPPER subscriber probably wants to buy it.

Looking for a part, component or even a complete system? A COMPUTER SHOPPER subscriber probably wants to sell it.

COMPUTER SHOPPER is THE marketplace for anything in computers and is read by thousands of people who are ready to buy.

COMPUTER SHOPPER offers a unique format in which classified ads are categorized for fast location of specific items. Combining this with low individual ad rates — 10 cents a word —



makes it the ideal place for buyers and sellers to communicate. And, its mix of individual, dealer, and manufacturer ads enable subscribers to find what they want at the best price possible.

COMPUTER SHOPPER will work for you in other ways, too. If you are just thinking about getting into computers, it can help you learn product availability and prices before you make a decision. And, through the timely ads, COMPUTER SHOPPER will keep you abreast of changes in the market which could create bargain opportunities for you.

BUT COMPUTER SHOPPER cannot work for you unless you subscribe.

Want to look us over first? We'll give you your first issue FREE and then bill you for the next 12. If you are not convinced COMPUTER SHOPPER suits your needs, just write "cancel" on the invoice and return it.

And, to let COMPUTER SHOPPER start working for you right now, with a paid subscription we'll also give you a FREE classified ad to sell your pre-owned equipment or to find equipment you want.

If you don't need to use the free classified ad now, use it anytime during your subscription.

Subscription: \$10/year, 12 issues plus your first free one. Bank cards accepted. Money back guarantee.



The Nationwide Marketplace for Computer Equipment

COMPUTER SHOPPER

P.O. Box 23 • Titusville, Florida 32780

Telephone 305-269-3211

MasterCharge or VISA orders only, call TOLL FREE 800-327-9920.

SAVINGS ACCOUNT

Jay R. Newirth

This program will maintain a perpetual record of your savings account data by saving the data either on cassette or disk. Each version is detailed below. The program has five main options as follows:

- <1> Post Transactions
- <2> List Transactions on Video
- <3> Write DATA to Disk or Cassette
- <4> Read DATA from Disk or Cassette
- <5> Exit the program

Option <1> has is further broken down into five other options:

- <1> Transfer to Checking Account
- <2> Transfer from Checking Account
- <3> Deposit to Savings Account
- <4> Withdrawal from Savings Account
- <5> Interest Paid on Savings Account

Options <1> and <2> are for those persons who have a checking/savings account where you can transfer money from one account to the other.

DISK VERSION

The Disk Version will automatically save all data in a file named "SAVINGS/DAT" and will save the file automatically on drive 0. If you wish to change the file name and/or the drive number, change the following lines:

```
LINE #1120 OPEN"0",1,"YOUR FILENAME:DN"
LINE #1330 OPEN"I",1,"YOUR FILENAME:DN"
```

If you think you will post more than 100 transactions, you will have to change the DIMension statement contained in line #80 and the CLEAR statement in line #70 as follows:

```
LINE #80 DIM D$(N),A$(N),CR(N),DB(N),BF(N)
where N= number of transactions
```

```
LINE #70 CLEAR XXXX
where XXXX = aprx. 3000 bytes/100 records
```

CASSETTE VERSION

It is important to remember to load the data tape into the computer before you add new transaction, otherwise you run the possibility of "writing over" old data with new data and thus ruining your data tape. If you follow the instruction prompts, you should have no real problems.


```
10 ' SAVING ACCOUNT PROGRAM - CASSETTE VERSION
20 ' WRITTEN BY JAY R. NEWIRTH , 1/78 (REV. 4/81)
30 ' 3208 BONNIE ROAD....BALTIMORE, MARYLAND.....21208
40 '
50 '
60 CLS
70 CLEAR 3000
80 DIM D$(100), A$(100), TR$(100), CR(100), DB(100), BF(100)
90 GOSUB 1450
100 '
110 '....PRINT MAIN MENU
120 '
130 CLS
140 PRINT @ 20, "*** SAVINGS ACCOUNT PROGRAM ***"
150 PRINT
160 PRINT "SELECT OPTION"
170 PRINT STRING$(13, 131)
180 PRINT "<1> POST TRANSACTIONS"
190 PRINT "<2> LIST TRANSACTIONS (VIDEO)"
200 PRINT "<3> WRITE DATA TO CASSETTE"
210 PRINT "<4> READ DATA FROM CASSETTE"
220 PRINT "<5> EXIT PROGRAM"
230 '
240 '....ENTER SELECTION
250 '
260 PRINT @ 704, "ENTER YOUR CHOICE....."
270 I$=INKEY$
280 IF I$ = "" THEN 270
290 X=VAL(I$)
300 IF X < 1 OR X > 5 THEN 270
310 ON X GOTO 340, 920, 1050, 1250, 1540
320 '....POSTING TRANSACTIONS SECTION
330 '
340 IF P1 = 0 THEN I=1 : GOTO 370
350 I=P1+1
360 GOTO 390
370 CLS
380 INPUT "ENTER YOUR INITIAL BALANCE: ";BF(0)
390 CLS
400 PRINT "POSTING TRANSACTIONS"
410 PRINT STRING$(64, 131);
420 PRINT "TRANSACTION #" I
430 INPUT "ENTER TRANSACTION DATE <MM/DD/YY>: ";D$(I)
440 PRINT
450 PRINT "SELECT OPTION"
460 PRINT STRING$(13, 131)
470 PRINT "<1> TRANSFER TO CKACCT"
480 PRINT "<2> TRANSFER FROM CKACCT"
490 PRINT "<3> DEPOSIT"
500 PRINT "<4> WITHDRAWAL"
510 PRINT "<5> INTEREST PAID"
520 I$=INKEY$
530 IF I$ = "" THEN 520
540 X=VAL(I$)
550 IF X < 1 OR X > 5 THEN 520
```

```

560 ON X GOTO 600, 620, 640, 660, 680
570 '
580 '....ASSIGN TRANSACTION NAME DEPENDING ON SELECTION
590 '
600 A$(I)="TRNSF. TO CKACTION."
610 GOTO 700
620 A$(I)="TRNSF. FROM CKACTION."
630 GOTO 730
640 A$(I)="DEPOSIT"
650 GOTO 730
660 A$(I)="WITHDRAWAL"
670 GOTO 700
680 A$(I)="INTEREST PAID"
690 GOTO 730
700 PRINT
710 INPUT "ENTER DEBIT AMOUNT";DB(I)
720 GOTO 780
730 PRINT
740 INPUT "ENTER CREDIT AMOUNT";CR(I)
750 '
760 '.....CALCULATE NEW BALANCE
770 '
780 BF(I)=BF(I-1)+CR(I)-DB(I)
790 PRINT @ 896, "TYPE <C> TO CONTINUE OR <Q> TO QUIT";
800 I$=INKEY$
810 IF I$ = "" THEN 800
820 IF I$ = "C" THEN 850
830 IF I$ = "Q" THEN 870
840 GOTO 800
850 I=I+1
860 GOTO 390
870 P1=I
880 GOTO 130
890 '
900 '....VIDEO LISTING OF TRANSACTIONS
910 '
920 CLS
930 PRINT Y$;
940 PRINT STRING$(64, 45);
950 PRINT USING W$; "INITIAL BALANCE";BF(0);
960 FOR I=1 TO P1
970 PRINT USING V$; D$(I); A$(I); CR(I); DB(I); BF(I);
980 IF I/10 = INT(I/10) THEN 1490
990 NEXT
1000 PRINT @ 960, "PRESS <ENTER> TO RETURN TO MAIN MENU";
1010 IF INKEY$ <> CHR$(13) THEN 1010 ELSE 130
1020 '
1030 '...TRANSFERRING DATA TO CASSETTE
1040 '
1050 CLS
1060 PRINT "SAVING DATA TO CASSETTE"
1070 PRINT STRING$(64, 131);
1080 PRINT "PREPARE CASSETTE RECORDER....REWIND TAPE TO
STARTING POINT....PRESS 'RECORD/PLAY' BUTTONS."
1090 PRINT "PRESS <ENTER> WHEN READY."
1100 IF INKEY$ <> CHR$(13) THEN 1100
1110 PRINT
1120 PRINT TAB(20) "====TRANSFERRING DATA===="
1130 PRINT#-1, P1, BF(0)
1140 FOR I=1 TO P1
1150 PRINT#-1, D$(I);A$(I), CR(I), DB(I), BF(I)

```

TUNE-UP YOUR TRS-80

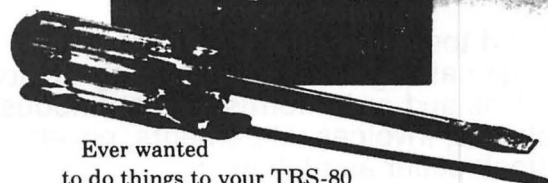

Ever wanted
to do things to your TRS-80
that Radio Shack said couldn't be done?
How about reverse video, high-resolution
graphics, a high-speed clock, and audible
keystrokes?

Not enough? How about turning an
8-track into a mass storage device, making
music, controlling a synthesiser, individual
reverse characters, and a real-time clock?

If the thought of using a screwdriver gives
you the shivers then you can turn to the
software section. Learn how to make
BASIC programs auto-execute, reset
memory size, pack program lines with
machine code, and generate sound effects.

The Custom TRS-80 and Other Mysteries
is packed with page after page of practical
information, and tested software. Get a
copy and turn your TRS-80 into a
supercomputer! Available from your local
IJG dealer for only \$29.95.



1260 West Foothill Blvd.,
Upland, California 91786

(714) 946-5805

TRS-80 is a trademark of Tandy

FREE Computer Forms Catalog

with 32 pages of
continuous
business forms for
small computer
systems

Send today for our NEW full color 32 page catalog with programming guides, prices and order forms for continuous checks, invoices, statements, envelopes, stock paper and labels.

- Quality products at low prices
- Available in small quantities
- Fast Service
- Money Back Guarantee
- Convenient TOLL-FREE ordering

Fast Service by mail or . . . PHONE TOLL FREE

1 + 800-225-9550

Mass. residents 1 + 800-922-8560

8:30 a.m. to 5:00 p.m. Eastern Time Monday — Friday

Please rush a new computer forms catalog to:	CODE 460
Name	
Company	
Street	
City, State and Zip	
Phone	
Computer make & model	

**Neb's
Computer Forms**
78 Hollis Street, Groton, Mass. 01471
A division of New England Business Service, Inc.

```

1160 NEXT
1170 PRINT
1180 PRINT TAB(20) "====TRANSFER COMPLETE===="
1190 FOR X%=1 TO 1500
1200 NEXT
1210 GOTO 130
1220 '
1230 '...TRANSFERRING DATA FROM CASSETTE
1240 '
1250 CLS
1260 PRINT "READING DATA FROM CASSETTE"
1270 PRINT STRING$(64, 131);
1280 PRINT "PREPARE CASSETTE RECORDER.....REWIND TAPE TO
STARTING POINT.....PRESS 'PLAY' BUTTON."
1290 PRINT "PRESS <ENTER> WHEN READY."
1300 IF INKEY$ <> CHR$(13) THEN 1300
1310 PRINT
1320 PRINT TAB(20) "====TRANSFERRING DATA===="
1330 INPUT#-1, P1, BF(0)
1340 FOR I=1 TO P1
1350 INPUT#-1, D$(I), A$(I), CR(I), DB(I), BF(I)
1360 NEXT
1370 PRINT
1380 PRINT TAB(20) "====TRANSFER COMPLETE===="
1390 FOR X%=1 TO 1500
1400 NEXT
1410 GOTO 130
1420 '
1430 '....VARIOUS SUBROUTINES LOCATED HERE
1440 '
1450 Y$=" DATE TRANSACTION TYPE CREDIT DEBIT
BALANCE"
1460 V$="% % % % $$$$$.## $$$$$.##
$$$$$.##"
1470 W$=" % %
$$$$$.##"
1480 RETURN
1490 IF P1 = I THEN 1000 ELSE 1500
1500 PRINT @ 960, "PRESS <ENTER> TO CONTINUE LISTING";
1510 IF INKEY$ <> CHR$(13) THEN 1510
1520 PRINT @ 128, CHR$(31)"";
1530 GOTO 990
1540 CLS
1550 END

```

```

10 ' SAVING ACCOUNT PROGRAM - DISK VERSION
20 ' WRITTEN BY JAY R. NEWIRTH , 1/78 (REV. 4/81)
30 ' 3208 BONNIE ROAD....BALTIMORE, MARYLAND.....21208
40 '
50 '
60 CLS
70 CLEAR 3000
80 DIM D$(100), A$(100), TR$(100), CR(100), DB(100), BF(100)
90 GOSUB 1470
100 '
110 '....PRINT MAIN MENU
120 '
130 CLS
140 PRINT @ 20, "*** SAVINGS ACCOUNT PROGRAM ***"
150 PRINT
160 PRINT "SELECT OPTION"


```

```

170 PRINT STRING$(13, 131)
180 PRINT "<1> POST TRANSACTIONS"
190 PRINT "<2> LIST TRANSACTIONS (VIDEO)"
200 PRINT "<3> WRITE DATA TO DISK"
210 PRINT "<4> READ DATA FROM DISK"
220 PRINT "<5> EXIT PROGRAM"
230 '
240 '....ENTER SELECTION
250 '
260 PRINT @ 704, "ENTER YOUR CHOICE...."
270 I$=INKEY$
280 IF I$ = "" THEN 270
290 X=VAL(I$)
300 IF X < 1 OR X > 5 THEN 270
310 ON X GOTO 340, 920, 1050, 1240, 1560
320 '....POSTING TRANSACTIONS SECTION
330 '
340 IF P1 = 0 THEN I=1 : GOTO 370
350 I=P1+1
360 GOTO 390
370 CLS
380 INPUT "ENTER YOUR INITIAL BALANCE: ";BF(0)
390 CLS
400 PRINT "POSTING TRANSACTIONS"
410 PRINT STRING$(64, 131);
420 PRINT "TRANSACTION #" I
430 INPUT "ENTER TRANSACTION DATE <MM/DD/YY>: ";D$(I)
440 PRINT
450 PRINT "SELECT OPTION"
460 PRINT STRING$(13, 131)
470 PRINT "<1> TRANSFER TO CKACCT"
480 PRINT "<2> TRANSFER FROM CKACCT"
490 PRINT "<3> DEPOSIT"
500 PRINT "<4> WITHDRAWAL"
510 PRINT "<5> INTEREST PAID"
520 I$=INKEY$
530 IF I$ = "" THEN 520
540 X=VAL(I$)
550 IF X < 1 OR X > 5 THEN 520
560 ON X GOTO 600, 620, 640, 660, 680
570 '
580 '....ASSIGN TRANSACTION NAME DEPENDING ON SELECTION
590 '
600 A$(I)="TRNSF. TO CKACT."
610 GOTO 700
620 A$(I)="TRNSF. FROM CKACT."
630 GOTO 730
640 A$(I)="DEPOSIT"
650 GOTO 730
660 A$(I)="WITHDRAWAL"
670 GOTO 700
680 A$(I)="INTEREST PAID"
690 GOTO 730
700 PRINT
710 INPUT "ENTER DEBIT AMOUNT";DB(I)
720 GOTO 780
730 PRINT
740 INPUT "ENTER CREDIT AMOUNT";CR(I)
750 '
760 '.....CALCULATE NEW BALANCE
770 '

```

MAKE BASIC PERFORM LIKE A CHAMPION

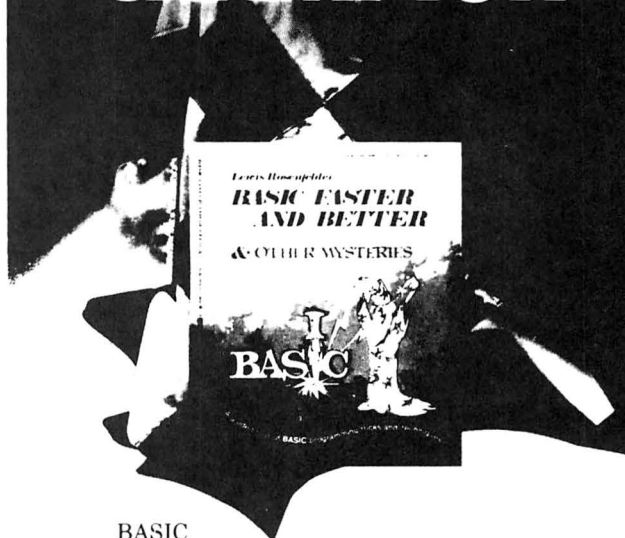

BASIC

is not nearly as slow as most programmers think. *BASIC Faster and Better* shows you how to supercharge your BASIC, with 300 pages of fast, functions and subroutines.

You won't find any trivial poorly designed 'check-book-balancing' programs in this book - it's packed with *useful* programs.

Tutorial for the beginner, instructive for the advanced, and invaluable for the professional, this book doesn't just talk... it shows how! All routines are also available on disk, so that you can save hours of keyboarding and debugging.

The #1 disk *BFBDEM* contains all the demonstration programs, and #2 *BFBLIB* has all the library functions.

BASIC Faster & Better is \$29.95, and the two program disks are \$19.95 each.

Get the book and/or disks direct from *IJG*, or your local *IJG* dealer.



1260 West Foothill Blvd.,
Upland, California 91786
(714) 946-5805

TRS-80 is a trademark of Tandy

'THE SYSTEM'



New TRS-80 Model III

Model III, 48K 2 Siemens Disk Drive system, **\$1799.00**, (plus shipping and handling) includes Dos Plus III operating system.

ADD DISK DRIVES

Internal Drive #1—Includes Micro Mainframes Controller board, Dual Drive Power Supply (for 2 internal disk drives), Mounting Hardware (for 2 internal disk drives), 40 Track Siemens Disk Drive, **\$629.95**

Internal Drive #2—Includes 40 Track Siemens Disk Drive 12 ms Disk Drive, **\$299.95**

Memory Upgrade, 150ns, Prime Chips, Add 16K, **\$44.95**, Add 32K, **\$79.95**

SPECIAL!!!

Internal Drive #1	\$629.95
Internal Drive #2	\$299.95
32K RAM Memory Chips	\$79.00
All Together	\$1009.95
Includes Complete Installation Instructions!	\$849.95

External Drive #3—Includes case (as shown above, dual power supply, cable, mounting hardware for 2 external drives, **\$429.95**

External Drive #4—(same as Internal Drive #2) 40 track disk drive, **\$299.95**

External case (no drives)—Includes case, powers supply (for 2 drives) cable, mounting hardware, (shown above) **\$179.95**.

SPECIAL!!!! Dual External Drives & Case, **\$629.95**

NOTE: Dual Sided Drives—add **\$99.00** per drive.

Flippy Drives (single sided only)—add **\$19.95** per drive.

Dos Plus III (3.3) Operating System, **\$99.95** alone, **\$49.95** with drive purchase.

ACCESSORIES

Put Your Printer on a Pedestal!

This printer stand allows you to place a stack of paper under the printer for neat paper stacking—Available for most printers.

(MX-80, MX-80F/T, LPIV, etc.)	\$24.95
Larger stand (MX-100, Anadex, etc.)	\$29.95
Extra Shelves (Shown Above)	\$9.95

MODEL I DISK DRIVE CASES

Clear Cases for your model I disk drives, complete with power supply for 5-1/4 inch disk drives.

Single Drive Case	\$79.95
Dual Drive Case	\$109.95
Triple Drive Case	\$139.95
Quad Drive Case	\$169.95
Smoked Plexiglass Cases, Add \$5.00/per drive.	

LYNX MODEMS

The finest Auto Answer/Dial Modem on the market! This is a direct connect modem for your model I or III. Does not require an RS232-C interface in your computer! Season Special, **\$299.95**
\$249.95

AMBER EASE

Amber filter for your computer. Amber has been shown to be the easiest on the eyes. Easy to install. (Shown on computer above.) Season Special, All TRS-80 Models, **\$19.95**

TIC-TOC-80 MICROCLOCK

A microclock for your TRS-80 Model I. Gives your computer the correct time and date on powerup. Clock is maintained on a lithium battery for long life. Plugs onto the I/O Buss of the TRS-80 Model I and does not require any modifications for most computers. Complete with extensive documentation and a disk with utilities. **SPECIAL NOW AVAILABLE IN KIT FORM!**

Complete assembled and tested	\$99.95
Kit with P/C board, parts and instructions	\$59.95
Kit with P/C board, parts list and instructions	\$19.95



171 Hawkins Road
Centereach, New York 11720

(516) 981-8568 (Voice)
(516) 588-5836 (Data)
MNET-70331, 105



Dealer Inquiries Welcome

Add \$2.00 S & H
NYS res. add appr. tax

SOFTWARE FOR TRS-80

UNITERM 'The Universal Terminal Program'

The FIRST and ONLY terminal program for both the Model I and Model III TRS-80 computers. Written by Pete Roberts, this program will soon become the standard of terminal software. Unique features includes a Handsome binder with over 75 pages of instructions and examples. Free upgrade policy using local Bulletin Boards and MicroNET. Expanded functions such as 'Type to buffer', 'Display Buffer', Define Auto logon, polling, signon, and connect messages! Requires 32K disk system. Only **\$79.95**

ST80III, OMNITERM, SMART80, SMARTIII owners!!! Upgrade to 'UNITERM'! Send your ORIGINAL program disk and receive 'UNITERM' for only \$29.95!!

CONNECTION-80 BBS

Run your own Computer Bulletin Board. This software package when combined with your Model I or Model III TRS-80 and an Auto Answer Modem will convert your computer into a mini-times share system. Functions include message leaving, both public and private, message retrieving, Bulletins, Downloading, merchandise, product ordering, chat, etc. This is a full feature system, and well known for excellence among modem users. Only **\$199.95**

UTILITY PACK

This package includes three of the most useful programs available for the serious TRS-80 user, by Mike Friedman.

- 1) **Spooler**: Very fast, allows page parameters and perforation skip over automatically. you can even switch DOS's without interrupting printing!
 - 2) **Erase**: Super Purge utility with multiple modes of operation. Allows you to display DIR and position cursor over file to be killed, and then a key stroke and it's gone! You will never use 'KILL' again!
 - 3) **Map**: Places a sector map (LUMP map for NEWDOS/80) of your disk on the screen. Shows free, used and locked out grants.
- ENTIRE PACKAGE ONLY. (Specify Mod I or III), **\$49.95**

COPY III

This Model III Utility, written by Dick Balcom, allows you to load system tapes into your computer at either 500 or 1500 Baud and then copy them onto a new tape at either 500 or 1500 Baud. Includes 10 page instruction manual, **\$9.95**

THE COPYRIGHT KIT

A self-instruction booklet on copyrighting the computer software you write. Includes step by step instructions, sample forms, as well as discussions of copyrights, patents and trade secrets, your rights secured by copyrights, legal remedies upon infringements, material not copyrightable and MUCH MORE! Written by Attorneys. Published by National Attorneys Publications and distributed exclusively through B.T. Enterprises. IF YOU EVER WROTE A COMPUTER PROGRAM, YOU NEED THIS BOOK! **\$11.95**

DOS PLUS OPERATING SYSTEM

A fast, easy to use, and bug-free operating system for the TRS-80 Model I and III. This system is a must for business and hobby users. Easy to use, supports Single and Double density in the Mod III, (Mod I with Doubler). Includes a \$100 reward for an error if you can locate one. (See Micro Systems Software ad for details.)

DOSPLUS 3.3S (Mod I Single Density), **\$99.95**

DOSPLUS 3.3D (Mod I Double Density, Doubler required), **\$99.95**

DOS PLUS 3.3III (Mod III Sing/Doub Density), **\$99.95**

NEWDOS/80 OPERATING SYSTEM

The Hottest Disk Operating System for the TRS-80 Model I and III. Version 2.0 with full single and double density support, allows the use of and combination of disk drives types and densities. Full Double density support when used with a Doubler. On the Model I, you can read and write Model III compatible data disks. On the Model III, you can write Model I single or double density data disks for use on the Model I. Includes: Expanded directories, dynamic basic merge and delete, selective variable clearing, enhanced basic editing, Enhanced chaining functions, Superzap utility, Disk enhanced editor assembler and disassembler, and much more. Special Price, **\$139.95**

M-ZAL

This is the most powerful Editor Assembler for the TRS-80 ever written. Features a full screen editor, a menu driven assembler, and an interactive linker which allows the linking of /CMD and /RLD files. Files can be loaded to Disk or Tape! Assembly Language programmers like Dick Balcom, and Pete Robert claim that this is the best Editor Assembler on the market! Special Price, **\$129.95**

OTHER MYSTERIES

We carry the full line of IJG 'Other Mysteries' books at discount prices. These books are a must for computer users.

TRS-80 Disk and Other Mysteries	\$22.50	\$19.95
Basic Decoded and Other Mysteries	\$29.95	\$26.96
Custom TRS-80 and Other Mysteries	\$29.95	\$26.95
Basic Faster & Better	\$29.95	\$26.95

MX-80 RIBBON RELOADS

Don't throw away your worn MX-80 ribbon cassettes. We carry endless loop ribbons to replace the worn ribbon in your MX-80 ribbon cassette and save money. Installation takes about 3 minutes each. Special offer **\$3.50/ea., \$35.00/doz.**

CASOP

The CASOP utility by Paul Spoltore allows you to copy system tapes, find load locations, check for hidden messages, modify program blocks, relocate program blocks, and merge two tape programs together. A sort of 'SUPERZAP' for tape users, **\$24.95.**

AVAILABLE AT

Breeze Computing
P.O. Box 1013
Berkley, MI 48072
(313) 288-9422

Micro Images
146-03 25th Road
Flushing, NY 11354

All Systems Go
105 W. Plant Street
Winter Garden FL 32781
(305) 877-2830

CPU Computer Corp.
175 Main Street
Charleston, MA 02129

Programs Unlimited
20 Jericho Tpke.
Jericho, NY 11753
(800) 645-6038

Son John Enterprises
P.O. Box 1671
Freemont, CA 94538
(415) 651-4147

Contemporary Comm Corp. **Stevens Radio Shack**
5582 Coral Way
Haslett, MI 48840
(517) 339-1028

562 Nutt Road
Phoenixville, PA 19460
(800) 345-6279

Soft Sector Marketing
6250 Middle Belt Road
Garden City, MI 48135
(313) 425-4020

Omni Systems Associates
P.O. Box 632
W. Caldwell, NJ 07006
(201) 226-9185

Bob's T.V.
93-15 86th Drive
Woodhaven, NY 11421
(212) 441-2807

Computer Serv. of Danbury
P.O. Box 993
Danbury, CT 06810
(203) 744-5516



**171 Hawkins Road
Centereach, New York 11720**

**(516) 981-8568 (Voice)
(516) 588-5836 (Data)
MNET-70331, 105**



Dealer Inquiries Welcome
Add \$2.00 S & H
NYS res. add appr. tax

```

780 BF(I)=BF(I-1)+CR(I)-DB(I)
790 PRINT @ 896, "TYPE <C> TO CONTINUE OR <Q> TO QUIT";
800 I$=INKEY$
810 IF I$ = "" THEN 800
820 IF I$ = "C" THEN 850
830 IF I$ = "Q" THEN 870
840 GOTO 800
850 I=I+1
860 GOTO 390
870 P1=I
880 GOTO 130
890 '
900 '....VIDEO LISTING OF TRANSACTIONS
910 '
920 CLS
930 PRINT Y$;
940 PRINT STRING$(64, 45);
950 PRINT USING W$; "INITIAL BALANCE";BF(0);
960 FOR I=1 TO P1
970 PRINT USING V$; D$(I); A$(I); CR(I); DB(I); BF(I);
980 IF I/10 = INT(I/10) THEN 1510
990 NEXT
1000 PRINT @ 960, "PRESS <ENTER> TO RETURN TO MAIN MENU";
1010 IF INKEY$ <> CHR$(13) THEN 1010 ELSE 130
1020 '
1030 '...TRANSFERRING DATA TO DISK
1040 '
1050 CLS
1060 PRINT "SAVING DATA TO DISK"
1070 PRINT STRING$(64, 131);

```

```

1080 PRINT "PRESS <ENTER> WHEN READY."
1090 IF INKEY$ <> CHR$(13) THEN 1090
1100 PRINT
1110 PRINT TAB(20) "===TRANSFERRING DATA===
1120 OPEN "0",1,"SAVINGS/DAT:0"
1130 PRINT#1, P1, BF(0)
1140 FOR I=1 TO P1
1150 PRINT#1, D$(I);",";A$(I);",";CR(I); DB(I); BF(I);
1160 NEXT
1170 CLOSE
1180 PRINT
1190 PRINT TAB(20) "===TRANSFER COMPLETE===
1200 FOR X%=1 TO 1500
1210 NEXT
1220 GOTO 130
1230 '
1240 '...TRANSFERRING DATA FROM DISK
1250 '
1260 CLS
1270 PRINT "READING DATA FROM DISK"
1280 PRINT STRING$(64, 131);
1290 PRINT "PRESS <ENTER> WHEN READY."
1300 IF INKEY$ <> CHR$(13) THEN 1300
1310 PRINT
1320 PRINT TAB(20) "===TRANSFERRING DATA===
1330 OPEN "1",1,"SAVINGS/DAT:0"
1340 INPUT#1, P1, BF(0)
1350 FOR I=1 TO P1
1360 INPUT#1, D$(I), A$(I), CR(I), DB(I), BF(I)
1370 NEXT
1380 CLOSE
1390 PRINT
1400 PRINT TAB(20) "===TRANSFER COMPLETE===
1410 FOR X%=1 TO 1500
1420 NEXT
1430 GOTO 130
1440 '
1450 '....VARIOUS SUBROUTINES LOCATED HERE
1460 '
1470 Y$=" DATE TRANSACTION TYPE CREDIT DEBIT
BALANCE"
1480 V$="% % % % $####.## $####.##
$####.##"
1490 W$=" % %"
$####.##"
1500 RETURN
1510 IF P1 = I THEN 1000 ELSE 1520
1520 PRINT @ 960, "PRESS <ENTER> TO CONTINUE LISTING";
1530 IF INKEY$ <> CHR$(13) THEN 1530
1540 PRINT @ 128, CHR$(31)"";
1550 GOTO 990
1560 CLS
1570 END

```

™TRS80 color

From the January 1981 issue of the CSRA Computer Club newsletter:

There was some amusement at the November meeting when the Radio Shack representatives stated that the software in the ROM cartridges could not be copied. This month's 68 Micro Journal reported they had disassembled the programs on ROM by covering some of the connector pins with tape. They promise details next month. Never tell a hobbyist something can't be done! This magazine seems to be the only source so far of technical informations on the TRS-80 color computer®. Devoted to SS-50 6800 and 6809 machines up to now, 68 Micro Journal plans to include the TRS-80 6809 unit in future issues.

To get the MOST from your 6809 CPU - This is the BEST SOURCE! The ONLY Magazine for the 6809 Computer. Months Ahead of All Others!

68 MICRO JOURNAL

5900 Cassandra Smith
HIXSON, TN 37343

USA

1 Yr. - \$18.50 2 Yr. - \$32.50 3 Yr. - \$48.50
*Foreign Surface Add \$12 Yr. to USA Price
Foreign Air Mail Add \$35 Yr. to USA Price
*Canada & Mexico Add \$5.50 Yr. to USA Price

Jay R. Newirth
3208 Bonnie Road
Baltimore, Maryland 21208

PRACTICAL BUSINESS PROGRAMS

S. M. Zimmerman, Ph.D. and L. M. Conrad

DEPRECIATION EXPENSE

Copyright © 1981 Zimmerman & Conrad

With our present tax structure you, the business person, must take advantage of every deduction allowed by law. One important deduction is for depreciation of capital goods. Most of us often leave the task of selecting the depreciation method to our accountants due either to lack of knowledge or to lack of time to do the calculations necessary to do the job.

Accountants are busy individuals, especially during tax season. When it is necessary for the accountant to select the most economical method of depreciation for a client the accountant must consider both the time necessary to do the calculations as well as the tax saving to the client.

Your TRS-80 is a perfect tool to perform the calculations necessary for depreciation purposes with minimum cost, maximum speed and accuracy. Your accountant will not have to do the calculations for you. You will be able to make better business decisions and your costs for accounting services should be reduced.

Don't try to eliminate your accountant completely. The laws relative to when one or the other of the available depreciation procedures may be used are complex. Laws are constantly being changed and updated. This program can aid you in reducing the effort associated with alternative calculation procedures only. It is not a replacement for an accountant.

USES AND APPLICATIONS

Most of you will need this program before the next April 15th tax deadline. It can help you save money by aiding in the selection of the best depreciation method. We have used it in almost every business in which we are involved. Whenever capital investment is required, this program has a value.

THEORY AND APPLICATION

A capital investment is a business expense for an item that will yield economic benefits over a period of time (years). The I.R.S. requires you to capitalize expenses of the type defined above. Expenses for items which are rapidly used up may be charged as an expense at the time they occur.

Examples of current expenses are grease and oil for a taxi cab, fuel for a bus, a repair on a roof and floppy disks for your computer. Examples of capital expenses are the taxi cab, the bus, a new roof and a hard disk system for your computer. From the examples we gave we hope you can see some potential problems. Some questions may occur to you. For example you may ask

when is work on a roof a repair and when is it a new roof?, or you may ask what is the difference between removable hard disks and small floppy disks?

We are not accountants nor I.R.S. agents. Only professionals trained in the field can give you good guidance to the proper answers to the above questions. Your accountant may disagree with the I.R.S. in a particular instance, this is why we have tax courts to settle issues of this type. Our program will be of no help in making decisions relative to when to capitalize and when to expense.

Once you have made the decision to capitalize a particular expense then our program is of value. There are a number of alternative legal methods of depreciation. Among these methods are the straight line approach, the declining balance procedure and the sum of the digits method. Calculations required to perform the straight line method are very simple and fast to complete.

The straight line method was the most popular method among those who had to do the calculations by hand or with a simple calculator. The trade-off was the cost of performing calculations for the declining balance procedure or the sum of the digits method versus the advantages of using these methods.

The advantage of the declining balance procedure and the sum of the digits method over the straight line approach is the business person gets the advantage of the depreciation expense earlier. Taxes are saved in the present at the expense of greater taxes in the future. The business person may either spend the saved tax money or he may reinvest the money to make more. Time value of money theory which is beyond the scope of this month's column may be used to quantify the advantage of the shift of taxes from the present to the future.

The shift of taxes to the future by the declining balance procedure and the sum of the digits method is made possible by allowing what is called accelerated depreciation expense early in the life of an asset. We have made a series of sample runs to illustrate this point.

All our sample runs assume an asset costing \$3,000 is to be depreciated over 7 years to zero salvage value. A TRS-80 computer system with two floppy disks and a printer will cost about \$3,000. We were told the I.R.S. would like to depreciate a computer over a seven year period and thus we have set up the example this way. We feel any computer will be obsolete in five years or

less but it is hard to fight city hall or Washington D.C.

Another reason for setting up the the depreciation over a seven year period is the full investment credit of 10% may be taken for our computer if the life is seven years or more. (We know the law is now being changed). Take care in reading this material: Tax laws change. What was true when we wrote this article may no longer be true when you read this article. Also note we are not accountants and our interpretation of the laws may not agree with your accountant or the I.R.S.

Once you have decided on the depreciation life, identified the first cost and estimated salvage value etc. you are ready to use the program. We will detail the steps in the computer run later, but for now lets examine the results.

In run number one for the straight line method the annual depreciation expense was \$428.57. This number did not change from year to year. The cumulative depreciation was the sum of the constant annual depreciation expense. The book value started out at \$3,000 and decreased \$428.57 per year. The ending book value is shown for each year.

In run number two we used declining balance depreciation. The first year's depreciation was \$857.14

This number is exactly twice the value of the yearly straight line depreciation. You should note by answering the question on rate a (2) we therefore specified double declining balance. Again it will be necessary for you to check with your accountant to determine when it is legal to use a rate of 2 or 1.5 or 1.25 (the available options at this time). The higher the rate the longer you are able to put off tax payments.

The third run is for the sum of the digits method. The depreciation expense starts off at \$750.00 and then decreases as in the case of the declining balance procedure. Examine the depreciation expense pattern for this alternative versus the delining balance procedure. It is a difficult choice to select from among these two alternatives.

PROGRAM OUTPUT

The objective of this program was to provide a print out of the depreciation expenses for a specified asset. It is expected the results will be used to both aid in the decision on which depreciation procedure to use and to eliminate the need for manual calculations when preparing tax reports. For those who allocate depreciation to the nearest month an allocation procedure was provided to aid in such allocation. One of our accountants used a six month rule. This procedure may be handled by our program.

PROGRAM INPUT

Required input includes identification of the asset, date of run, original cost of the asset including installation costs, salvage value, expected life of the

asset, and the technique of depreciation to be used.

RUNNING THE PROGRAM

The first item of input is the year in which the asset was purchased. The program will count years for you if you input the starting year. If you simply wish a simple counter input a (1). We have answered this question as if you purchased the asset in 1980 for the examples included in this column.

YEAR OF EXPENSE ?-

The next item of input is the first cost of the asset. We remind you the I.R.S. has specific rules on what must be included in the first cost of an item. In some cases setup and installation costs must be included. In other cases some of these expenses may be expensed. Again an accountant can advise you on what is legal and acceptable. We have assumed you purchased a TRS-80 business computer system with floppy disks and a printer for exactly \$3,000.

CAPITAL EXPENSE ?-

One of the most difficult items to estimate is the salvage value of your asset. What will you be able to sell your computer for after its legal life has been completed? With the way things have been changing in the micro-computer field this is an impossible question. You must answer it. For our example we have assumed your computer will have no value at the end of its life, i.e., a zero salvage.

In business if your estimate of salvage value is too low the difference between the actual salvage and the book value (the undepreciated value of the computer at that time) must be counted as income.

SALVAGE VALUE ?-

The next bit of information needed is the life estimate of the asset. We used years for the computer example. As already noted above we believe the real life of a computer to be less than 7 years. The 7 years was selected upon the advice of our accountant and the fact we wanted a full investment credit of 10% for the investment.

LIFE ?-

In our program you have the choice of using any one of the three depreciation methods noted above. We have selected every one of these in turn so as to illustrate the relative advantages of each of these methods. In the case of the declining balance method, at some point of time the program must switch to straight line depreciation. We have programed in an automatic switching arrangement where the computer checks to see if the depreciation as calculated by the declining balance method is greater than a straight line approach. When the value as obtained by the straight line approach becomes greater than the declining balance method the program automatically switches to straight line.

STRAIGHT LINE (1), DECLINING BALANCE (2) OR SUM OF DIGITS (3) ?-

The next item asks for the month of purchase. We are unsure of the normal I.R.S. convention relative to the allocation of depreciation for the year of purchase. Some accountants seem to take a full year's depreciation the first year no matter when during the year the asset was purchased. Some use a six months convention, i.e., take a half years depreciation the first year. Our program can do either of the above and in addition it can allocate to the nearest month which we believe is also an acceptable alternative. Check the system your accountant prefers. For our example we have used the six months convention since we have no idea when during the year our example computer was purchased.

MONTH OF PURCHASE ?-

As usual in our programs we have given the user choice of alternative output medians. In this case you may select either your printer, the CRT or both. When using the CRT controls are built into the program to allow you to page through the output if the number of years are greater than can possible fit on the CRT at one time. In order to obtain the print out of the results we selected Hard Copy (1) in our sample runs.

HARD COPY (1), CRT(2), BOTH (3) ?-

When you select hard copy you will be asked for asset identification and the date of the run. The purpose of these questions is to provide identification of the print outs you will obtain. It is useless to have answers when you have forgotten the questions.

ASSET IDENTIFICATION ?- DATE ?-

You will now obtain a print out of the depreciation schedule on both your printer and the CRT (when asking for hard copy only the CRT will not page but simply run until completed). When the regular depreciation run is complete you will be asked if you wish to have a monthly allocation run. We will assume you answered (Y).

DO YOU WISH MONTH ALLOCATION (Y/N) ?-

You will now obtain the monthly allocation run. In our example we used the six month's convention and thus obtained a six months allocation run.

```
10 REM DEPX
20 CLEAR 500
30 DIM DE(100), AL(100), W$(12)
40 W$(1)="YEAR OF EXPENSE": W$(6)="MONTH OF PURCHASE":
W$(7)="RATE"
50 W$(2)="CAPITAL EXPENSE"
60 W$(3)="SALVAGE VALUE"
70 W$(4)="LIFE"
80 W$(5)="STRAIGHT LINE (1), DECLINING BALANCE (2) OR SUM OF
DIGITS (3)"
90 W$(6)="MONTH OF PURCHASE"
100 W$(7)="RATE"
```

SCIENTIFIC SUBROUTINE LIBRARY FOR ENGINEERS, SCIENTISTS AND MATHEMATICIANS

Now available the most powerful collection of scientific subroutines ever written for microcomputers! Before now these programs were only available for large mainframe computers such as the IBM 370¹. The SSL is a library of 72 additional run-time subroutines that can be called from Microsoft's² FORTRAN-80 and are in the form of relocatable object code. In seconds these programs will perform some of the most difficult and time-consuming problems you face. For example, you can solve Eigenvalue problems, invert matrices, solve differential equations, do multiple linear regressions, and much, much more.

LIBRARY INCLUDES:

POLYLIB — A collection of 8 subroutines designed to handle polynomial operations of a very high order, including polynomial addition, subtraction, division, multiplication, evaluation, differentiation, integration, normalization, and extraction of roots, both real and complex.

FUNCLIB — A set of 10 subroutines to compute the value of a series expansion in some special polynomial, the value of a special polynomial or special function, such as the gamma function.

MATLIB — A collection of 13 very powerful matrix-handling subroutines which can be used individually or can be linked together to form program modules to perform successive matrix operations. These subroutines all use Variable Array Dimensioning.

CALCLIB — A collection of 7 subroutines designed to integrate, differentiate, and solve both single and systems of differential equations. The differential equations programs use the Fourth-Order RUNGE-KUTTA method.

STATLIB — A set of 26 different subroutines to calculate many statistical properties of various data sets. While most of the programs can be used individually, several can be called in order to perform very sophisticated analyses, such as multiple linear regressions and polynomial regressions.

MISCLIB — A collection of 8 subroutines to calculate various results, including Fourier analysis, Fourier transforms, least squares fits, and the solving of nonlinear equations.

PADD	PSUB	PMPY	PDIV	PVAL	POER	PINT	POLRT	HEP
HEPS	LEP	LEPS	GMMMA	BESJ	BESY	BESK	IO	INUE
GMADD	GMSUB	GMPRD	GMTRA	SADD	SSUB	SMPY	SDIV	MFUN
SIMQ	MINV	EIGEN	MSTR	DGR3	QTFG	QG2	QG10	RK1
RK2	RKGS	TALLY	BOUND	ABSENT	CORRE	ORDER	MULTR	GDATA
AVDAT	AVCAL	MEANO	AUTO	CROSS	SMO	EXSMO	CHISQ	QTEST
RANK	MOMENT	TTEST	GAUSS	BDTR	CDTR	NDTRI	DLGAM	RAND
NDTR	RTNI	FMFP	SE13	APLL	APFS	FORIF	FORIT	FFT

DOCUMENTATION: Each diskette comes with 103 pages of documentation containing calling conventions, parameters, notes, examples, appendices and index.

PROVEN EXPERIENCE: The SSL is now being used daily in jet propulsion labs, private engineering and consulting firms, major universities and medical schools, government agencies and Fortune 500 corporations.

MINIMUM SYSTEM REQUIRED: TRS-80³ Model I 32K User-RAM, 1 disk drive, FORTRAN

TO ORDER: Send check or money order in the amount of \$99.95 per copy made payable to

AMERICAN COMPUTER DEVELOPMENT, INC.

1735 Briarcrest Dr., Suite 200
Bryan, Texas 77801
713/775-1516 713/775-1510

Telephone orders accepted. Dealer inquiries invited. VISA and MASTER CHARGE accepted. Send card number and expiration date. Price includes shipping and handling. Immediate delivery.

¹A Trademark of the International Business Machines Corporation

²A Trademark of Microsoft Consumer Products

³A Trademark of the Tandy Corporation


```

110 W$(8)="DEPRECIATION":W$(9)="CUMULATIVE":W$(10)="BOOK
VALUE"
120 CLS
130 FOR I=1 TO 6
140 PRINT W$(I);
150 INPUT D(I): NEXT
160 IF D(5)=2 THEN PRINT W$(7): INPUT D(7)
170 S1=D(1)
180 S2=D(2)
190 INPUT "HARD COPY (1), CRT (2), BOTH (3)";D(8)
200 IF D(8)<10 AND D(8)>3 THEN 130
210 IF D(8)=1 OR D(8)=3 THEN W$(11)="ASSET IDENTIFICATION":
LPRINT " ": W$(12)="DATE ": PRINT W$(11): INPUT T$: PRINT
W$(12)," (XX/XX/XX)": INPUT DD$: LPRINT W$(11),T$: LPRINT "
": LPRINT W$(12),DD$
220 IF D(8)=1 OR D(8)=3 THEN FOR J=1 TO 7: LPRINT W$(J),D(J):
NEXT J
230 WWS="% % % % % % % %"
240 SU=0
250 I=1
260 WX$=" #####.## #####.## #####.##"
270 PRINT USING WWS;W$(1),W$(8),W$(9),W$(10)
280 IF D(8)=1 OR D(8)=3 THEN LPRINT USING
WWS;W$(1),W$(8),W$(9),W$(10)
290 IF D(5)=1 THEN 540
300 IF D(5)=3 THEN 440
310 DR=1/D(4)
320 DR=DR*D(7)
330 FOR I=1 TO D(4)
340 DX=DR*D(2)
350 SX=(D(2)-D(3))/(D(4)-I+1):IF D(3)>(D(2)-DX) THEN
DX=D(2)-D(3): SU=SU+DX: D(2)=D(2)-DX: DE(I)=DX: K%=I: GOSUB
680: D(1)=D(1)+1: NEXT I: GOTO 570
360 IF SX>DX THEN 540
370 SU=SU+DX
380 D(2)=D(2)-DX
390 DE(I)=DX
400 K%=I: GOSUB 680
410 D(1)=D(1)+1
420 NEXT I
430 GOTO 540
440 SD=(D(4)*(D(4)+1))/2
450 BV=D(2)
460 FOR I=1 TO D(4)
470 DX=((D(4)-(I-1))/SD)*(BV-D(3))
480 SU=SU+DX
490 D(2)=D(2)-DX
500 K%=I
510 DE(I)=DX
520 GOSUB 680
530 D(1)=D(1)+1: NEXT I: GOTO 570
540 DX=(D(2)-D(3))/(D(4)-I+1)
550 FOR J=I TO D(4): SU=SU+DX: D(2)=D(2)-DX: DE(J)=DX: K%=J:
GOSUB 680
560 D(1)=D(1)+1: NEXT J
570 INPUT "DO YOU WISH MONTHLY ALLOCATION (Y OR N)";Y$: IF
Y$="N" THEN END
580 IF Y$<>"Y" THEN 570
590 IF D(8)=1 OR D(8)=3 THEN LPRINT " ": LPRINT "MONTHLY

```

```

ALLOCATION ": LPRINT " ": LPRINT USING
WWS;W$(1),W$(8),W$(9),W$(10)
600 P=(12-D(6))/12: P2=1-P: AL(1)=P*DE(1)
610 FOR I=1 TO D(4): AL(I+1)=DE(I)*P2+DE(I+1)*P: NEXT I :
D(1)=S1: D(2)=S2: SU=0
620 FOR I=1 TO D(4)+1: DX=AL(I): SU=SU+AL(I): D(2)=D(2)-AL(I)
630 K%=I
640 GOSUB 680
650 D(1)=D(1)+1
660 NEXT I
670 END
680 PRINT USING WWS;D(1),DX,SU,D(2):X%=K%/15
690 X%=X%*15
700 IF K%=X% THEN INPUT "HIT RETURN TO PAGE";G$
710 IF D(8)=1 OR D(8)=3 THEN LPRINT USING WWS;D(1),DX,SU,D(2)
720 RETURN

```

SUMMARY

This program will provide you with a means to simplify your calculations for budgeting, costing, and planning cash flow for your business. By taking advantage of all the benefits of projecting tax costs or expenses, you will be able to use the money to your advantage, not the I.R.S.

The use of these three different approaches to the expense of depreciation will also allow you to provide accurate and updated information to your accountant which should reduce some of the costs in that area also.

S. M. Zimmerman, Ph.D.
College of Business
University of South Alabama
Mobile, Alabama 36688

L. M. Conrad
Imagineering Concepts
P.O. Box 9843
Mobile, Alabama 36691-0843

continued from page 24

12	MOVE CARRIAGE TO TOP OF FORM (PAGE)
13	LINE FEED WITH CARRIAGE RETURN
14	TURNS ON CURSOR
15	TURNS OFF CURSOR
16-22	NONE
23	CONVERTS TO 32 CHARACTERS/LINE MODE
24	BACKSPACE CURSOR
25	ADVANCE CURSOR
26	DOWNWARD LINEFEED
27	UPWARD LINEFEED
28	CURSOR HOME
29	MOVE CURSOR TO BEGINNING OF LINE
30	ERASES TO END OF LINE
31	CLEARs TO END OF FRAME

continued on next page

FIGURE 2

CODE	KEYWORD	CODE	KEYWORD	CODE	KEYWORD	CODE	KEYWORD
129	FOR	190	FN	161	ON	222	RND
130	RESET	191	USING	162	OPEN	223	LOG
131	SET	192	VARPTR	163	FIELD	224	EXP
132	CLS	193	USR	164	GET	225	COS
131	CMD	194	ERL	165	PUT	226	SIN
134	RANDOM	195	ERR	166	CLOSE	227	TAN
135	NEXT	196	STRING\$	167	LOAD	228	ATN
136	DATA	197	INSTR	168	MERGE	229	PEEK
137	INPUT	198	POINT	169	NAME	230	CVI
138	DIM	199	TIME\$	170	KILL	231	CVS
139	READ	200	MEM	171	LSET	232	CVD
140	LET	201	INKEY\$	172	RSET	233	EOF
141	GOTO	202	THEN	173	SAVE	234	LOC
142	RUN	203	NOT	174	SYSTEM	235	LOF
143	IF	204	STEP	175	LPRINT	236	MKI\$
144	RESTORE	205	+	176	DEF	237	MKS\$
145	GOSUB	206	-	177	POKE	238	MKD\$
146	RETURN	207	*	178	PRINT	239	CINT
147	REM	208	/	179	CONT	240	CSNG
148	STOP	209	UP ARROW	180	LIST	241	CDBL
149	ELSE	210	AND	181	LLIST	242	FIX
150	TRON	211	OR	182	DELETE	243	LEN
151	TROFF	212	>	183	AUTO	244	STR\$
152	DEFSTR	213	=	184	CLEAR	245	VAL
153	DEFINT	214	<	185	CLOAD	246	ASC
154	DEFSNG	215	SGN	186	CSAVE	247	CHR\$
155	DEFDBL	216	INT	187	NEW	248	LEFT\$
156	LINE	217	ABS	188	TAB	249	RIGHT\$
157	EDIT	218	FRE	189	TO	250	MID\$
158	ERROR	219	INP				
159	RESUME	220	POS				
160	OUT	221	SQR				

Neil Fishman and Jeff Platzman
62 Parker Blvd.
Monsey, New York 10952


AUTHORIZED TRS 80® DEALER #R491



TRS-80® Color Computer With
Extended Color BASIC



26 - 1062
Model III 16K RAM
Model III, BASIC



26 - 4002
Model II, 64K

\$825.00

WE ACCEPT CHECK, MONEY ORDER, OR PHONE ORDERS WITH VISA OR MASTER CHARGE. SHIPPING COSTS WILL BE ADDED TO CHARGE ORDERS. DISK DRIVES, PRINTERS, PERIPHERALS, AND SOFTWARE - YOU NAME IT, WE'VE GOT IT. WRITE OR CALL FOR OUR COMPLETE PRICE LIST.

C & S ELECTRONICS, LTD. 32 EAST MAIN ST. MILAN, MICH. 48160
(313) 439-1508 (313) 439-1400

C & S ELECTRONICS MART IS AN AUTHORIZED TRS 80® SALES CENTER STORE #R491

CURVES, CHEMQUIZ, and CANADA MILEAGE

Gordon Speer

CURVES—SINE and COSINE

Plotting curves on the video display is easy, since the Level-II BASIC has a SET(X,Y) command that turns on a little rectangle at any set of co-ordinates from (0,0) to (127,47). That amounts to 6144 different places on the screen. These coordinates start in the upper left hand corner and go to the right and down (not from the center and in both directions, as you may have learned in math class).

I hadn't given much thought to the problem of printing graphs. The old ASR-33 Teletype that I learned on could plot point after point on the same line, if necessary; but my Centronics line printer and IBM Selectric have automatic line feeds, so the entire line must be ready for the printer when transmitted from the computer. How, then, do you plot several intertwining curves, such as these sine and cosine curves, or the famous biorhythm charts? As always, there seems to be a way if you think about it a while. I decided to start with a string variable containing a line of spaces. To insert a print character to the graph, use the LEFT\$ and RIGHT\$ functions to save the rest of the line EXCEPT the point to be plotted, where the character is inserted. There is no limit to the number of characters that can be inserted this way. Of course, if two characters happen to be plotted in the same spot, the last one to be inserted is the one that will be printed.

```
100 'CURVES: SINE AND COSINE
110 INPUT "VIDEO DISPLAY=1, PRINTER=2";Q
120 ON Q GOTO 130 ,220
130 CLS
140 FOR A=0 TO 720 STEP 6 'TWO CYCLES, 120 STEPS
150 LET AR=A*3.14159/180 'ANGLE IN RADIANS
160 SET(A/6,23.5-SIN(AR)*10) '23.5 IS HALFWAY DOWN THE
SCREEN
170 SET(A/6,23.5-COS(AR)*10)
180 NEXT A
190 GOTO 190 'LOCK THE DISPLAY
200 '
210 '
220 CLEAR 300
230 REM PRINTER VERSION FOLLOWS:
240 FOR A=0 TO 720 STEP 6 'TWO CYCLES, 120 STEPS
250 LET AR=A*3.14159/180 'ANGLE IN RADIANS
260 LET SP=40+SIN(AR)*30 'SINE PRINT POSITION
270 LET CP=40+COS(AR)*30 'COSINE PRINT POSITION
280 LET P$=STRING$(80,32) 'STRING OF 80 SPACES
290 LET P$=LEFT$(P$,SP-1)+"S"+RIGHT$(P$,80-SP)
300 LET P$=LEFT$(P$,CP-1)+"C"+RIGHT$(P$,80-CP)
310 LPRINT P$
320 NEXT A
```

CHEMQUIZ

At this time of year there are millions of high school and college students studying chemistry, and learning how all those anions and cations get together to form inorganic compounds. The rules are pretty simple. Positive cations are metals which have lost electrons, negative anions are non-metals which have gained electrons, and compounds are formed when enough of each have combined to give a total charge of zero. Subscripts are used to indicate how many of each ion are present, and the subscript is omitted if there is only one ion.

This program generates compounds at random, displays either the name or formula on the video display, and won't give you another name or formula until you correctly identify the one displayed. You can easily add more ions to the DATA statements, and you might even teach the program to count how many compounds you have named or typed the formulas of. I thought it might be difficult to print the subscripts one line below the formulas. As it turned out, there wasn't much to it. Line 1090 determines if the character is a numeral, and line 1110 prints it down one line.

```
100 'CHEMQUIZ requires lower-case letters
110 CLEAR 2000
120 DIM CN$(40),CS$(40),CV(40),AN$(40),AS$(40),AV(40)
130 'cation and anion names, symbols, and valences
140 DATA sodium,Na,1,ammonium,NH4,1,copper(II),Cu,2
150 DATA magnesium,Mg,2,iron(III),Fe,3,aluminum,Al,3
160 DATA chloride,Cl,-1,sulfate,SO4,-2,oxide,O,-2
170 DATA phosphate,PO4,-3,nitrate,NO3,-1,silver,Ag,1
180 DATA potassium,K,1,chlorate,ClO3,-1,sulfide,S,-2
190 DATA 0,0,0
200 CLS
210 PRINT," C H E M Q U I Z
220 READ N$,S$,V 'name, symbol, valence
230 PRINT @ 8*RND(110)+64,S$;
240 PRINT @ 8*RND(110)+64,N$;
250 ON SGN(V)+2 GOTO 300 ,340 ,260
260 'cations
270 LET C=C+1 'counts the cations as stored
280 LET CN$(C)=N$:CS$(C)=S$:CV(C)=V
290 GOTO 220
300 'anions
310 LET A=A+1 'counts the anions
320 LET AN$(A)=N$:AS$(A)=S$:AV(A)=V
330 GOTO 220
340 'program mode
350 FOR ZZ=1 TO 5000:NEXT
360 CLS:PRINT CHR$(23)
370 INPUT"Formulas or Names (f/n)";Q$
```



```

380 IF Q$="f" THEN 530
390 IF Q$ <> "n" THEN 370
400 'generate random names - ask for formulas
410 GOSUB 700
420 PRINT @ 330,CN$(X); " ";AN$(Y)
430 LET P=660
440 GOSUB 770 'generate the correct formula
450 'key-in the name and check it one character at a time
460 FOR J=1 TO LEN(F$)
470 LET P$=INKEY$:IF P$="" THEN 470
480 IF P$ <> MID$(F$,J,1) THEN 470
490 GOSUB 1070
500 NEXT J
510 FOR ZZ=1 TO 1000:NEXT 'DELAY
520 GOTO 410
530 'generate random formulas - ask for names
540 GOSUB 700
550 GOSUB 770 'generate the formula to print
560 LET P=340
570 FOR J=1 TO LEN(F$)
580 LET P$=MID$(F$,J,1)
590 GOSUB 1070
600 NEXT J
610 PRINT @ 650,;
620 LET N$=CN$(X)+" "+AN$(Y)
630 FOR J=1 TO LEN(N$)
640 LET P$=INKEY$:IF P$="" THEN 640
650 IF P$ <> MID$(N$,J,1) THEN 640
660 PRINT P$;
670 NEXT J
680 FOR ZZ=1 TO 1000:NEXT
690 GOTO 540
700 'subroutine to choose ions at random
710 CLS:PRINT CHR$(23)
720 LET X=RND(C):Y=RND(A)
730 IF X=XX THEN 720
740 IF Y=YY THEN 720 'prevents repeats
750 LET XX=X:YY=Y 'save for comparison
760 RETURN
770 'subroutine to generate formulas
780 LET L$=CS$(X):R$=AS$(Y) 'left and right halves
790 LET L=ABS(AV(Y)):R=CV(X) 'subscripts (exchanged valence)
800 IF L=R THEN L=1:R=1
810 IF L/2=INT(L/2) AND R/2=INT(R/2) THEN L=L/2:R=R/2
820 'count capital letters in ion formulas
830 IF L=1 THEN 900
840 K=0 'capital counter
850 FOR J=1 TO LEN(L$)
860 IF ABS(ASC(MID$(L$,J,1))-77.5) > 13 THEN 880
870 LET K=K+1
880 NEXT J
890 IF K > 1 THEN L$ = "("+L$+"")
900 IF R=1 THEN 970
910 K=0
920 FOR J=1 TO LEN(R$)
930 IF ABS(ASC(MID$(R$,J,1))-77.5) > 13 THEN 950
940 LET K=K+1

```

continued on page 58

ST80-III The Ultimate Communications Package:

Price \$150.00

This is our top of the line communication package. Full disk support including DOS commands have been implemented. ST80-III™ has been on the market for over two years and has become the standard in TRS-80™ communication. This package has been used in a wide variety of applications including use with:

Addressomultigraph, Compugraphics, Spectrometers, and a wide range of Time-sharing computers.

IBM	CDC	ITEL	Honeywell
DEC	WANG	Prime	Data General
Amdhal	RCA	XEROX	GE
Apple	Heath	Northstar	Altos
Superbrain	PET	Cromemco	HP 2000

The package includes the ST80-III™ smart terminal program and nine other communication utilities: Fully documented with easy to follow instructions, ST80-III™ is by far the best terminal product on the market today. Features:

- 1) User configurable communication tables
- 2) Auto Logon
- 3) Last line repeat
- 4) Formatted video (Page, Scroll & Formatted)
- 5) Direct cursor addressing
- 6) File transfer from disk or to disk
- 7) Printer support
- 8) Echo, Feedback & Veriprompt™ verifies data transmitted
- 9) 110 to 9600 BAUD support
- 10) Remote control of Memory open & close, Printer on & off, Video on & off & auto logon
- 11) Help display
- 12) User definable function keys

Host Communications:

Price \$ 50.00

This program is by far the best HOST program you can buy. It supports the PRINT @ statement for the remote TRS-80™ running any of the ST80™ smart terminal programs. All of the ST80-III™ advanced functions are supported by host allowing easy access via BASIC, Fortran and machine language programs. Host features include:

- 1) User defined RS-232 port addressing
- 2) Definable BAUD rates from 110 to 9600
- 3) Definable break (yes/no)
- 4) Allow line feeds
- 5) Commands:
 - a) Turn on RTS (request to send),
 - b) Turn off RTS,
 - c) Receive data only from terminal,
 - d) Receive data only from host,
 - e) Send data only to host,
 - f) Send data only to terminal,
 - g) Operate in dumb terminal mode,
 - h) Operate in ST80™ mode,
 - i) Check CTS status. (clear to send)

This is a self relocating subroutine that can load anywhere in high memory.

Communications hardware available



SMALL BUSINESS
SYSTEMS GROUP, INC.
6 Carlisle Road
Westford, MA 01886
(617) 692-3800

SCREEN WRITER

Video Masthead Generation Program

Joseph Rosenman

The SCREEN WRITER program will access a screen image and create a Load Module to re-display that image from the DOS. More specifically, the program allows the user to create a screen image using BASIC PRINT statements, then creates a /CMD file that will re-create the video display. This permits the creation of a "masthead" to be displayed upon system initialization, or to be strategically displayed during the execution of a "Chain" file. This article will be divided into two parts: a "Users Guide", and a "Technical Explanation" section. The program is designed to run under standard Disk Basic. The /CMD file generated will run under any TRSDOS compatible DOS.

USERS GUIDE

The first step in running this program is the setting up of the PRINT statements at the end of the program. This is all ways done at BASIC COMMAND level, not under program control. There is a sample print sequence all ready provided. You might want to use or modify this example, or replace it with an entirely new series of prints. There can be as many as 14 lines accomadated. Make sure that your PRINTs are followed by a RETURN statement. The reason I didn't design the program to accept lines under program control is that it is not possible to enter graphic (or other special) characters directly. While the method employed (that of editing print statements into the source code) is awkward, I feel it is the easiest and most direct way to get the best results. Furthermore, almost every TRS-80 user is familiar with BASIC to some degree. Therefore, no potential user of SCREEN WRITER need learn a special protocol or symbolic representation.

The PRINT line itself can cause a display of upto 64 characters (the CRT limit). Any ASCII character that can be displayed is legal. By using the STRING\$ and CHR\$ functions, it is possible to create a graphic block "box" around text. That is exactly what my example does. By selecting different graphic block codes, different boxes can be created. A very common problem is the miscounting of column locations when formating the line. Several aborted runs will usually be required in order to satisfactorily create a masthead. In other words, the borders of the image won't line up correctly unless the character counts for each line correspond with each other. What this means is that you can format the first fourteen lines of the CRT screen any way you like, then redisplay that screen image via a single DOS command.

The program will require a name for the /CMD file

created. The entire filespec should be used. For example, TITLE/CMD:1 is a name I often use. The extension should be /CMD so the DOS knows that the file is a Load Module. The program can save to any available drive. The Load address is a little more complex. The program needs a place in memory to execute. The default address is 7000H. In fact, the program can be located anywhere in memory from 5200H to F000H. You can specify the load address either in decimal or in hexadecimal. If you are using hexadecimal, make sure you follow the number by an "H" (as in the notation used above). DO NOT precede the number by a leading 0 (i.e., use BC00H, not 0BC00H).

The program will terminate upon completion of the disk write. If you want to write a new masthead, or create the same masthead at a different location, re-run the program. Be advised that there is a long initialization required before the program is ready to interact, so be patient. One final note: if you include PRINTs for 10 lines, and tell the program that there are only 8 lines, the last 2 lines will be IGNORED. If you include 8 PRINTs and tell the program that there are 10 lines, there will be two blank lines included. If you select a masthead that is 14 lines in size, the top line will scroll off the CRT when you return to DOS READY (this won't happen when the masthead is 13 line or less in size). The only way to save the "Source" for the masthead is to save the entire SCREEN WRITER program with the new PRINTs. One final alternative exists. The source code could be saved in ASCII format (using the "A" option during a BASIC SAVE). Then, different "end" sections could be MERGED onto the "Processing body" of the program. If you must save disk space, this approach will save space when different masthead patterns are required, but will necessitate manual file MERGES prior to every run.

TECHNICAL REFERENCE

This program needs to perform several fairly sophisticated operations in order to work. The lack of accurate information as to the construction of the Load Modules nearly made this program an impossibility. Fortunately, after "tearing apart" other correct Load Modules I finally figured this mess out (I'll bet that I got some error messages that most of you never knew existed!). Along with the machine instructions, there are special "Loader Codes" that must be generated in order to make the module "readable". The DATA statements at line 1310 provide the raw machine language code needed to move the "saved" screen image to the video display, and to reset the cursor. The code is read into the "S" array.

TRS-80 OWNERS REJOICE!

Our professional quality software development tools let you program your TRS-80 with more ease and power than you ever imagined possible. Programming will become a pleasure when you use our full screen editors. These editors are not just patched up word processors. They have been specially designed to enhance the BASIC and ASSEMBLER programming languages. Our assemblers provide full screen option menus to relieve you of the burden of remembering command names. Combine user oriented features like this with the finest and most extensive documentation in the industry and you will see why programming a TRS-80 is now better than ever.

T-ZAL: TAPE BASED ASSEMBLER: Assemble to memory or tape. Create relocatable SYSTEM tapes! Includes relocating LOADER pgm. 8 character symbols with XREF. Upgrades to disk when you do!
Mod 3 Cat # 1250-20 \$ 49.95

FULL SCREEN PROGRAM TEXT EDITORS: All CAU full screen editors support four way cursor motion and scrolling with user selectable auto repeat and scroll speeds. Totally visual character insert, delete, and change. Block move, copy, delete. Global find and change. Editor for BASIC also provides automatic line renumbering and 26 user-definable macro keys.

For Tape and Disk BASIC:
Mod 1 Cat # 1010-20 \$24.95
Mod 3 Cat # 1210-20 \$29.95

For Mod 1 EDTASM source files:
Tape Cat # 1010-30 \$24.95
Disk Cat # 1010-31 \$34.95
(Disk version shipped on tape.)

M-ZAL: DISK EDITOR/ASSEMBLER: Modular Assembler Language development system includes full screen text editor, multi-pass assembler, and object module linker. Allows 8 character symbols and source file chaining/nesting with *INCLUDE cmd. Full support for relocation and global symbols. Symbol table with cross reference. Req. 32K Disk system.

Mod 1 Cat # 1050-10 \$149.00
Mod 3 Cat # 1250-10 \$149.00

XBUG: DEBUGGING TOOL & MONITOR: Display/Modify memory and regs. Set up to 10 invisible and transparent breakpoints. Multi-speed single step. Load/Copy/Create SYSTEM tapes. Uses only 2.5K and can be dynamically relocated to any address.
Mod 1 Cat # 1020-10 \$19.95
Mod 3 Cat # 1220-10 \$19.95

Note: these products are not available for level 1 machines.

When ordering specify Model, RAM size, # of disks.

Send check, money order, or MC/VISA numbers and expiration date to:
Computer Applications Unlimited
P.O. Box 214, Dept. EEW
Rye, New York 10580

N.Y. State residents add applicable sales tax. Allow 4-6 weeks for delivery. Dealer Inquiries Invited.



**COMPUTER
APPLICATIONS
UNLIMITED** TM

A Div. of CAU, Inc.

Quality • Reliability • Service

*TRS-80 is a TM of Tandy Corp

Included in this code are some of the "Loader codes" mentioned. Specifically, the first four numbers form the loader code: 01 1B 00 70 which means "Load (01) the next 27 bytes (1B) into address 7000H (00 70)." These 27 bytes are the machine code instructions used to display the masthead, reproduced below.

```

00100 ; ASSEMBLY LANGUAGE LISTING OF MACHINE
CODE GENERATED
00110 ; BY THE "SCWRITER" PROGRAM.
00120 ; THIS CODE ASSUMES THE DEFAULT LOAD
ADDRESS 7000H
00130 ; AND A PROGRAM SIZE OF 8 LINES.
00140 ;
7000 00150      ORG      7000H
7000 CDC901 00160 SCWRIT CALL 01C9H      ; CLEAR
SCREEN
7003 211D70 00170      LD      HL,701DH      ;
BEGINNING OF SCREEN BUF
7006 11003C 00180      LD      DE,3C00H      ; START
OF VIDEO
7009 010002 00190      LD      BC,0200H      ; BYTE
COUNT FOR 8 LINES
700C EDB0 00200      LDIR      ;
RESTORE VIDEO IMAGE
700E 212140 00210      LD      HL,4021H      ;
CURSOR MSB LOCATION

```

```

7011 363E 00220      LD      (HL),3EH      ; SAVE
MSB OF CURSOR LOC
7013 2B 00230      DEC      HL      ; POINT
TO CURSOR LSB
7014 3600 00240      LD      (HL),00H      ; SAVE
LSB OF CURSOR LOC
7016 C32D40 00250      JP      402DH      ;
NORMAL RETURN TO DOS
0080 00260 VIDBUF DEFS 128      ; SPACE
FOR LINES 1 & 2
0080 00270      DEFS 128      ;
LINES 3 & 4
0080 00280      DEFS 128      ;
LINES 5 & 6
0080 00290      DEFS 128      ;
LINES 7 & 8
7000 00300      END      SCWRIT
00000 TOTAL ERRORS
SCWRIT 7000 00160 00300
VIDBUF 7019 00260

```

Note that the above assembly includes the machine code.

The organization of information in the S array is as follows:

JOB COSTING SYSTEM PLUS

\$ 199.00

MODEL II, 64K, Printer and 1 to 3 Drives.

PRINTS JOB COST SHEET, JOB TICKET, COST LISTS, AGEING SUMMARY, CUSTOMER LISTS, MAILING LABELS, CUSTOMER LISTS OR LABELS BY AGEING STATUS. OPTIONAL FINANCE CHARGE APPLICATION, SIMPLE ORDER CHANGING, MULTI-COST UPDATING & MORE.

1 Drive = 500 Customers 2000 Jobs 20,000 Cost Items 11 Mark Up Codes
2 - 3 Drives Will Increase Capacity.

ACCOUNTS RECEIVABLE PACKAGE

\$39.95

MODEL I, 32K, Printer and 2 to 4 Drives.

This program prints Invoices, Statements, Ageing Summary, GL Report, Client Payment & Sales History For 2 Years, Status Report, Transaction Report, Client Lists and Client Lists By Ageing Status.

2 Drives = 300 Transactions/month 200 Accounts. 3-4 Drives Increase Capacity.

***** WITH EVERY ORDER SPECIFY THE NUMBER OF DRIVES YOU WILL BE USING *****

We specialize in custom programming !



Computer Systems

2901 FINLEY RD. SUITE 107 - DOWNERS GROVE, IL. 60515

For further information (312) 627 -8400

JNL COMPUTER SYSTEMS ACCEPTS VISA AND MASTER CARD.

S(0-3)	01 1B 00 70	- Load Module, 1B bytes,	
		Load at 7000H	1,27,0,112
S(4-6)	CD C9 01	- CALL 01C9H	205,201,1
S(7-9)	21 1D 01	- LD HL,701DH	33,29,1
S(10-12)	11 00 3C	- LD DE,3C00H	17,0,60
S(13-15)	01 00 02	- LH BC,0200H	1,0,2
S(16-17)	ED 00	- LDIR	237,176
S(18-20)	21 21 40	- LD HL,4021H	33,33,64
S(21-22)	36 3E	- LD (HL),3EH	54,62
S(23)	2B	- DEC HL	43
S(24-25)	36 00	- LD (HL),00H	54,0
S(26-28)	C3 2D 40	- JP 402DH	195,45,64

The values given above will not all ways be those required. Specifically, the value loaded into BC in line 190 of the assembly will change depending on the number of lines, as well as the source address loaded into HL in line 170. The cursor location must also change depending on the size of the display (in lines 220 and 240). In addition, all the Loader addresses must reflect the actual origin of the program load module. The video image is stored as 64 byte blocks (that is, one line per block). This is not the most efficient way of creating the Load Module, but it insures the maximum flexibility. The DATA PROCESS routines (at line 770) update the information in the "S" array to reflect different masthead

sizes and different load addresses. If the load address is given in hexadecimal, the program will branch to a HEX to DEC conversion subroutine (line 1180). First the machine language block is written to the disk file, then the screen lines are written. Each block requires its own Loader codes. Finally, the END OF FILE loader codes are written, and the program terminates. Each Block begins with a 01, followed by a byte count then a 2 byte load address. The EOF block is a 2 byte code 0202 followed by the "transfer address" (the address to begin execution). In the case of SCREEN WRITER generated modules, this address is the same as the initial load address.

The S array is modified as follows:

- S(2-3) : The initial load address of the module.
- S(8-9) : The address of the screen buffer.
- S(14-15) : The size of the screen module in bytes.
- S(22,25) : MSB and LSB of the cursor reset address.

Joseph Rosenman
35-91 161 Street
Flushing, NY 11358

SALARY RATE CHARTS

Frank P. Vlamings

This program charts an annual salary or income into monthly, bi-monthly, weekly, daily, and hourly proportions. There is a complete video display for the results and/or hard copy for each option chosen.

I have used a Centronics Model 702 printer in writing this program. For printers that are not equipped to print in bold letter headings, line 510 in the program should be revised to delete the "CHR\$(14)".

The maximum annual income that may be used in this program is \$999,999.99 for the video display and \$9,999,999.99 for the hard copy.

```
10 CLEAR 200:L$=STRING$(73,61): F$=STRING$(55,61)
20 CLS
30 PRINT"THIS PROGRAM BREAKS DOWN AN ANNUAL SALARY INTO:"
40 PRINT" A. MONTHLY RATE (+BI-MONTHLY ON PRINT-OUT ONLY!)"
50 PRINT" B. WEEKLY RATE"
60 PRINT" C. DAILY RATE"
70 PRINT" D. HOURLY RATE"
80 PRINT:PRINT
90 PRINT"ALL COMPUTATIONS ARE BASED FROM ANNUAL INCOME....."
100 PRINT:PRINT
110 PRINT"ENABLE PRINTER FOR PRINT-OUT....."
120 PRINT
```

```
130 PRINT: INPUT"ENTER: (1) FOR VIDEO DISPLAY
(2) FOR PRINT-OUT";A
140 IF A<1 OR A>2 THEN 20
150 IF A=2 THEN 330
160 C=0:CLS: INPUT"STARTING ANNUAL SALARY RATE";V:PRINT
170 INPUT "HIGHEST ANNUAL SALARY RATE";W:PRINT
180 INPUT "SALARY STEP RATE";Z
190 IF W<V, OR V>W OR Z>W THEN 160
200 GOSUB 630
210 FOR Y=V TO W STEP Z
220 IF C<10 GOTO 240
230 INPUT"PRESS <ENTER> TO CONTINUE...";X$:C=0: GOSUB 630
240 M=Y/12:W=Y/52:D=Y/260:H=Y/2080
250 PRINTTAB(0)USING"#####.##";Y;
260 PRINTTAB(12)USING"#####.##";M;
270 PRINTTAB(24)USING"#####.##";W;
280 PRINTTAB(36)USING"#####.##";D;
290 PRINTTAB(48)USING"#####.##";H
300 C=C+1: NEXT Y
310 PRINT:INPUT"DO YOU WISH TO START AGAIN (Y/N)";R$
320 IF R$="Y" THEN 10 ELSE END
330 CLS
340 INPUT"STARTING ANNUAL SALARY RATE";V
```

continued on page 60

CONVERT YOUR SERIAL PRINTER TO PARALLEL

NEW MODEL UPI-3 SERIAL PRINTER INTERFACE MAKES IT POSSIBLE TO CONNECT AN ASCII SERIAL PRINTER TO THE PARALLEL PRINTER PORT ON THE TRS-80.

Software compatibility problems are totally eliminated because the TRS-80 "THINKS" that it has a parallel printer attached. NO MACHINE LANGUAGE DRIVER NEEDS TO BE LOADED INTO HIGH MEMORY BECAUSE THE DRIVER ROUTINE FOR THE UPI-3 IS ALREADY IN THE TRS80 ROM! SCRIPSIT, PENCIL, RSM 2, ST80D, NEWDOS, FORTRAN, BASIC etc. all work as if a parallel printer was in use.


The UPI-3 is completely self contained and ready to use. A 34 conductor edge card connector plugs onto the parallel printer port of the model I Expansion Interface or onto the parallel printer port on the TRS-80 III. A DB25 socket mates with the cable from your serial printer. The UPI-3 converts the parallel output of the TRS-80 printer port into serial data in both the RS232-C and 20 MA. loop formats.



SPEEDWAY ELECTRONICS
Division of Binary Devices
11560 TIMBERLAKE LANE
NOBLESVILLE, IN 46060
(317) 842-5020

TRS 80 is a trademark of Tandy

VISA MasterCard

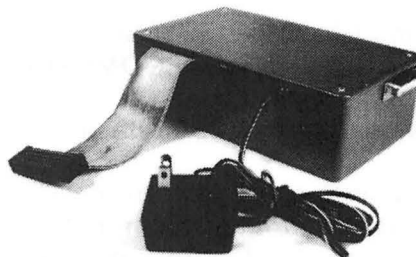

Switch selectable options include:

- Linefeed after Carriage Return
- Handshake polarity (RS232-C)
- Nulls after Carriage Return
- 7 or 8 Data Bits per word
- 1 or 2 Stop Bits per Word
- Parity or No parity
- ODD or EVEN Parity

**NOW
AVAILABLE
FOR
MODEL II**

UPI-2 for TRS80 Model II	\$149.95
UPI-3 for TRS80 Model I or 3	\$149.95
UPI-4 for use with Model 1 and RS Printer Interface Cable (no expansion interface required)	\$159.95
Manual only (may be applied to order)	\$ 5.00
Ten day return privilege — 90 day warranty	
Shipping and Handling on all orders	\$ 4.00
Specify BAUD rate 50-9600 BAUD	

VOL. 4 - DISASSEMBLED HANDBOOK FOR TRS-80

Robert M. Richardson

CHAPTER 8

ASCII RADIO TELETYPE TRANSMIT PROGRAM

INTRODUCTION

ASCII code is the native language of our marvelous Model I and Model III TRS-80. No code conversions to Baudot or Morse are necessary to translate the language.— hurray. All the program need do is to create its own parallel to serial, and vice versa UART (universal-asynchronous-imagiver-transmitter), and we are OFF AND RUNNING.

In this Chapter, and Chapters 9 and 10, we will write a program that does all these good things for us, plus transmit the prepared messages AND input message we did in previous Chapters, BUT without the code conversion that was previously required. Since we will be transmitting and receiving on the amateur radio bands, we will ignore the 8th bit of the ASCII code and use the American Radio Relay League's bulletin station in Newington, Connecticut, W1AW, as our standard. Also, we will be using 170 cycle per second FREQUENCY SHIFT KEYING, as we did in the last 3 Chapters on Baudot teletype, since that is what W1AW now uses and it is most convenient to have a daily source of test signals (and something of interest to copy). THE PROGRAMS MAY BE EASILY MODIFIED FOR 300 BAUD.

This Chapter, and Chapters 9 & 10 are written for a Baud rate of 110 TO ENSURE COMPATABILITY WITH HIGH QUALITY TU's.

WHY NOT 110 BAUD "AND" 300 BAUD, COACH ? ? ?

Another good question, Gridley. You will surely recall that Baud rate and bandwidth required for transmitting a given Baud rate, are relatively proportional. As the Baud rate increases, information bits transmitted per second goes up, the bandwidth required to carry this information also increases, AND the bandwidth of the limiter/amplifiers and discriminator circuit in the receiving system must all increase proportionally.

After testing a goodly number of radio teletype terminal units, TU's, including many homebrew units, we found the Flesher TU-170 factory assembled and tested unit, the most cost-effective TU on the market, bar none. Its receiving discriminator circuit is (bandwidth) optimized for 60 to 100 WPM Baudot equivalent speed (therefore REJECTING other out of band signals), and since 300 Baud

ASCII RTTY requires well over 300% more bandwidth, it MUST BE modified to accomodate 300 Baud ASCII.

SOUNDS LIKE A BIG DEAL TO ME TO WORK BOTH 110 & 300 BAUD:

Not really, Gridley. It only involves switching 3 resistors and 2 capacitors in or out the the circuit to allow 300 Baud ASCII reception along with the normal 60, 66, 75, & 100 WPM Baudot and 110 Baud ASCII RTTY. See APPENDIX 7 for details.

EXPANDED PROGRAM COMMENTARY

Let's run through the program briefly.

WHY ? ? ? I UNDERSTOOD THE BAUDOT PROGRAMS PERFECTLY ? ? ?

Yes Gridley, old friend, we know you did. Now, we are going to use the 8 bit ASCII code instead of the 5 bit Baudot code, and ALL the timing parameters will be different. If you wish, by all means skip these Chapters and write your own ASCII transmit and receive programs. It is entirely up to you. You may be excused and write them in the library. What do you want to do Gridley? The decision is yours?

HMMMM? I THINK I HAD BETTER STAY RIGHT HERE ! ! !

Stout fellow, Gridley. You will make the Dean's LIST yet.

I AM ALREADY ON THE DEAN'S LIST ! ! !

Yes, I know, Gridley.....but, I mean the good one.

Lines 160-220: Initialize the program at 29000 decimal so we will have adequate room in MEM to add the next Chapter's ASCII RECEIVE program and still stay below 32767 decimal. As such, the combined object code programs will fit very nicely into a 16K MEM Model I or Model III TRS-80. REMEMBER: The programs in Chapters 8, 9, and 10 will probably NOT fit into a 16K MEM TRS-80 along with the EDTASM as the total bytes required for the EDTASM AND the source code WITH comments will exceed the 16K MEM limit. TRS-80s with either 32K or 48K MEM available will have no problem editing and assembling these programs.

Line 230: Ensures CLS compatability between the Model I and Model III by turning OFF the Model III's clock AND most importantly turning ON its external I/O bus. For those who wish to purchase an inexpensive Model III to Model I external I/O bus adaptor rather than build the unit outlined in

Appendix 6, Design Solution, Inc. at P. O. Box 1225, Fayetteville, Arkansas 72701 (phone: (501) 521-0281), now has an excellent identical unit. Both Basic's CLS and the assembly language CALL 01C9H (CLS), disable the Model III external I/O bus, hence it MUST be turned back ON for the Model III.

Lines 240-330: First zero out our characters per line counter, SIGN3, since the program as written is set up to send an automatic carriage return every 72 characters/spaces. This is entirely optional and is included for the person on the receiving end who may be copying your signal on a 72 characters/line ASCII terminal and/or speedy line printer. We have intentionally left out the automatic line feed as most line printers that are fast enough to follow 110 Baud ASCII incorporate an internal line feed with every carriage return. Add one if you wish.

File: Disassembled HANDBOOK, Chapter 8, part 2

Line 340: Sets our data bit length for 110 Baud ASCII. The number 610 when loaded into the BC register and decremented to zero via the CALL 060H to ROM, corresponds to a time delay of very close to 9.091 milliseconds which is the data bit length for 110 Baud ASCII. ALL 110 Baud ASCII uses this pulse length for the start bit @ 2295 Hz, which is followed by the 8 data bits with 2125 Hz = Mark and 2295 Hz = space. The stop bit, always a Mark tone, may be either ONE or TWO data bits in length, but on the amateur bands we have NEVER heard a signal that did not subscribe to the TWO data bits stop length convention, including W1AW. As such, this program will transmit a stop bit TWO data bits long after the 8 data bits have been transmitted (lines 750 and 760).

HOW ARE WE GONNA TRANSMIT 300 BAUD ASCII ? ? ?

Good question, Gridley. Glad you are hanging in there. For starters let's try scaling down 110 Baud to 300 Baud. Try this formula for size. Since we are using 610 for a data bit length of 9.091 milliseconds = 110 Baud, and 300 Baud has a data bit length of 3.333 milliseconds, then:

$$\frac{610}{9.091} = \frac{X}{3.333} \quad \text{therefore } X = \text{approximately } 224$$

Program execution time must be allowed for, so a good ballpark number to start with for 300 Baud would be in the vicinity of 200 for SPEED2 in line 340. We have not been able to locate any 300 Baud ASCII stations using 190 cycle frequency-shift

keying to test this constant on, so remember it is only approximate at best and surely needs fine tuning. Also, remember to delete line 760 as ALL 300 Baud transmissions only use ONE DATA BIT LENGTH stop pulse time delay instead of 110 Baud's two.

Lines 370-790: We will return to in a moment. Let's goto line 800 where the keyboard awaits your command.

Lines 800-880: First test your keyboard input for a space = 32, and if so, then jump around around the other tests to VIDEO2 in line 930. If we consider the average word's length = 5 letters, then every 6th character must be a space. This saves a miniscule amount of time, and may be omitted if desired. Lines 830-840 return you to Basic if SHIFT B is pressed, 860-870 sends the program off to the prepared message MENU if SHIFT UP-ARROW is pressed, 870-880 set up the prepared message routine WITHOUT a CLS or MENU display. You must then input A to W for whatever message you wish (more later).

Lines 890-900: Test the CLEAR key. It is your TRANSMIT/RECEIVE toggle switch and will send you off to RECEIVE MODE in Chapter 10's program.

Lines 910-920: Check to see if any lower case ASCII characters (greater than ASCII 96) have been sent from the keyboard, and if so, ignores them by jumping back to KYBD2 in line 790.

Lines 930-940: First display the character from the keyboard, in "A" register, on the video display and then jumps off to SEND in line 370 (we finally got back there).

Lines 370-430: Save the keyboard input character in the stack via PUSH AF and then loads the characters per line counter, SIGN3 from memory, into "A", and adds 1 to it in line 390. We are presuming that the individual at the receiving end of the circuit is using a relatively FAST line printer capable of handling the speed of 110 Baud with 2 stop bits = 100 words per minute. We also presume this line printer utilizes 72 characters per line (most do), and therefore test the number of characters since a carriage return in line 410. IF 72 characters have been sent, then AUTO1 in line 1000 is called.

Lines 1000-1100 display a left arrow on the Model I or a "bracket" on the Model III, so you will know a carriage return was transmitted. Lines 1020-1030 then zero out the character counter, send a start bit, then an ASCII 13 = 00001101 binary = carriage return, and finally 2 stop bits before creating a 3 character length time delay in lines 1150 & 1160 for the mechanical carriage to return. This time delay should be adequate for most ASCII modestly fast line printers. Adjust the value in TIME7, line 740, if you wish to increase or decrease

this time delay. If ALL the stations you are working utilize bi-directional line printers, then you might as well delete or reduce this time delay. Line 1170 RETURNS the program to line 430 that POPs the former "A" register that was saved in the stack in line 370, into the "D" register.

Lines 440-550: Are the real "work horses" of this program. Line 440 zeroes out the bit counter, L register, and then sends the start bit, always a SPACE, in line 450. Lines 460-490 test the least significant bit of the "D" register and transmit a Mark if it is a 1, or a Space if it is a zero. The reason for testing the bit twice, rather than once, is to create EXACTLY equivalent time delays. This is relatively unimportant at 110 Baud data rates, but at data rates of 600 Baud and up, can become quite critical. Line 500 adds 1 to the bit counter, tests it to see if 8 bits have been sent in lines 510-520, and IF NOT moves all of the D register's bits one to the right in line 540 and then line 550 goes back to send the next bit at SEND2 in line 460. This is your own homebrew UART and it works remarkably well. It should handle data rates up to 1200 Baud quite handily with the appropriate timing constant.

Lines 750-790: Send the stop bit time delay via CALLING TIME6 twice, and then check SIGN2 to see if a prepared message is being transmitted.

IF a prepared message is NOT being transmitted, then the program falls through to line 800 which has it back to the keyboard awaiting your command. Let's follow the program from the point where you pressed SHIFT UP-ARROW and lines 860 and 870 send it off to MENU in line 1220.

Lines 1220-1640: First CLS the video display, skip a line (CARRET), and then display the MENU shown below:

PREPARED MESSAGE SUBROUTINE

CQ = A	QTH = B
CQ DX = C	CQ SS = D
QRZ = E	73 = F
RST 5X9 PLUS = G	RST 5X5 = H
QRX = I	QRM = J
QRN = K	QSY = L
QSY UP = M	QSY DOWN = N
SECTION = O	TRS-80 = P
PROGRAM HERE = Q	RIG HERE = R
RYRYRY = S	QUICK BROWN = T
HANDLE = U	INPUT MESSAGE = V & W

ENTER PREPARED MESSAGE DESIRED?

These prepared messages are virtually the same as those in Chapter 5's Baudot RRTY transmit program. Most all of them are just as applicable to

ASCII RTTY as to Baudot RTTY, with the exception of "RYRYRY." A good ASCII substitute for the RYRYRY which tests the 5 bits of Baudot would be U*U*U* which tests the first 7 bits of ASCII as U = 01010101 and * = 00101010. As this Volume is primarily about radio communications, we will skip blithely over the graphics symbols and leave the most significant bit alone (ignore it) in the next Chapter which covers the ASCII radio teletype RECEIVE program. We will wisely leave the string packers, animated graphics characters, and the like to the expert Android Nims that wrote the Leo Christopherson Program series. As a case in point, let's follow the program through what happens when we press T to send the "QUICK BROWN" prepared message.

Lines 1640-2140: First CLS. Remember, "CLS" is a dirty word for the Model III since it deactivates the external I/O bus AND starts the clock interrupts running again. As such, we will save "A" register in the stack, for safety's sake, while all this is going on. Line 1670 retore "A" from the stack, then looks for a match in lines to 2140. IF no match is found, line 2140 sends you back to the MENU once more saying in essence, "try again." The T matchup is found in lines 2060-2070 which jumps off to QUICK in line 2810 that loads the IY register with QUICK1's address. The next line, 2820, jumps the program to SEND3 in line 2870.

Lines 2870-2880: Stuffs a 1 into SIGN2's MEM location. This is the program's prepared message signpost. A 1 in SIGN2 signifies a prepared message is being transmitted and a zero in SIGN2 says "all clear, no prepared message is in the process of being sent." If you will look back at lines 770 to 780, you will note the program tests SIGN2 for the prepared message status just before letting you have at the keyboard again in line 800. IF a message is in the process of being transmitted, then line 790 sends the program off to SEND4 in line 2890 where we are now.

Lines 2890-2910: The IY register has our message's starting address in MEM in it. You will recall that both the IX and IY registers are 16 bits wide, so any address up to 65535 may be held in either or both. Actually, the IX and IY registers are each TWO 8 bit registers that may be used separately, but that's the subject of another story about Zilog's unpublished opcodes. For the time being, let's pretend they are just simple 16 bit registers and treat them as such. Line 2890 loads the contents of IY's MEM location into the A register, and line 2900 tests it for zero. Each DEFM usually is followed by a DEFB zero which is the message delimiter; i.e., to tell the subroutine in ROM at 28A7H, "you have finished the message."

Our little prepared message subroutines, work the same way. Line 2910 jumps the program ahead to KYBD3 in line 2940 IF the message has been completed. At 2940-2960, the message signpost is loaded with a zero, and then you are returned to the keyboard.

Lines 2920-2930: Add one to the IY register and then goto XMIT3 in line 810 where the character in the "A" register is finally displayed and transmitted, just the same as if it were input by the keyboard.

----- Now let's run through the "INPUT MESSAGE V & W" subroutine for those who may have skipped the earlier Chapter that covered this aspect in the Baudot radio teletype program. We will go back to line 1640 where the displayed MENU is waiting for your input from the keyboard....a V or W. If you input a W without inputting a message, the program will output:

YOU FORGOT TO INPUT A MESSAGE - YOU FORGOT TO INPUT A MESSAGE

V is used to INPUT a message and W is used to transmit the message you input. No one in his right mind wishes to transmit to the wonderful world of ham radio that he FORGOT to input a message, so let's have at the input a "V" subroutine. ----- Lines 1640-2110: Awaits our keyboard input for the letter "V". After pressing the "V", the program falls through to line 2100 where the ASCII 86 = V is subtracted from the "A" register and the Z flag set by the ComPare 86. Line 2110 jumps the program off to INPUT2 in line 3390 since the result of the compare was zero.

Line 3390: First, the HL register is loaded with the MEM address of INPUT1.

NOTE: INPUT1 is always placed at the very tail end of the program. Why so, Gridley?

S-I-L-E-N-C-E !!!

Sorry to wake you, Gridley. The reason INPUT1 is always placed at the end of the program is so that ALL remaining memory is available to the user for the INPUT message. If you have 32K MEM you will have about 16+ pages of 16 lines per page available for message input, and if you have 48K MEM you will have over 32 pages available. Now, this is a bit much, except for club secretaries who wish to transmit a really long monthly newsletter, or authors sending a Chapter to their publisher, BUT it is there and available IF you wish to use it. You will note that INPUT1 is at the very end of Chapter 10's combined ASCII radio teletype transmit and receive program, for the same reason.

Lines 3400-3540: These 15 simple lines do the entire job of stashing our input message in MEM.

The first line awaits our keyboard input. The next line tests for a backspace, and if so, jumps the program to line 3490 where 1 is subtracted from the HL register, a backspace issued to the video display, and then returns to the keyboard in line 3400.

WHAT IF YOU KEEP PRESSING BACKSPACES BEYOND THE UPPER LEFT CORNER OF THE VIDEO DISPLAY ???

Good question, Gridley. First, you will be wiping out line 3620 (1 backspace too many), then 3610 (2 more backspaces), and then 3600 (2 more backspaces), etc. Obviously, this sort of foolishness is a NO-NO. The reason we put the backspace into this subroutine was to allow you to correct for a typing error. NEVER backspace beyond the first character in the upper, left-hand side of the video display unless for some perverted reason you wish to bollix up the program. We could have obviated this error, but why waste the memory required to do so. The program will suffer those who make typing errors (we often do), but fools and idiots, NO.

ARE YOU ADDRESSING I ???

No comment, Gridley. Let's get back to work.

Lines 3430-3440: Test for a SHIFT D input = you are all done and wish to terminate the input message subroutine by jumping to DONE in line 3520. All DONE does is to stash a zero into MEM, the same as DEFB zero, at the end of the input message and then jumps the program off to KYBD2 in line 770.

Lines 3450-3480: First load the character you input from the keyboard into the proper memory location (HL), then displays it on video, adds plus one to the HL register for the NEXT memory location, and finally jumps back to INPUT3 in line 3400 where the program awaits the next character from the keyboard.

NOTE: The "input a message" subroutine DOES NOT test for illegal characters such as SHIFT E, F, G, H, etc., as does the routine after line 800. Illegal characters will be displayed, but WILL NOT BE TRANSMITTED by the program. If you wish to eliminate most of the illegal characters automatically, just add the following 2 lines:

```
03445    CP    96      ;SUBTRACT 96 SET SIGN FLAG
03446    JP    P,INPUT3 :IF A>96, GOTO INPUT3
```

REMINDER: The return to BASIC subroutine in lines 950 to 990 will work with BOTH the Model I and Model III, but to eliminate an occasional error message with the Model I, change line 990 to read:

JP 072H

text continued on page 54

Editor's note: because of space limitations, this month's program listing is being published without comments.

```

00100 ; W4UCH ASCII TELETYPE TRANSMIT PROGRAM
00110 ;
00120 ; 110 BAUD(MAY BE MODIFIED FOR 300 BAUD)
00130 ;
00140 ; COPYRIGHT (C) 1981      ASCII 1 & 2
00150 ;
00160 W4UCH EQU 29000
00170 ORG W4UCH
00180 EX AF,AF'
00190 EXX
00200 PUSH IX
00210 PUSH IY
00220 DI
00230 CALL CLS
00240 JP G02
00250 G01 CALL CARRET
00260 G02 LD A,0
00270 LD (SIGN3),A
00280 LD HL,MESS
00290 CALL 28A7H
00300 CALL CARRET
00310 LD A,0EH
00320 CALL 033H
00330 JP SEND
00340 SPEED2 DEFW 610
00350 MESS DEFM 'TRANSMIT MODE
110 BAUD'
00360 DEFB 0
00370 SEND PUSH AF
00380 LD A,(SIGN3)
00390 INC A
00400 LD (SIGN3),A
00410 CP 72
00420 CALL Z,AUTO1
00430 POP DE
00440 SEND1 LD L,0
00450 CALL SPACE.
00460 SEND2 BIT 0,D
00470 CALL NZ,MARK
00480 BIT 0,D
00490 CALL Z,SPACE
00500 INC L
00510 LD A,8
00520 CP L
00530 JP Z,FINIS1
00540 RRC D
00550 JP SEND2
00560 SPACE LD A,4
00570 OUT (0),A
00580 LD BC,(SPEED2)
00590 CALL 060H
00600 RET
00610 MARK LD A,0
00620 OUT (0),A

```

```

00630 LD BC,(SPEED2)
00640 CALL 060H
00650 RET
00660 CARRET LD A,13
00670 CALL 033H
00680 RET
00690 TIME6 LD A,0
00700 OUT (0),A
00710 LD BC,(SPEED2)
00720 CALL 060H
00730 RET
00740 TIME7 DEFW 18000
00750 FINIS1 CALL TIME6
00760 CALL TIME6
00770 KYBD2 LD A,(SIGN2)
00780 CP 1
00790 JP Z,SEND4
00800 CALL 049H
00810 XMIT3 CP 32
00820 JP Z,VIDEO2
00830 CP 98
00840 JP Z,BASIC
00850 CP 27
00860 JP Z,MENU
00870 CP 91
00880 JP Z,SEND5
00890 CP 31
00900 JP Z,G02
00910 CP 96
00920 JP P,KYBD2
00930 VIDEO2 CALL 033H
00940 JP SEND
00950 BASIC EX AF,AF'
00960 EXX
00970 POP IY
00980 POP IX
00990 JP 1A19H
01000 AUTO1 LD A,93
01010 CALL 033H
01020 LD A,0
01030 LD (SIGN3),A
01040 CALL SPACE
01050 CALL SPACE
01060 CALL MARK
01070 CALL SPACE
01080 CALL SPACE
01090 CALL MARK
01100 CALL MARK
01110 CALL MARK
01120 CALL MARK
01130 CALL MARK
01140 CALL MARK
01150 LD BC,(TIME7)
01160 CALL 060H
01170 RET
01180 SEND5 LD A,1
01190 LD (SIGN2),A
01200 CALL 049H
01210 JP SEND6

```

```

01220 MENU CALL CLS
01230 CALL CARRET
01240 LD HL,MENU1
01250 CALL 28A7H
01260 CALL CARRET
01270 CALL CARRET
01280 LD HL,MS1
01290 CALL 28A7H
01300 CALL CARRET
01310 LD HL,MS2
01320 CALL 28A7H
01330 CALL CARRET
01340 LD HL,MS3
01350 CALL 28A7H
01360 CALL CARRET
01370 LD HL,MS4
01380 CALL 28A7H
01390 CALL CARRET
01400 LD HL,MS5
01410 CALL 28A7H
01420 CALL CARRET
01430 LD HL,MS6
01440 CALL 28A7H
01450 CALL CARRET
01460 LD HL,MS7
01470 CALL 28A7H
01480 CALL CARRET
01490 LD HL,MS8
01500 CALL 28A7H
01510 CALL CARRET
01520 LD HL,MS9
01530 CALL 28A7H
01540 CALL CARRET
01550 LD HL,MS10
01560 CALL 28A7H
01570 CALL CARRET
01580 LD HL,MS10A
01590 CALL 28A7H
01600 CALL CARRET
01610 CALL CARRET
01620 LD HL,MS11
01630 CALL 28A7H
01640 CALL 049H
01650 PUSH AF
01660 CALL CLS
01670 POP AF
01680 SEND6 CP 65
01690 JP Z,CQ
01700 CP 66
01710 JP Z,QTH
01720 CP 67
01730 JP Z,CQDX
01740 CP 68
01750 JP Z,CQSS
01760 CP 69
01770 JP Z,QRZ
01780 CP 70
01790 JP Z,SEVEN3
01800 CP 71

```

01810	JP	Z,RST59	02320	DEFB	0	02870	SEND3	LD	A,1	
01820	CP	72	02330	MS9	DEFM	'	02880	LD	(SIGN2),A	
01830	JP	Z,RST55	HERE = Q			02890	SEND4	LD	A,(IY)	
01840	CP	73	02340	DEFB	0	02900	CP	0		
01850	JP	Z,QRX	02350	MS10	DEFM	'	02910	JP	Z,KYBD3	
01860	CP	74				QUICK BROWN = T'	02920	INC	IY	
01870	JP	Z,QRM	02360	DEFB	0		02930	JP	XMIT3	
01880	CP	75	02370	CALL	CARRET		02940	KYBD3	LD	A,0
01890	JP	Z,QRN	02380	MS10A	DEFM	'	02950	LD	(SIGN2),A	
01900	CP	76				HANDLE = U	02960	JP	KYBD2	
01910	JP	Z,QSY				INPUT MESSAGE = V & W'	02970	CQ1	DEFM	' CQ CQ CQ DE
01920	CP	77	02390	DEFB	0		W4UCH/2	W4UCH/2	K K K	'
01930	JP	Z,QSYUP	02400	CALL	CARRET		02980	DEFB	0	
01940	CP	78	02410	MS11	DEFM	'	02990	QTH1	DEFM	'QTH IS BOX 1065 -
01950	JP	Z,QSYDN	PREPARED MESSAGE DESIRED ?			ENTER	CHAUTAUQUA LAKE, NEW YORK 14722			'
01960	CP	79	02420	DEFB	0		03000	DEFB	0	
01970	JP	Z,SECT	02430	CQ	LD	IY,CQ1	03010	CQDX1	DEFM	'CQ DX CQ DX CQ DX
01980	CP	80	02440	JP	SEND3		DE	W4UCH/2	K K K	'
01990	JP	Z,TRS80	02450	QTH	LD	IY,QTH1	03020	DEFB	0	
02000	CP	81	02460	JP	SEND3		03030	CQSS1	DEFM	'CQ SS CQ SS CQ SS
02010	JP	Z,PGMHR	02470	CQDX	LD	IY,CQDX1	DE	W4UCH/2	K K K	'
02020	CP	82	02480	JP	SEND3		03040	DEFB	0	
02030	JP	Z,RIGHR	02490	CQSS	LD	IY,CQSS1	03050	QRZ1	DEFM	'QRZ QRZ QRZ DE
02040	CP	83	02500	JP	SEND3		W4UCH/2	K K K		
02050	JP	Z,RYRY	02510	QRZ	LD	IY,QRZ1	03060	DEFB	0	
02060	CP	84	02520	JP	SEND3		03070	SVN31	DEFM	'73 TO YOU AND URS.
02070	JP	Z,QUICK	02530	SEVEN3	LD	IY,SVN31	MNY	TXN	FB	QSO. DE W4UCH/2
02080	CP	85	02540	JP	SEND3		03080	DEFB	0	
02090	JP	Z,HANDL	02550	RST59	LD	IY,RST591	03090	RST591	DEFM	'UR RST 5X9
02100	CP	86	02560	JP	SEND3		PLUS...	A WHOPPING BIG SIGNAL HERE AT		
02110	JP	Z,INPUT2	02570	RST55	LD	IY,RST551	CHAUTAUQUA LAKE			'
02120	CP	87	02580	JP	SEND3		03100	DEFB	0	
02130	JP	Z,INPUT	02590	QRX	LD	IY,QRX1	03110	RST551	DEFM	'UR RST 5X5 WITH MO
02140	JP	MENU	02600	JP	SEND3		DEST	QSB. LETS HOPE THE BAND IMPROVES.		'
02150	MENU1	DEFM	02610	QRM	LD	IY,QRM1	03120	DEFB	0	
			02620	JP	SEND3		03130	QRX1	DEFM	'QRX A MINUTE. THE
			02630	QRN	LD	IY,QRN1	PHONE. STANDBY.			'
			02640	JP	SEND3		03140	DEFB	0	
			02650	QSY	LD	IY,QSY1	03150	QRM1	DEFM	'QRM QUITE BAD.
			02660	JP	SEND3		PLEASE TRY AGAIN. DE	W4UCH/2	K K K	'
			02670	QSYUP	LD	IY,QSYUP1	03160	DEFB	0	
			02680	JP	SEND3		03170	QRN1	DEFM	'LOCAL QRN TERRIBLE.
			02690	QSYDN	LD	IY,QSYDN1	PLEASE TRY AGAIN. DE	W4UCH/2	K K K	'
			02700	JP	SEND3		03180	DEFB	0	
			02710	SECT	LD	IY,SECT1	03190	QSY1	DEFM	'QRM TERRIBLE. LETS
			02720	JP	SEND3		QSY? WHERE MOVE? DE	W4UCH/2	K K K	'
			02730	TRS80	LD	IY,TRS801	03200	DEFB	0	
			02740	JP	SEND3		03210	QSYUP1	DEFM	'LETS BOTH MOVE UP
			02750	PGMHR	LD	IY,PGMHR1	1 KHZ UP 1 KHZ? DE	W4UCH/2	K K K	'
			02760	JP	SEND3		03220	DEFB	0	
			02770	RIGHR	LD	IY,RIGHR1	03230	QSYDN1	DEFM	'LETS BOTH MOVE
			02780	JP	SEND3		DOWN 1 KHZ DOWN 1 KHZ? DE	W4UCH/2	K K K	'
			02790	RYRY	LD	IY,RYRY1	03240	DEFB	0	
			02800	JP	SEND3		03250	SECT1	DEFM	'ARRL SECTION IS
			02810	QUICK	LD	IY,QUICK1	WEST. NY - WEST. NY DE	W4UCH/2	K K K	'
			02820	JP	SEND3		03260	DEFB	0	
			02830	HANDL	LD	IY,HANDL1	03270	TRS801	DEFM	'TRS-80 MICROCOMPUTER
			02840	JP	SEND3		HERE IS DOING ALL THE WORK FOR ME.			'
			02850	INPUT	LD	IY,INPUT1				
			02860	JP	SEND3					

02160	DEFB	0			
02170	MS1	DEFM	'	CQ = A	
				QTH = B'	
02180	DEFB	0			
02190	MS2	DEFM	'	CQ DX = C	
				CQ SS = D'	
02200	DEFB	0			
02210	MS3	DEFM	'	QRZ = E	
				73 = F'	
02220	DEFB	0			
02230	MS4	DEFM	'	RST 5X9	
				RST 5X5 = H'	
02240	DEFB	0			
02250	MS5	DEFM	'	QRX = I	
				QRM = J'	
02260	DEFB	0			
02270	MS6	DEFM	'	QRN = K	
				QSY = L'	
02280	DEFB	0			
02290	MS7	DEFM	'	QSY UP = M	
				QSY DOWN = N'	
02310	MS8	DEFM	'	SECTION = O	
				TRS-80 = P'	

```

03280      DEFB      0
03290 PGMHR1  DEFM    'PROGRAM IS FROM
DISASSEMBLED HANDBOOK FOR TRS-80 VOLUME
4.'
03300      DEFB      0
03310 RIGHR1  DEFM    'RIG HR IS OLD HT-37,
ITT 3021 RECVR AND DIPOLE IN THE ATTIC. '
03320      DEFB      0
03330 RYRY1   DEFM    'RYRYRYRYRYRYRYRYRYRY
RYRYRYRYRYRYRYRYRYRYRYRYRYRYRYRYRYRY '
03340      DEFB      0
03350 QUICK1  DEFM    'THE QUICK BROWN FOX
JUMPED OVER THE LAZY DOGS. 0123456789 '
03360      DEFB      0
03370 HANDL1  DEFM    'HANDLE IS (BOB).
35 YEARS HAMMING, BUT NEW TO ASCII RTTY. '
03380      DEFB      0
03390 INPUT2  LD      HL,INPUT1
03400 INPUT3  CALL    049H
03410      CP      8
03420      JP      Z,BACK
03430      CP      100
03440      JP      Z,DONE
03450      LD      (HL),A
03460      CALL    033H
03470      INC     HL
03480      JP      INPUT3
03490 BACK    DEC     HL
03500      CALL    033H

```

```

03510      JP      INPUT3
03520 DONE    LD      A,0
03530      LD      (HL),A
03540      JP      KYBD2
03550 SIGN2   DEFB      0
03560 SIGN3   DEFB      0
03570 CLS     CALL    01C9H
03580      LD      A,0
03590      OUT     (224),A
03600      LD      A,48
03610      OUT     (236),A
03620      RET
03630 INPUT1  DEFM    'YOU FORGOT TO
INPUT A MESSAGE - YOU FORGOT TO INPUT A
MESSAGE '
03640      DEFB      0
03650      END     W4UCH

```

instead of

JP 1A19H.

CONCLUSION OF CHAPTER 8


110 Baud ASCII radio teletype is going by leaps and bounds on the amateur radio bands. Not just the popular 80, 40, 20, 15, and 10 meter short wave bands, but also on the VHF/UHF bands of 6, 2, and 3/4 meters where it is now occasionally heard. As microcomputers proliferate throughout the worldwide ranks of radio amateurs AND war surplus Baudot teletype machines give up the ghost and fade away, ASCII will EVENTUALLY become the standard, rather than the exception, which it is today.

The American Radio Relay League, ARRL, is to be commended for their leadership of the ASCII evolution, rather than revolution by transmitting the daily ARRL bulletins to radio amateurs in both Baudot AND 110 Baud ASCII. See Chapter 6, page 18 for the daily bulletin schedules and HF frequencies. The bulletins are first transmitted in Baudot 60 speed, and then repeated in 110 Baud ASCII radio teletype with 2 stop bits. Though eight data bits are transmitted, the MSB carries NO relevant information (same as this Chapter's program).

The essential aspects of the program in this Chapter are really NOTHING more than the software UART, parallel to serial conversion, accomplished in lines 440-550 and 750-760. The rest is merely icing on the ASCII cake.

THE BIGGEST NAME IN LITTLE COMPUTERS™

**TRS-80™ Model II — Your Best Buy
In a Business Microcomputer**

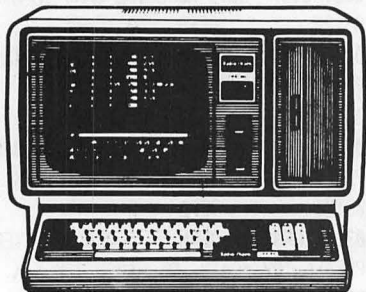

**UP
TO
15%
OFF!
on**

**TRS-80™ computers,
software and peripherals**

Similar values on all merchandise

CALL COLLECT:

915-283-2920

Van Horn Office Supply

701 W. Broadway -- P O Box 1060

Van Horn, Texas 79855

DEALER GO55

Form F48 Provided

Standard Warranty in Effect

THE NATIONWIDE SUPERMARKET OF SOUND®



MODEL III CORNER

Hubert S. Howe, Jr.

TRSDOS 1.3 ZAPS

Everyone with a TRS-80 Model III should now be using TRSDOS version 1.3, since it has been available for several months and is significantly better than the earlier versions. Nevertheless, there are still errors in version 1.3, for which Radio Shack has just issued corrections. One of these "zaps" fixes a problem with Editing in Basic, another a bug in XFERSYS, and two of them fix a problem with the LOAD command. All of these patches can be implemented by using the BUILD command to type in the following short program, which we will call PATCH:

```
PATCH BASIC/CMD (ADD=58F8,FIND=F1,CHG=00)
PATCH XFERSYS/CMD (ADD=548E,
    FIND=3500FD21,CHG=FD360001)
PATCH *6 (ADD=5850,FIND=3A62,CHG=BF5F)
PATCH *6 (ADD=5FBE,FIND=20697320616374,
    CHG=0D116544C31C44)
```

After typing in these four lines, type BREAK to exit from BUILD. The disk is patched by typing PATCH PATCH. The advantage of doing it this way is that you only have to type in the program once and can then patch all of your TRSDOS 1.3 diskettes by executing the PATCH file.

One other nice undocumented feature of TRSDOS 1.3 is a program on the diskette supplied called HERZ50/BLD. This program contains a patch for the disk if the Model III is to be used in European countries, where the electric power is 50 Hz instead of 60 Hz as it is here. If you thought that it should be executed because it was on the disk, you should "unzap" your diskette, so that it will be right for running in the United States. This can be done by executing the following patch:

```
PATCH *0 (ADD=4047,FIND=BF42,CHG=2935)
```

If you get the message "string not found" while executing any of these commands, it probably means that your disk has already been patched and doesn't need any of these fixes.

WHY NOT DOUBLE SIDED?

According to the technical information about the TRS-80 Model III's disk controller chip, which is the Western Digital FD 1793, and the Tandon disk drives used as standard by Radio Shack, there appears to be no reason why a completely double-sided system couldn't be implemented in the Model III at no

additional charge for the hardware. The FD 1793 happens to be one of the disk controllers that specifically has side indicators in its formatting, and the Tandon drives supposedly have double-sided heads, which is again a standard used by this company on all its drives.

Why didn't Radio Shack implement a double-sided system? Perhaps there are some reasons we are not aware of, affecting the reliability of operation, or perhaps not all the Model III hardware is the same. The preliminary indication is rather that RS didn't want the trouble of developing a double-sided disk operating system. How would the other side be accessed? Would it be considered another drive, or could one file be split on both sides of the diskette? Where would the directory (which would, of course, have to be larger) go? We are looking for another company, particularly one like Lifeboat Associates, to come up with a double-sided DOS that will double the capacity of the Model III disks for no extra charge!

Do you have a question about the Model III, or a program specifically for the Model III? Send it to Model III Corner, H & E Computronics, 50 North Pascack Road, Spring Valley, New York 10977. ■

computer
case
company

comp
case



• RS201

Attaché style cases for carrying and protecting a complete computer set-up. Constructed of the highest quality luggage material with saddle stitching. Will accommodate equipment in a fully operational configuration along with manuals, working papers and disks. Never a need to remove equipment from case. Simply remove lid, connect power and operate. Lid can be replaced and locked for security and protection without disconnecting cables. Fully tested.

• RS201	TRS-80 Model I, Expansion Unit & Drives ..	\$109
• RS202	TRS-80 Monitor or TV set	84
• RS204	TRS-80 Model III	129
• RS205	Radio Shack Color Computer	89
• P401	Paper Tiger 440/445/460	99
• P402	Line Printer II/IV	89
• P403	Epson MX70 or MX80	89
• P404	Epson MX100	99
• CC90	Matching Attaché Case	75

computer case company

5650 INDIAN MOUND CT. COLUMBUS, OHIO 43213 (614) 868-9464



QUESTIONS AND ANSWERS

Conducted by Hubert S. Howe, Jr.

QUESTION

from Thomas Collins, Jr., 125 Atlas Dr., New Castle, Delaware 19720: With the Data Base program on the free cassette, can I change line 150 to MF=1: MI=2691 and write just one large record?

ANSWER

No. First of all, you would have to say MF=2691 and MI=1, because MF is for the fields and MI for the records; but then, you have to remember that in Basic there is the zero subscript, so this is actually saving room for 2692 by 2 fields.

The next problem you get if you try this is that it says "Subscript out of range" if you use a number as large as 2691. For some reason, it will continue to give this error message if MF is 2481 or higher. From 2480 down, it simply says "Out of memory." About the largest number you can use for MF with a 48K disk system is 860.

Therefore, the answer to your question is simply that it is impractical to use the Data Base program in the manner that you suggest.

QUESTION

from Ray Van Rensburg, P.O. Box 398, Albany, Western Australia: I recently took out a subscription to your magazine and ordered various cassette tape programs for my Level II 16K machine from other suppliers. While the majority of the tapes are OK, the odd one is faulty. The manufacturers do not appear to be as efficient at dealing with queries as they are at taking your money initially, and I am getting more and more frustrated at the tapes lying around, totally useless to me. I have listed and examined the programs on the video display, and some of the problems are elementary, such as bad punctuation in the Title!?! I have tried editing the line, which the TRS-80 seems to accept, but when I run the program it reverts to the original bad line. Similarly I have tried deleting the line, with the same result. Finally, I have tried to RUN from the line following, but it won't!

It would seem that the tapes are protected in some way which precludes making any changes to them. I feel sure you must have had many readers experiencing these problems and I wonder whether you have a solution for this.

ANSWER

This is certainly a frustrating problem, which is probably caused by bad media, although in your case it could be that the tapes have become partially "zapped" by being exposed to X-rays during their long

period of transit. I doubt seriously that these programs are being "protected" in some way, though that possibility can't entirely be ruled out.

When a BASIC program is loaded into memory awaiting execution, the format of each line is as follows: first there is a pointer to the memory address of the next line, then a binary representation of the line number, then the statement itself, in which each verb is replaced by binary "tokens", and finally a terminator byte (zero). When the program (or tape from which it is read) gets "zapped", any of these bytes might get replaced with garbage. This may cause the pointer to the next line to get off, in which case if you LIST the program you will see spurious line numbers with incomprehensible statements. (If the binary tokens get zapped, the statement itself will be full of ridiculous things with many verbs next to one another.) You can't edit the lines, because replacing the line back into memory requires having the pointer to the next line adjusted properly; otherwise, everything following the line will again be off.

There is a possible solution to this problem, but it requires working from a disk system, where you have the possibility of saving the programs in "ASCII" form, and the Electric Pencil word processing program. The Pencil is necessary because it is the only one that produces a pure ASCII file. SCRIPSIT puts in markers and other bytes that make it unusable for this purpose.

What you should do is to load the program into memory and then save it using the A option (SAVE"PROGRAM",A). Now load the program into the Electric Pencil. (This requires placing a zero at the end of the file, as described in our March 1981 Questions and Answers, and saving the file with the extension "PCL".) Now you can go through the program with the Pencil and see just what garbage is there, edit it (if you can figure out what to do), and save it back to disk. When you go back to BASIC, you can load the Pencil file directly, with no further modifications.

Nevertheless, if you have received a bad copy of a program, most vendors will replace it with a good copy. If they don't, you can write letters to magazines like this so that other people can read about your experiences and avoid buying from those vendors.

QUESTION

from Dr. Siegfried Thomeier, 13 Exmouth Street, St. John's, Newfoundland, A1B 2E1, Canada: The main problem I have with my TRS-80 Model I Level 2 16K machine is still volume sensitivity for loading purchased program tapes. There are no problems with my


own tapes. Is there some machine language program that could be used to reduce this volume sensitivity?

My TRS-80 was one of the first, if not the first, purchased in Newfoundland, So this volume sensitivity may also have to do with this being one of the early machines.

ANSWER

There is, of course, a cassette modification available from Radio Shack. If you still have trouble, we have found a better way of coping with these problems: there is a device called the PK-80 Peak Reading VM ("The Peeker") made by Cook Laboratories, 375 Ely Avenue, Norwalk, CT 06854. This is a battery-operated meter that goes between the cassette recorder and the TRS-80 and allows you to read the volume level of incoming tapes. All you have to do to get it right is to adjust the level until it is between two marks on the meter. Just don't forget to turn it off when you're finished, because leaving it on will run the battery down. The Peeker costs about \$35, but is available for less in kit form. ■

**GO
PIGGYBACK!**



CENTRONICS

**ADD lowercase with our
PLUG-IN piggyback board!**

9WX7H Dot Matrix \$135

5WX7H Dot Matrix \$ 95

TWO complete character sets on board:

96 character ASCII **PLUS** choice of
128 character APL, TRS-80/H-19 Graphics or
Scientific. (Customer defined: add \$50/set).

Most printers convertible: specify logic board #



SYDNEY SEZ:
Shop Comparatively!

DSE

Digital Systems Engineering

12503 King's Lake Drive, Reston VA 22091 (703) 620-2994

ALSO AVAILABLE: New Centronics and Integral Data Systems printers at
15-20% below list; also, used printers of several makes. **Call for information!**

MasterCard, VISA, Check, MO, PO

All products warranted 90 days

SYNTHESIZE MUSIC AND PERCUSSION IN STEREO!

- **STEREO**—Separation by instrument! For example, play trumpet and oboe through channel A, clarinet and organ through channel B. You can switch instruments from channel to channel at any time!
- **PERCUSSION**—Now you can add a wide range of percussive sounds and special effects to your music!
- Existing Orchestra-80 files load and play in stereo automatically!
- Optional 5th Voice for use with speed-up mods!
- New editing features and commands!
- Plugs into any 16k Model I keyboard or expansion interface without voiding warranty!
- Includes tape and disk versions on cassette, 4 sample music files, manual, and fully assembled and tested printed circuit board!

Orchestra-85™
\$129.95

plus \$2.00 postage and handling
(\$5 for overseas airmail)
CA residents add 6% sales tax
MasterCard and Visa
accepted



WRITE FOR INFORMATION ON:

- **Upgrading**—Orchestra-80 to Orchestra-85 Switch to Stereo!
- **Greatest Hits**—Volumes I and II. All new music! Ready to load and play!
- **Orchestra-90™**—Model III version of Orchestra-85 Available soon!
- **Orchestra-80™**—The Original! \$79.95

Software Affair

858 Rubis Drive, Sunnyvale, CA 94087
(408) 295-9195

COLOR COMPUTER CORNER

Joseph Rosenman

This Month: Software Reviews

I had hoped to be able to write about the new Color Computer disk drives in this issue. Unfortunately, I have not yet been able to get any. When I do, I will devote an issue to a review of them. Instead, I will review some software for the Color Computer, starting this month with two pieces of software that Radio Shack sells for the Color Computer. Both are on the ROM packs.

PINBALL

(Cat. no. 26-3052, List price \$29.95)

As with all the ROM packs, using the software is easier than pie. All that you need to do is to plug in the pack and turn on the computer. Of course, you will also need to have the joysticks. The program begins by offering you three options: to begin playing the game, to edit the board, or to read in a previously stored board. To play the game, you "pull back" the right joystick. This "loads" the ball. Then, you push the joystick forward to release the ball. The buttons on the joysticks activate the right and left flippers. The game moves at a pretty quick clip. Those of you who are familiar with the Pinball game on the Model 1 (from Acorn software) will be a little disappointed with this pinball. It isn't quite as fast, and the board is "static." The Color Computer Pinball has no "Bermuda square." I also think that the board is rather "bare." Fortunately, one of the features of the Color Computer pinball is the ability to edit the playing board and save it onto cassette. While the edit features are a little awkward, I found them useable. The board uses a combination of 4 types of "bumpers":

- 1) Edge Bump (Green, 0 points)
- 2) Circle Pop (Red, 50 points)
- 3) Edge Pop (Red, 50 points)
- 4) Knock-out (Black, 150 points)

The Knock-outs will disappear when struck (they all reappear when the last one is removed). The Circle Pops and the Edge Pops all add speed when struck, and the Edge Bump subtracts speed when struck. The Edge Bump and Edge Pop form the "frame" of the board, and the Circle Pops and Knock-outs are placed into the board. As mentioned above, the board can be saved onto cassette after editing. It is necessary to have the Pinball Rom pack in to read in a previously saved board (only the board data is saved onto the cassette tape). The program has sound, though it is nothing to boast about. All in all, the game is fun. The ability to create your own boards is a creative plus that adds to the enjoyment of this game.

SKIING

(Cat. No. 26-3058, List price \$39.95)

Skiing is a realistic simulation game, that requires "you" to maneuver yourself down the ski course of 29 gates. Radio Shack recommends a 16K Color Computer for this game. The game produces a three dimensional view of skiing over a course (mostly downhill). Your speed and direction are controlled by the right joystick. When the game first comes on, you are faced with three choices: start the game, randomly create a new course, or toggle between "simple" and "complex" games. After you start the game, you need to pull the joystick back, then forward again. The COMPUTER will say "Get ready, ... get set, ... BANG" — and you're off! While in simple mode, the joystick controls speed (front/back) and direction (left/right). You need to maneuver through the different colored gates without missing any and without leaving the course. A time count is kept and is recorded in the program menu if the course is completed without errors. The program will beep at you if you miss a flag and will "snap" if you hit a flag or fence. One interesting feature is that you can veer so far off course that the course will disappear. (Eventually, you will run back into the course.)

In Complex mode, the game becomes a real challenge. The joystick still controls direction (left/right), but speed is handled differently. You speed up going downhill, and slow down going uphill or turning. To speed up (or start off), you need to "pull off" by pushing the joystick button. While playing in this mode, it is very easy to lose control. Since the games are all timed, one can continue to beat ones last speed with a "perfect" run. When you reach the end of the course (in both the simple and complex game), there will be a crowd at the finish line to "cheer" you in. Time to try again for a better time.

In the next issue, I will be reviewing software by Datasoft, Inc., and Spectral Associates.

Joseph Rosenman
35-91 161 Street, Apt. 4J
Flushing, NY 11358

continued from page 43

```
950 NEXT J
960 IF K > 1 THEN R$ = "("+R$+"")
970 LET F$=L$+CHR$(L+48)+R$+CHR$(R+48)
980 'eliminate 1's from formula
990 LET FF$=""
```

```

1000 FOR J=1 TO LEN(F$)
1010 LET P$=MID$(F$,J,1)
1020 IF P$="1" THEN 1040
1030 LET FF$=FF$+P$
1040 NEXT J
1050 LET F$=FF$
1060 RETURN
1070 'print formulas on two different lines
1080 LET P=P+2 'position across the line
1090 IF ABS(ASC(P$)-54) < 6 THEN 1110
1100 PRINT @ P,P$;:RETURN
1110 PRINT @ P+64,P$;:RETURN

```

CANADA MILEAGE

Tom Nicholls, of Westchester, Illinois submitted this problem: When traveling in Canada, and even in some parts of the United States, you purchase your gasoline in liters. You may or may not fill your tank at each stop, and your car's odometer may register the distance in either miles or kilometers. How do you compute the gas "mileage" in miles per gallon, and what would that be in kilometers per liter?

```

100 'CANADA MILEAGE
110 CLS
120 CLEAR 200
130 INPUT "BEGINNING ODOMETER READING";O
140 INPUT "IS THAT MILES, OR KILOMETERS";DU$ 'DISTANCE
UNITS

```

FREE



1981 FALL EDITION CATALOG OF COMPUTER SUPPLIES AND ACCESSORIES

Our latest edition...yours FREE for the asking! This direct-order catalog features 80-pages of more than 1700 supply products...many of which are designed for small business computer applications. Plus, we've just introduced 100 new products this fall...specially featured in a 20-page supplement. Some of these popular products are flexible disks, printer ribbons, and many hard-to-find products. And all are available for immediate shipment from our two stocking distribution centers.

To receive your FREE catalog, simply call 800-323-0628 (in Illinois call 312-377-0990).

VISIBLE COMPUTER SUPPLY CORPORATION

A Subsidiary of Wallace Business Forms, Inc.
3626 Stern Drive | 1615 S. Stockton St.
St. Charles, Illinois 60174 | Lodi, CA. 95241

Send for your free copy today!

MAYDAY™

The Complete Uninterruptible Power Supply



The lights blinked - even the slightest power failure



can ruin a data disk and cause loss of the program.



Protect your time and investment -

easy to use -
just plug your computer into
MAYDAY.™



for more information contact ...

Sun - Technology, Inc.
Box 210
New Durham, New Hampshire 03855
(603) 859-7110

We honor:



(Manufacturing high technology products since 1970)

AT LAST!

Mass production prices for high quality software. Buy direct and save 50%. Also available for CPM and HDOS.

DATA BASE MANAGER Mod I & III \$69, \$149 (48K). Mod-II \$199
Maintain a data base and produce reports, all without user programming. Define file parameters and report formats on-line. Key random access, fast multi-key sort, field arithmetics, audit log, label. No time-consuming overlays. 500 happy users in one year. Mod-II and 48K versions have over 50 enhancements, including 40 fields maximum. "IDM-M2 is great!" - 80-US.

A/R Mod-I \$69 Mod-II \$149 Mod-III \$69
Handles invoices, statements, aging, sales analysis, credit checking, forms input, and order entry. Unlike other accounts receivable programs, ours can be used by doctors, store managers, etc.

WORD PROCESSOR \$49
Centers, justifies, indents, and numbers pages. Mod-I version features upper/lower case without hardware modification! File merge option available.

MAILING LIST Mod I & III \$59, \$79 (48K). Mod-II \$99
The best! Compare and be selective. Includes forms input, 5-digit selection code, zip code extension, sort on any field, and multiple labels. Who else offers a report writer and merges with word processor?

INVENTORY Mod I & III \$89, \$109 (48K) Mod-II \$149
Fast key random access. Reports include order info, performance summary, EOQ and user-specified reports. Many people have converted to our system! "Next to impossible to damage the file."

GL, A/R, A/P, PAYROLL Mod-II \$129 each
Integrated accounting package. 100+ page manual. As opposed to Osborne's slow binary search and 64 column screen, we use fast ISAM and 80 columns. Dual disk and TRSDOS required.

L216 \$59
A cassette package of 10 business programs for Level II 16 K systems. Includes word processor and data base manager. Poker game \$19.

Most programs are on-line, interactive, random-access, bug-free, documented, and delivered on disks. Mod-I programs require 32K TRSDOS. We're #1 in business software—don't let our low price fool you! Ask for our free 20-page catalog if you're still not convinced. Compiled versions are available.



MICRO ARCHITECT, INC.
96 Dothan St., Arlington, MA 02174

```

150 IF LEFT$(DU$,1)="M" THEN 170 'RESPONSE OK
160 IF LEFT$(DU$,1) < "K" THEN 140 'ERROR TRAP
170 PRINT,"VOLUME UNITS ARE LITERS OR GALLONS (L/G)"
180 PRINT,"LAST INPUT INDICATES FILLED OR NOT FILLED (F/N)"
190 PRINT,"SAMPLE INPUT: 32.4,L,23833,F"
200 LET PO=0 'SAVE PREVIOUS ODOMETER READING
210 INPUT "VOLUME, UNITS, ODOMETER, F/N";V,VU$,O,F$
220 IF VU$="L" THEN 250 'ALREADY IN LITERS
230 IF VU$ < "G" THEN 210 'ERROR TRAP
240 LET V=V*3.78541 'CONVERTS GALLONS TO LITERS
250 LET D=O-PO 'DISTANCE
260 LET PO=O
270 IF DU$="K" THEN 290 'ALREADY IN KILOMETERS
280 LET D=D*1.60934 'CONVERTS MILES TO KILOMETERS
290 LET TV=TV+V 'TOTAL VOLUME USED, LITERS
300 LET TD=TD+D 'TOTAL DISTANCE, KILOMETERS
310 IF F$="F" THEN 330
320 GOTO 210
330 REM FILLED TANK - CALCULATE RESULTS AND DISPLAY THEM
340 LET CM=TD/TV 'CANADIAN "MILEAGE", KM/L
350 LET AM=TD*.621373/(TV*.264172) 'AMERICAN MILEAGE
360 PRINT
370 PRINT USING"###.## MILES PER GALLON";AM;
380 PRINT USING"----- ###.## KILOMETERS PER LITER";CM
390 PRINT
400 LET TD=0:TV=0 'RESET THE TOTALS TO ZERO
410 GOTO 210
420 '

```

Gordon E. Speer
3304 Woodlawn Road
Sterling, IL 61081
Phone (815) 625-5251

continued from page 47

```

350 INPUT"HIGHEST ANNUAL SALARY RATE";W
360 INPUT"SALARY STEP RATE";Z:PRINT
370 IF W<V OR V>W OR Z>W THEN 330
380 GOSUB 510
390 FOR Y=V TO W STEP Z
400 M=Y/12:B=Y/24:W=Y/52:D=Y/260:H=Y/2080
410 A$="#####.##": B$="#####.##": C$="#####.##"
420 D$="#####.##": E$="#####.##"
430 LPRINTTAB(3)USINGA$;Y;:LPRINTTAB(16)USINGB$;M;
440 LPRINTTAB(29)USINGB$;B;
450 LPRINTTAB(43)USINGC$;W;:LPRINTTAB(57)USINGD$;D;
460 LPRINTSTRING$(7," ")USING E$;H
470 NEXT Y
480 LPRINTTAB(4) L$
490 INPUT"DO YOU WISH TO START AGAIN (Y/N)....";R$
500 IF R$="Y" THEN 10 ELSE END
510 LPRINTTAB(9)CHR$(14)"** SALARY RATE CHART **"
520 LPRINTCHR$(32)
530 LPRINTTAB(7)"YEARLY";TAB(18)"MONTHLY";
540 LPRINTTAB(30)"BI-MONTHLY";
550 LPRINTTAB(45)"WEEKLY";TAB(58)"DAYLY";
560 LPRINTSTRING$(8," ") "HOURLY"
570 LPRINTTAB(7)"INCOME";TAB(18)"INCOME";
580 LPRINTTAB(32)"INCOME";

```

continued on page 62

E-Z SOFT
P. O. Box #5030
Fredericksburg, Va. 22403-0630
Telephone (703) 371 - 5287

September 1981

We are pleased to announce the arrival of;

DANDY DISK

BETTER than a catalog system.

- 'Turn on power.
- 'Insert DANDY DISK
- 'Press RESET

Your screen will look like this;

Place your own 'MAKE SENSE' program titles here. (up to 25 chr's) (up to 20 pgm's)

```

)-)-)-)-)  DANDY  DISK  (-(-(-(-(-
-----
A (Word processing program.)  K .....
B Time billing program.      L .....
C System monitor.            M .....
D Time data gen. pgm.        N .....
E .....                      O .....
F (General calculating pgm.)  P .....
G Data management sys.       Q .....
H (use data disk in :1)      R Jump to BASIC Ready )
I .....                     S :0 BACKUP - Single drive
J .....                     T :1 BACKUP - Twin drives

```

'X' - MODIFY DANDY DISK

* (4.) Access any program that YOU have installed with a single keystroke.

* (5.) OR - Make a backup of DANDY DISK master with a single keystroke.

* (6.) OR - ADD or DELETE a program listing.

* E - Z instructions are right on DANDY DISK

(For use on DISK BASIC - MODEL III only.)

ONLY 19.95 + 1.50 P & H

Va. residents add 4% tax.

TIME ...

**METHUSELAH™ has time for you
and your TRS-80***

The name Methuselah has always been associated with long life. The Methuselah computer clock board with its 24 hour clock and its perpetual calendar is indeed worthy of the title. Methuselah puts state of the art technology into action with the on board four year lithium battery back-up to keep it running even when your computer is off. That means no more fooling around with the software or hardware "clocks" that become Rip Van Winkles when the computer is reset or turned off.

Methuselah has many other timely features. Software patches keep the DOS and BASIC time and clock commands ticking. Only two screws mount Methuselah inside the expansion interface without soldering, clipping, cutting, or jumpering. There is even a spare 1/0 port and four different interrupts available for people who love to tinker.

SPECS: MM/DD/YY, HH:MM:SS and day of the week. Four year lithium battery back-up. Crystal controlled timing (adjustable 32.768 oscillator). Twenty four hour clock and perpetual calendar.

Send check or money order to:



6330 W. North Ave.
Wauwatosa, WI 53213
(414) 259-0120

M-S1..... \$97.00
(add \$4.50 P and H)
S-S1..... \$17.50
(add \$2.50 P and H)
(If you wish to use Methuselah
and the RS-232 board (26-1145)
together, order this option which
includes a new cover and con-
nector.)
WI residents add 4% sales tax.

METHUSELAH is a
trade mark of NMD Designs

*Reg. TM. Tandy Corp.

HOW ACCEL2 WORKS

TRS-80 Model I/III BASIC Compiler

ACCEL2 uses a novel translation technique that keeps code growth down and insures highest compatibility with BASIC source programs while giving huge speedups. Only a carefully chosen subset of BASIC instructions is translated. The non-compileable statements are left in the compiled program in their original source form and at run-time are actually given to the BASIC interpreter to execute. Program flow may flip into direct execution of the compiled machine instructions and then flop back to interpretation many times during execution.

Why Compilation improves performance.

*Name Resolution Term given to the process of identifying the value of a variable given its name. As a program runs, the interpreter builds a dictionary consisting of a chain of items, each containing a variable name, data type and current value. Every time a variable is to be resolved the interpreter must sequentially search this dictionary. By contrast, ACCEL2 builds the variable dictionary once at compile time and thereafter can refer to the variable names by direct address, with no run-time search.

*Line Resolution The interpreter has to take the line-number following a GOTO or GOSUB, convert it to binary, and then search the program sequentially to find the target line. At compile-time ACCEL2 generates single machine-instructions for GOTO or GOSUB using the actual address of the target line. For the interpreter, both name resolution and line resolution get slower as the program gets more complex, whereas for compiled code these two operations are independent of program size or number of variables.

*Computational Operations The interpreter must parse each statement every time, find the one-byte codes that correspond to the operations, look ahead to the next operator to establish the precedence rules and check for data-type mismatch and conversion. Constants must be converted from character strings to internal binary. But under ACCEL2 constants are converted and embedded right in the Z80 instruction stream, and operations are translated once and for all at compile-time into sequences of calls to ROM or the run-time component. INTEGER operations are actually turned into directly executing straight-line Z80 code!

The result is a mixture of BASIC statements and machine language instructions, usually not more than 1½-2½ times the size of the original but running much faster (can be 50-100 times as fast with some programs).

ACCEL2: 32K TRS-80 Model I/III. Compiles selected subset in all variable types, local and global compilation options, output save to ES/F wafers, disk under TRSDOS, NEWDOS, NEWDOS/80.

\$88.95 + \$2.00 shipping

Developed in Britain
by Southern Software



ALLEN GOLDER SOFTWARE
Box 11721 Main Post Office
San Francisco, CA 94101
(415) 387-3131

Mastercharge/Visa
CA add 6%

TRS-80, TRSDOS 1m Radio Shack

Stringy/Floppy 1m exatron inc. NEWDOS 1m Apparat, Inc.



SUPER UTILITY PLUS

Our original Super Utility was hard to beat—we tried anyway. Now Kim Watt, of Breeze Computing, Inc., offers you SUPER UTILITY PLUS; an exceptional, completely rewritten program, including in excess of 70 possible programming selections. In addition, it now operates on Single or Double Density throughout all program utilities. Truly the "Utility of Utilities".

Listed below are only the highlights of Super Utility Plus's outstanding features.

ZAP

- Read and/or modify data in HEX, ASCII, DECIMAL, BINARY or OCTAL
- Search routine, locates highest or lowest configured track, search disk for byte list, ASCII, string word list, or encrypted code
- Display sector (disk, file, memory)
- Compare, copy, verify, and zero disk sectors

PURGE

- Full screen editing kill control
- Complete disk directory
- Zero unused directory entries or unused disk granules
- Compute existing passwords
- Change disk name, date, passwords, auto command and file parameters

FORMAT

- Standard format or format without erase
- Special format
- Build format track
- Software bulk erase

DISK COPY

- Standard copy with or without format
- Special Copy (to back up many protected disks) - purchaser use only

If you want more info, send for complete overview. Or, if you already as excited about Super Utility Plus as we are *send check or M.O. for \$74.95, plus \$5.00 shipping and handling to:

BREEZE COMPUTING, INC.

P.O. Box 1013 • Berkley Michigan 48072

*Michigan residents enclose additional 4% sales tax, foreign orders enclose \$10.00 shipping and handling. C.O.D. orders may order by calling us at (313) 288-9422.

TAPE COPY

- Read, write, or verify tapes
- Bit by bit copying routine - purchaser use

DISK REPAIR

- Repair HIT and GAT sectors and Boot
- Complete directory check
- Recover killed files
- Read protect, un-read protect or move directory
- Clear unused entries
- Advise of all inactive files

MEMORY

- Display, move, test, compare, zero, exchange, input or output a byte to any port
- Exchange, jump to, reverse, fill, string search or load/write entire sectors to/from memory

FILE

- Display, compare and copy file sectors
- Locate free space, files, drive status
- Create files and clear files from disk

CONFIGURE SYSTEM

- Custom configure S/U Plus to your system
- Single or double density in any combination, 5" drives, select your operating system boot, upper or lower case, high speed clock, single or double headed drives, or configure your printer

PROGRAMMER

TAKE IT...

IT'S ALL YOURS

If you're freelancing software today, or want to freelance it tomorrow, look to PROGRAMMER for the latest market reports.

CHARTER OFFER
6 ISSUES
JUST \$13.00

PROGRAMMER gives you tips on what's selling and why. Features on languages, solutions to your programming problems; columns from working programmers.

Finally, a newsletter that's geared to your interests.

☐ CHECK HERE FOR SAMPLE ISSUE JUST \$2.00

Send check or money order to:

PROGRAMMER

P.O. BOX 3210

MANCHESTER, N.H. 03105

6 MONTHS
\$13.00

NAME: _____

ADDRESS: _____

CITY: _____ STATE: _____ ZIP: _____

PROGRAMMER—The \$100 information package for \$13.00

D-1

It's Not Your Printer, It's Your Software

Do you own a Centronics 737? 739? Lineprinter IV? Tired of the limitations of SCRIPSIT? QWERTY 3.0 will let you produce Greek letters, mathematical symbols, simultaneous subscripts and superscripts, controlled underlining, footnotes, 2 and 3 column folio formats, TABLES in proportional mode, page ends, plus much more. See our ad in '80 *Microcomputing* for a better description.

Qwerty 3.0 is more than "fully tested." It has seen thousands of hours of use in a university environment. A masters thesis and a statistical doctoral dissertation were produced using this package.

Qwerty 3.0 is the finest SCRIPSIT addition available for the Centronics 737, 739 and Lineprinter IV. You must own one of these printers, a copy of SCRIPSIT, and a disk drive to use it. It is the best. Period. **WE GUARANTEE YOU WILL AGREE!** If for some reason, you find that this program doesn't meet your needs, return the entire package within 14 days for a prompt and cheerful refund.

Qwerty 3.0 Disk, Manual, Reference Card, and Printer Table Rule \$49.95

Qwerty 3.0 Manual Alone \$10.00

MED SYSTEMS SOFTWARE

P.O. BOX 2674-C
CHAPEL HILL, N.C. 27514
(919)933-1990

continued from page 60

```
590 LPRINTTAB(45)"INCOME";TAB(58)"INCOME";
600 LPRINTSTRING$(7," ") "INCOME"
610 LPRINTTAB(4) L$
620 RETURN
630 CLS:PRINTTAB(12)"S A L A R Y   R A T E   C H A R T"
640 PRINT F$
650 PRINTTAB(1)"YEAR";:PRINTTAB(13)"MONTH";
660 PRINTTAB(25)"WEEK";:PRINTTAB(37)"DAY";
670 PRINTTAB(49)"HOUR"
680 PRINT F$
690 RETURN
700 'A PROGRAM USING LEVEL II BASIC FOR TRS-80 MODEL 1
710 'BY: MR.FRANK P.VLAMINGS
720 ' 36217 WORTHING DRIVE
730 ' NEWARK
740 ' CALIFORNIA 94560
750 ' PHONE(415) 793-6484
```

Got a question about the TRS-80? Send it to *Questions, H & E Computronics, 50 North Pascack Road, Spring Valley, New York 10977*. If you wish a personal reply, please enclose a self-addressed, stamped envelope.



The Electronic Astrologers™

cast an accurate birth chart for any date, time and place from 1880 to 2000, then tell you what it means! They give personalized astrological consultations of 1500 words or more, based not just on your Sun sign, but on the unique relation of ALL the planets at your birth moment.

ASTRO-SCOPE™

delineates your character, its strengths and weaknesses, and touches on many areas of life such as relationships, finances, career and life goals. Text is by Steve Blake, psychology-oriented astrologer and popular lecturer, and Robert Hand, pioneer in astrological microcomputing and author of four bestselling astrology books. . . . \$30

Sex-O-Scope™

tells you things your astrologer would blush to reveal! John Townley, author of *Planets in Love*, an editor of *Sexology Today*, and a student of all forms of sexual behavior, uncovers your tastes and turn-ons. . . . \$30

for
TRS-80* Model I or III, with TRSDOS, 32K RAM, 2 drives
Apple II† with Applesoft, 32K RAM, 1 drive

†TM of Apple, Inc.

*TM of Tandy Corp.

WE TAKE MASTERCARD AND VISA



AGS Software

Box 28, Orleans, Ma. 02653

Telephone 617/255-0510

Outside USA please add \$2.50 shipping charge



COMPUTER INTERFACES & PERIPHERALS

ANNOUNCING: POS 800/1600 UNIVERSAL TAPE DRIVE CONTROLLER

This "black box" controller/formatter is designed as a standalone interface between industry-standard NRZ1 (800 BPI) and PE (1600 BPI) tape drives and a parallel or RS-232 serial port of an 8-bit ASCII computer. Serial interface emulates a terminal vis-a-vis your system software; parallel interface emulates a reader/punch and responds to CPM-style PIP commands from your computer. Tape speeds 12.5, 25 and 37.5 ips. Interface is microprocessor-controlled, includes power supply and 4K or 16K buffer memory. Prices and details available upon request.

- POS-100 NRZ1 TAPE DRIVE CONTROLLER/FORMATTER — Now your micro can read and write IBM/ANSI compatible NRZ1 format 9-track magnetic tapes. The POS-100 consists of S-100 bus card, 6' ribbon cable, tape drive controller card, cable to Pertec-Standard NRZ1 Tape drive, plus documentation and Z-80 or 8080 software (specify). Power is derived from tape drive and S-100 bus. Ship wt.: 10 lbs. Suggested Retail Price \$995.00
- POS DAISY-WHEEL PRINTER INTERFACE for TRS-80 — Will drive Diablo HyType I, HyType II, and Qume Q and Sprint 3 printers. Includes 1K user-available memory for custom print routines (such as graphics, bidirectional printing, etc.). Programmed to respond to print commands from BASIC ELECTRIC PENCIL™ and SCRIPSIT™ software. Draws its power from printer. Ship wt.: 5 lbs. Price \$250.00
Cables, each (Specify HyType I, HyType II, or Qume) \$ 25.00
- POS ASCII INTERFACE for IBM I/O SELECTRIC — This Centronics-style parallel printer interface will drive an IBM Model 731 or 735 I/O typewriter (EBCD and Correspondence codes). No software needed. Features on-board EPROM which holds up to 8 ASCII-to-IBM code tables for different type spheres. Closed-loop operation runs at maximum printer speed; stops and starts on a single character without loss of data. Requires +12VDC and ±5VDC power source. Ship wt.: 5 lbs. Price \$249.95
Power Supply (+5VDC, +12VDC, +24VDC for Solenoids on Printer) . . . \$ 49.95
- CONVERT OFFICE SELECTRIC TO I/O TYPEWRITER — Kit includes assembled solenoids, switches, wire harness, magnet driver PCB plus instructions for installation and mCPU interface. Price \$150.00
- "FORMALINER" Variable Width Forms Tractor for 15" Selectrics . . . \$95.00
- GTE Model 560 ASCII SELECTRIC I/O Terminal — With RS-232 Serial Interface and digital cassette deck for use as memory typewriter. Ship wt.: 100 lbs. Price, tested and adjusted \$1,095.00
- POS ASCII IBM SELECTRIC PRINTER — 15" Selectric from GTE terminal cleaned and adjusted with POS Centronics-style ASCII printer interface. UC/LC, carbon and fabric ribbons. Compatible with TRS-80, Apple, SOL and other CPU parallel printer ports. Ship wt.: 75 lbs. Price \$895.00

PACIFIC OFFICE SYSTEMS

2265 Old Middlefield Way • Mountain View, CA 94043 • (415) 493-7455

H & E COMPUTRONICS INC.


● ● EVERYTHING FOR YOUR TRS-80™ MODEL I or MODEL III ● ●

* TRS-80 is a trademark of the Radio Shack Division of Tandy Corp.

Apparat, Inc.
introduces

NEWDOS/80

For the 80's —
an enhanced NEWDOS
for your TRS-80™

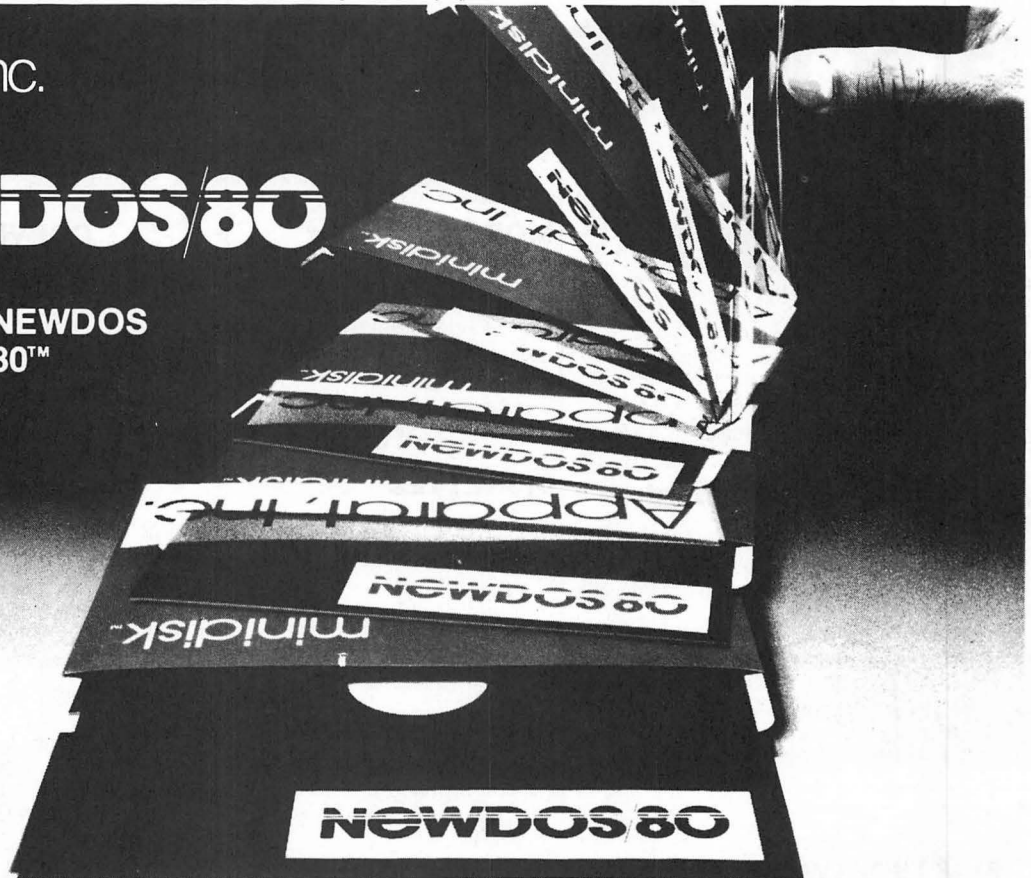

Apparat, Inc., announces the most powerful Disk Operating System for the TRS-80™. It has been designed for the sophisticated user and professional programmer who demands the ultimate in disk operating systems.

• DOUBLE DENSITY ON MODEL I

Use of the LNW DOUBLE or the PERCOM DOUBLER will expand storage 80% under NEWDOS/80 Version 2.0, mixing single and double density specifications without any patches.

• SINGLE DENSITY ON MODEL III

Will allow the MODEL III to read disk from MODEL I and to write disks the MODEL I can read, making it easy to move programs between the two machines.

• EXPANDED DIRECTORIES

Directories can be expanded three times the normal number of available entries, even on DOS disks. This is extremely useful when using double density.

• DYNAMICALLY MERGE IN BASIC

To allow sections of BASIC programs to be deleted and replaced with lines from a disk file during program execution. Also allows merging of non-ASCII format files.

• SELECTIVE VARIABLE CLEARING

Allows the programmer to keep some variables and release the space used by the rest; also specific variables may be erased releasing the space they use.

• PAGE SCROLLING IN BASIC

Scrolling has been modified to allow the user to display programs page by page, in addition to the regular line scrolling.

• REPEAT FUNCTIONS

Keys in MODEL I repeat when held down. Entering "R" as a DOS command causes the previous DOS command to be repeated.

• ROUTING FOR DEVICE HANDLING

To send input and output from one device (display, printer, keyboard, etc.) to others or to a routine in main memory.

• DISASSEMBLER OUTPUT TO DISK

The Disassembler will now write a source code file to disk, which the editor assembler can read and edit.

• CHAINING ENHANCEMENTS

Features to allow chain files to be written from SCRIPSIT; also chaining may be switched on and off without changing chain file positioning, and may be executed via CMD "xxx" and DOS-CALL.

• SUPERZAP

Has the ability to scan diskettes or disk files to find the occurrences of specific values. Also will generate disk file passwords and hashcode.

• FAST SORT ROUTINE

Basic function CMD "O" provides direct or indirect in-memory sort of multiple arrays.

• MERGING OF NON-ASCII BASIC PROGRAMS

• BASIC SINGLE STEPPING

- New BASIC commands that supports files with variable record lengths up to 4095 Bytes long.
- Mix or match disk drives. Supports any track count from 18 to 80. Use 35, 40 or 77 track 5" mini disks drives or 8" disk drives, or any combination.
- A security boot-up for BASIC or machine code application programs. User never sees "DOS READY" or "> READY" and is unable to "BREAK", clear screen, or issue any direct BASIC statement including "LIST."
- New editing commands that allow program lines to be deleted from one location and moved to another or to allow the duplication of a program line with the deletion of the original.
- Enhance and improved RENUMBER that allows relocation of subroutines.
- CDE function; simultaneous striking of the C, D and E keys will allow the user to enter a mini-DOS to perform some DOS commands without disturbing the resident program.
- Upward compatible with NEWDOS 2.1 and TRSDOS 2.3.
- Includes Superzap 3.0 and all Apparat 2.1 utilities.

COMPUTRONICS INC.

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

NEW TOLL-FREE
ORDER LINE
(OUTSIDE OF N.Y. STATE)
(800) 431-2818

24 HOUR
ORDER LINE
(914) 425-1535

NEW DOS/80

(TRS-80 MODEL I or MODEL III)

\$149.00

- * ADD \$3.00 FOR SHIPPING IN UPS AREAS
- * ADD \$4.00 FOR C.O.D. OR NON-UPS AREAS
- * ADD \$5.00 TO CANADA AND MEXICO
- * ADD PROPER POSTAGE OUTSIDE U.S., CANADA & MEXICO

*** ALL PRICES AND SPECIFICATIONS SUBJECT TO CHANGE***

Compare our prices with any in the magazine.

We win.

16 K RAM KITS

NEC 4116 200 ns	1795
DIP SHUNTS (FOR KEYBOARD MEM UPGRADE)	4.00

TRS-80 MOD I HARDWARE

PERCOM DATA SEPARATOR	27.00
PERCOM DOUBLER	159.00
DOUBLE ZAP II/80 (CONVERTS ND/80 TO D.D.)	45.95
MPI 40 TRACK DISK DRIVE (B-51)	299.00
SHUGART 40 TRACK DISK DRIVE (400L)	299.00
MPI 80 TRACK DISK DRIVE (B-91)	429.00
TANDON 80 TRACK DISK DRIVE	429.00
TANDON 40 TRACK DISK DRIVE	299.00
LNW DOUBLER WITH DOSPLUS 3.3D	159.00
PERCOM SPEAK-2ME-2	64.95

TRS-80 SOFTWARE

LAZY WRITER MOD I	125.00
PROSOFT MOD I, III	79.00
SPECIAL DELIVERY (MAIL LIST PROG) MOD I, III	119.00
X-TRA SPECIAL DELIVERY (MAIL LIST PROG)	199.00
TRACKCESS MOD I	24.95
OMNITERM SMART TERMINAL PKG MOD I, III	89.95

PRINTERS

ANADEx DP 9000	1195.00
ANADEx DP 9001	1195.00
ANADEx DP 9500	1295.00
ANADEx DP 9501	1295.00
CENTRONICS 739	765.00
C-ITOH 25 CPS PARALLEL	1440.00
C-ITOH 25 CPS SERIAL	1495.00
C-ITOH 45 CPS PARALLEL	1770.00
C-ITOH 40 CPS SERIAL	1870.00
C-ITOH TRACTOR OPTION	175.00
EPSON MX-80	\$CALL
EPSON MX-80 F/T	\$CALL
EPSON MX-100 F/T	\$CALL
IDS-445G PAPER TIGER	795.00
IDS-460G PAPER TIGER	1149.00
IDS-560G PAPER TIGER	1495.00
INFOSCRIBE 500 9X9. 150 CPS (TI-810 REPLACEMENT)	1495.00
MALIBU 200 DUAL MODE	2995.00
NEC SPINWRITER 5510 SERIAL RO	2595.00
NEC SPINWRITER 5530 PARALLEL RO	2595.00
NEC SPINWRITER 5500 D SELLUM OPTION	2795.00
NEC SPINWRITER 3500 SELLUM OPTION	2195.00
OKIDATA MICROLINE 80	399.00
OKIDATA MICROLINE 82	599.00
OKIDATA MICROLINE 83	795.00

CP/M is a trademark of Digital Research.

MODEMS

NOVATION CAT ACOUSTIC MODEM	145.00
NOVATION D-CAT DIRECT CONNECT MODEM	155.00
NOVATION AUTO-CAT AUTO ANSWER MODEM	229.00
UDS 103LP DIRECT CONNECT MODEM	175.00
LEXICON LX-11 MODEM	115.00

DISKETTES

MD 525-01,10,16	26.50
MD 550-01,10,16	44.50
MD 577-01,10,16	34.80
MD 557-01,10,16	45.60
FD 32 OR 34 -8000	45.60

DISKETTE STORAGE

5 1/4" PLASTIC LIBRARY CASE	2.50
8" PLASTIC LIBRARY CASE	3.50
PLASTIC STORAGE BINDER WITH INSERTS	9.95
PROTECTOR 5 1/4"	24.95
PROTECTOR 8"	29.95

CP/M SOFTWARE

MICROSOFT BASIC-80	299.00
MICROSOFT BASIC COMPILER	319.00
MICROSOFT FORTRAN-80	399.00
PEACHTREE SYSTEMS	CALL
MAGIC WAND (REQUIRES CP/M)	275.00
WORD STAR (REQUIRES CP/M)	310.00
MAILMERGE (REQUIRES WORD STAR)	100.00
SPELLGUARD	239.00
CP/M PICKLES & TROUT FOR TRS-80 MOD II	175.00

CORVUS

TRS-80 MOD I, II

Controller, Case/P.S., Operating System, A&T

5 Megabytes	3095.00
10 Megabytes	4495.00
20 Megabytes	5395.00
MIRROR BACK-UP	700.00

SPECIALS

NO. 1 - TRS-80 DISK & OTHER MYSTERIES/BOX OF DISKS/PLASTIC LIBRARY CASE	44.50
NO. 3 - NEWDOS/80 2.0/BOX OF D SKS/PLASTIC LIBRARY CASE	149.00
NO. 4 - MICROSOFT BASIC COMPILER/BOX OF DISKS/PLASTIC LIBRARY CASE	190.00
NO. 5 - MICROSOFT BASIC D & OTHER MYSTERIES/ BOX OF DISKS/PLASTIC LIBRARY CASE	49.95
NO. 6 - DOUBLE DENSITY SPECIAL NEWDOS/ 80 DOUBLE ZAP II, BOX OF DISKS, PLASTIC LIBRARY CASE	309.00
TANDON 40 TRACK WITH NEWDOS +	320.00

SUPPLIES

AVERY TABULABLES

1,000 3-1/2 x 15/16	8.49
3,000 3-1/2 x 15/16	14.95
5,000 3-1/2 x 15/16	19.95

UARCO PAPER (Prices F.O.B. S.P.)

9-1/2 x 11 18 lb white	29.00
14-7/8 x 11 18 lb white	39.00

We stock a complete line of computer covers, printer ribbons, print wheels & NEC thimbles. Call us for your needs.

We built a reputation on our prices and your satisfaction.

We guarantee everything we sell for 30 days. If anything is wrong, just return the item and we'll make it right. And, of course, we'll pay the shipping charges.

We accept Visa and Master Card on all orders. COD accepted up to \$300.00. We also accept school purchase orders.

Please add \$2.00 for standard UPS shipping and handling on orders under 50 pounds, delivered in the continental U.S. Call us for shipping charges on items that weigh more than 50 pounds. Foreign, FPO and APO orders please add 15% for shipping. California residents add 6% sales tax.

Alpha Byte STORES

(213) 883-8594

31245 La Baya Drive, Westlake Village, California 91362

The prices quoted are only valid for stock on hand and all prices are subject to change without notice.

H & E COMPUTRONICS INC.

• • • EVERYTHING FOR YOUR TRS-80™ • • •

And All Microsoft BASIC Computers

* TRS-80 is a trademark of the Radio Shack Division of Tandy Corp.

Announcing!

DOS RANDOM ACCESS & BASIC FILE HANDLING

Written For TRS—80 and All Computers Using MICROSOFT basic

FINALLY IT IS HERE. At last someone wrote a book on disk random access and file handling. A book written for the non-programmer. Written for the businessman and professional who need to solve and write special programs for in house business problems.


Written for the hobbyist who wants to go beyond the cassette recorder and into disk storage and file manipulation.

This book handles a subject of reasonable complexity, so simple and down to earth, that anyone with some Level II experience can cope with the material.

This book is written using a simple program as a starting point. The programs grow in ability and complexity as the book progresses into the various aspects of file handling and record manipulation. Extensive effort has been made to keep the material coherent and every program line is explained in detail.

The programming material presented in this 150 page self-instruction tutorial will provide any non-programmer with the ability to write special programs for inventories, mailing list, work scheduling, record keeping, research project data manipulation, etc. The subjects covered in this edition are as follows

- (A) The writing of a Menu to summarize program functions.
- (B) The writing of a screen format to accept record data.
- (C) The creation of the basic record.
- (D) The Fielding and LSET routines for buffer preparation.
- (E) The writing of the record to disk in a Random Access mode.
- (F) The retrieval of a record from disk in a Random Access mode.
- (G) The ability to change or edit a record.
- (H) The LPRINT capability from disk using three different formats.
- (I) Deleting a record from a Random file.
- (J) Sorting the Random file.
- (K) Searching the Random file by name or other keyfield.
- (L) The ability to search in a "NEXT or PRIOR" fashion.
- (M) The ability to purge a disk file from deleted records.
- (N) The ability to calculate with data from a disk file.
- (O) The provision for future expansion of the data fields.
- (P) The use of flags to prevent program crashes.
- (Q) Date setting, printer on-line, and many other routines that make a program run like a commercial written program.

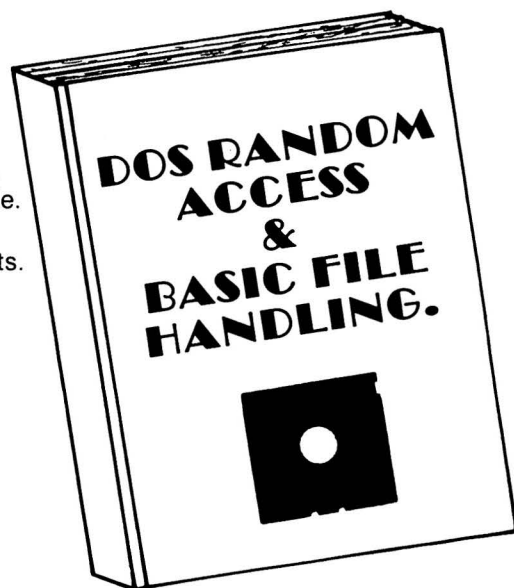

D.S.C., Publishing, Div. of,
D.S.C., INCORPORATED.

H & E COMPUTRONICS INC.
MATHEMATICAL APPLICATIONS SOFTWARE

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

- * ADD \$3.00 FOR SHIPPING IN UPS AREAS
- * ADD \$4.00 FOR C.O.D. OR NON-UPS AREAS
- * ADD \$5.00 TO CANADA AND MEXICO
- * ADD PROPER POSTAGE OUTSIDE U.S., CANADA & MEXICO

*** ALL PRICES & SPECIFICATIONS SUBJECT TO CHANGE ***



**DOS RANDOM ACCESS
& BASIC FILE HANDLING**

\$29.95

24 HOUR
ORDER
LINE

(914) 425-1535



**NEW TOLL-FREE
ORDER LINE**
(OUTSIDE OF N.Y. STATE)

(800) 431-2818

For Privacy Act Notice, see page 3 of Instructions | For the year January 1–December 31, 1979, or other tax year beginning , 1979, ending , 19

Use IRS label. Otherwise, please print or type.	Your first name and initial (if joint return, also give spouse's name and initial)	Last name	Your social security number
	Present home address (Number and street, including apartment number, or rural route)		Spouse's social security no.
	City, town or post office, State and ZIP code		Your occupation ▶
			Spouse's occupation ▶

Presidential Election Campaign Fund ▶ Do you want \$1 to go to this fund? ☐ Yes ☒ No **Note: Checking "Yes" will not increase your tax or reduce your refund.**

If joint return, does your spouse want \$1 to go to this fund? . . . ☐ Yes ☒ No

...**EVERYTHING FOR YOUR TRS-80™**...
TRS-80 is a trademark of the Radio Shack Division of Tandy Corporation

1981 INCOME TAX PAC

Completely Revised ★ Latest Tax Tables ★ Fully Tested ★ Complete Manual and Documentation

★ ★ The New Version Of The Income Tax Pacs Are Full Of Error Catching Codes ★ ★

★ ★ Making It Impossible To Make An Error ★ ★

— Follow The Simple Step By Step Procedure That Makes Tax Preparation Simple —

- FORM 1040 (LONG FORM)
- FORM 1040A (SHORT FORM)
- FORM 2106 EMPLOYEE BUSINESS EXPENSE
- FORM 2210 UNDERPAYMENT OF ESTIMATED TAX BY INDIVIDUALS
- FORM 2440 DISABILITY INCOME EXCLUSION
- FORM 2441 CREDIT FOR CHILD AND DEPENDENT CARE EXPENSES
- FORM 3903 MOVING EXPENSE ADJUSTMENT
- FORM 4797 SUPPLEMENTAL SCHEDULE OF GAINS AND LOSSES

★ ★ PROFESSIONAL ★ ★ INCOME TAX PAC C

- SCHEDULE A ITEMIZED DEDUCTIONS
- SCHEDULE B INTEREST AND DIVIDENDS
- SCHEDULE C PROFIT (OR LOSS) FROM BUSINESS OR PROFESSION
- SCHEDULE D CAPITAL GAINS AND LOSSES
- SCHEDULE E SUPPLEMENTAL INCOME SCHEDULE
- SCHEDULE F - FARM INCOME AND EXPENSES
- SCHEDULE G INCOME AVERAGING
- SCHEDULES R & RP-CREDIT FOR THE ELDERLY

**FOR MODEL I and MODEL III (32K)
or MODEL II (64K)
WITH 1 OR MORE
DISK DRIVES**

- SCHEDULE SE-COMPUTATION OF SOCIAL SECURITY SELF-EMPLOYMENT TAX
- SCHEDULE TC TAX COMPUTATION
- OUTPUT TO VIDEO OR LINE PRINTER
- FORMATS FOR TRACTOR FEED OR INDIVIDUAL FORM FEED PRINTERS
- AUTOMATIC MEMORY STORAGE FOR INCOME TAX PREPARERS
- INSTANT LINE CHANGE
- BUILT IN ERROR CHECKING

ALL SPECIFICATIONS SUBJECT TO CHANGE

COMPUTRONICS
MATHEMATICAL APPLICATIONS SERVICE™

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

**NEW TOLL-FREE
ORDER LINE
(OUTSIDE OF N.Y. STATE)
(800) 431-2818**

★ A COMPLETE LINE OF ★
PLASTIC OVERLAYS
— and —
TRACTOR FEED FORMS
AVAILABLE

PLEASE SEND ME:

- ☐ PROFESSIONAL INCOME TAX PAC C \$99.95
☐ MODEL II PROFESSIONAL INCOME TAX PAC C \$199.95

- ★ All orders processed within 24-Hours
 ★ 30-Day money back guarantee on all Software
 ★ Add \$3.00 for shipping in UPS Areas
 ★ Add \$4.00 for C.O.D. or NON-UPS Areas within U.S.A.
 ★ Add \$5.00 to Canada and Mexico
 ★ Add proper postage outside of U.S., Canada and Mexico

CREDIT CARD NUMBER _____ EXP. DATE _____

SIGNATURE _____

NAME _____

STREET _____

CITY _____ STATE _____ ZIP _____



**24 HOUR
ORDER
LINE**
(914) 425-1535



BUSINESS COMPUTING™

**THE NEW PUBLICATION
FOR SERIOUS SMALL BUSINESS
COMPUTER USERS**

LEARN HOW TO REALLY USE YOUR COMPUTER

**THE TRUTH ABOUT SOFTWARE
& NEW COMPUTERS & RELATED PRODUCTS**

PUBLISHED BY :COMPUTRONICS:



Limited Offer

TIRED OF GAMES?...Don't understand your computer?...
Can't understand the difference between RAM and ROM?...
Are Computer Magazines and Manuals over your head?

SUBSCRIBE TO

**BUSINESS
COMPUTING™**

**Make your computer work for you in your business...Choose
the right computer...Learn the limits of your computer...The
truth about Business Software.**

SUBSCRIBE TO

**BUSINESS
COMPUTING™**

NOW!

And receive the next 12 Issues at less than half our regular subscription price.

1 YEAR (12 Issues) **\$48.00** (\$120 - Regular Price)

2 YEARS (24 Issues) **\$72.00** (\$240 - Regular Price)

COMPUTRONICS
MATHEMATICAL APPLIED ELECTRONICS

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

*** ALL PRICES AND SPECIFICATIONS SUBJECT TO CHANGE***

*** ADD \$12/YEAR ***
(Canada & Mexico)

*** ADD \$24/YEAR ***
(To All Other Countries)

**NEW TOLL-FREE
ORDER LINE**
(OUTSIDE OF N.Y. STATE)

(800) 431-2818




**24 HOUR
ORDER
LINE**

(914) 425-1535



FILL YOUR STOCKINGS

with software
From Charles Mann & Associates

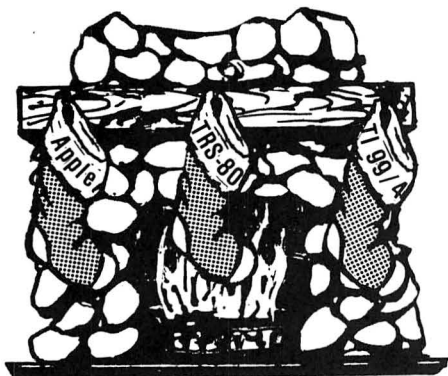


Professional software available for the Doctor, Dentist, Attorney, Contractor, Secretary, Word Processor, School Administrator, and Teacher.

For further information write or call:

Charles Mann & Associates
55722 Santa Fe Trail
Yucca Valley, California 92284
(714) 365-9718

DISK DRIVE WOES?
PRINTER INTERACTION?
MEMORY LOSS?
ERRATIC OPERATION?

Don't Blame The Software!



Power Line Spikes, Surges & Hash could be the culprit!

Pat. #4,259,705

Floppies, printers, memory & processor often interact! Our patented ISOLATORS eliminate equipment interaction AND curb damaging Power Line Spikes, Surges and Hash.

- ISOLATOR (ISO-1) 3 filter isolated 3-prong sockets; integral Surge/Spike Suppression; 1875 W Maximum load, 1 KW load any socket \$62.95
- ISOLATOR (ISO-2) 2 filter isolated 3-prong socket banks; (6 sockets total); integral Spike/Surge Suppression; 1875 W Max load, 1 KW either bank \$62.95
- SUPER ISOLATOR (ISO-3), similar to ISO-1 except double filtering & Suppression \$94.95
- ISOLATOR (ISO-4), similar to ISO-1 except unit has 6 individually filtered sockets \$106.95
- SUPER ISOLATOR (ISO-11) similar to ISO-2 except double filtering & Suppression \$94.95
- CIRCUIT BREAKER, any model (add-CB) Add \$ 8.00
- CKT BRKR/SWITCH/PILOT (-CBS) Add \$16.00

AT YOUR
DEALERS

Master-Card, Visa, American Express
Order Toll Free 1-800-225-4876
(except AK, HI, PR & Canada)

Electronic Specialists, Inc.


171 South Main Street, Natick, Mass. 01760

Technical & Non-800: 1-617-655-1532

ADVERTISING DIRECTORY

Adventure International.....	Cover 4
AGS Software.....	62
Alpha Byte Stores.....	64
Alpha Product	5
American Computer Center	39
Aspen Software.....	21
AT-80	20
Benchmark Software	3
Breeze Computing.....	61
BT Enterprises	34-35
Computer Applications Unlimited	45
Computer Case.....	55
Computer Shopper	29
Computer Trader	6
Cornucopia Software.....	11
C & S Electronics	41
Digital Systems Engineering	57
Dynacomp	27
Electronic Specialists.....	68
Exatron	Cover 3
Exatron.....	23
E-Z Soft Co.	60
Allen Gelder Software.....	61
Hayes Microcomputer Products	Cover 2
H & E Computronics.....	63,65-67
IJG.....	19
IJG.....	31
IJG.....	33
JNL Computer Systems	46
Charles Mann & Assoc.....	68
Med Systems Software.....	62
Micro Architect.....	60
Micro Design	8
Microsette Co	4
Micro Systems Software.....	13
Microtek	25
National Tricor	10
NDM Designs	61
NEBS	32
Options-80	12
Pacific Office Systems.....	62
Percom Data Co.....	6-7
Programmer	61
Prosoft	9
Realty Software.....	12
SBSC.....	43
68 Micro Journal.....	36
Soft Sector Marketing.....	15
Software Affair.....	57
Speedway Electronics.....	47
Sun Technology	59
Van Horn Office Supplies	54
Virginia Micro Systems.....	28
Visible Computer Supply Corp	59
VR Data Corp.....	17

TIRED OF WAITING?

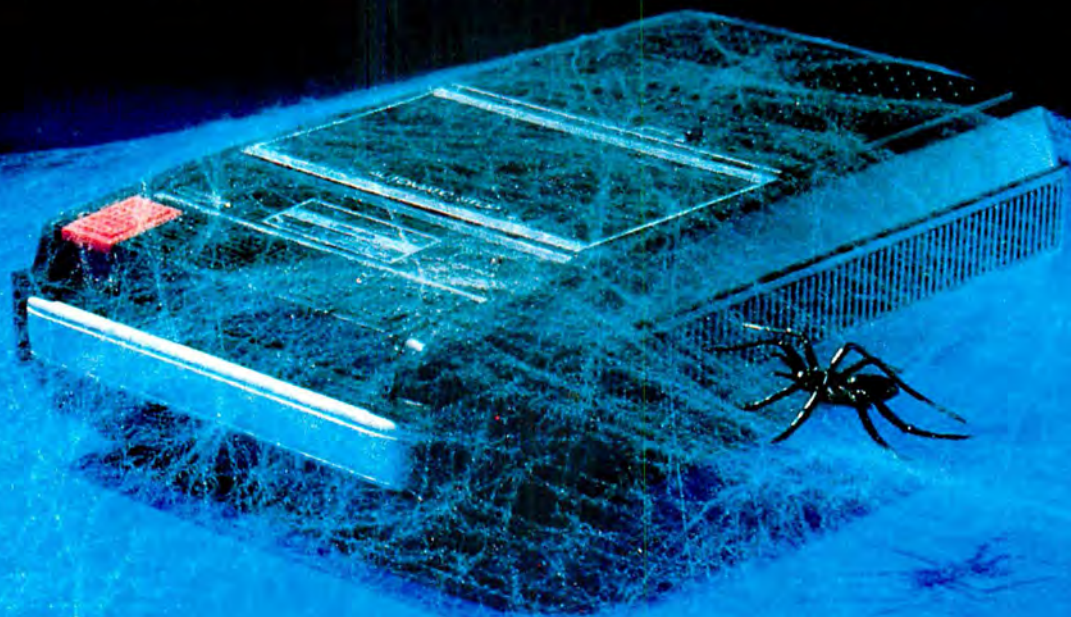

Frustrating isn't it! No matter how much you speed up your program it still seems to take forever to save data onto a cassette. Wouldn't it be great if someone could design a mass storage system with the speed of a disk, but at half the cost? Exatron did, the *Exatron Stringy Floppy (ESF)*.

Totally self-contained, the ESF is an extremely fast, reliable, and economical alternative to cassette or disk storage of programs or data. All of the ESF's operations are under the computer's control, with no buttons, switches, knobs or levers to adjust or forget.

The ESF uses a miniature tape cartridge, about the size of a business card, called a wafer. The transport mechanism uses a direct drive motor with only one moving part. Designed to read and write

digital data only, the ESF suffers from none of the drawbacks of cassettes - without the expense of disks.

Several versions of the ESF are available, for the *TRS-80*, *Apple*, *PET*, *OSI* and an *RS 232* unit. Even the slowest of the units is 15 times faster than a cassette, and all are as reliable as disk drives - in fact a lot of users say they are *more* reliable!



excellence in electronics

exatron

To get further information about the ESF give Exatron a call on their Hot Line 800-538 8559 (inside California 408-737 7111).

If you can't wait any longer then take advantage of their 30 day money-back guarantee, you've nothing to lose but time!

181 Commercial Street
Sunnyvale, CA 94086



COMPUTRONICS
MATHEMATICAL APPLICATIONS SERVICE

50 N. PASCACK ROAD
SPRING VALLEY, NEW YORK 10977

U.S. POSTAGE
STANDARD
BULK RATE
Permit #58
New City, N.Y. 10956

FORWARDING POSTAGE GUARANTEED
RETURN POSTAGE GUARANTEED

StarFighter

The
PENULTIMATE
Space War Game
is **HERE!**

TRS-80*
Model 1 & 3
16K and up — Tape
010-0102 \$24.95
32K and up — Disk
012-0102 \$29.95

CI Adventure
INTERNATIONAL
A DIVISION OF SCOTT ADAMS, INC.

BOX 3435 • LONGWOOD, FL 32750 • (305) 862-6917

ORDER FROM YOUR FAVORITE DEALER
or CALL TOLL FREE (800) 327-7172

SHIPPING & HANDLING CHARGES ARE EXTRA
PRICES SUBJECT TO CHANGE WITHOUT NOTICE

PHOTO COPYRIGHT - DON DIXON

*TRS-80 is registered Trademark of the Tandy Corp.